

**Document Title:**           **KMOS**  
**Data Reduction Library Design &**  
**User Manual**

**Document Number:**   **VLT-MAN-KMO-146611-007**

**Issue:**                       **2.7**

**Date:**                       **07.08.2013**

Document Prepared By:	A. Agudo Berbel E. Wiezorrek R. Davies N. Förster Schreiber	Signature and Date:
Document Approved By:	P. Rees	Signature and Date:
Document Released By:	A. Fairley	Signature and Date:





## Change Record

Issue	Date	Section(s) Affected	Description of Change/Change Request Reference/Remarks
1.1	07.09.07	All	Merging KMOS Data Reduction Library and User Manual
1.2	04.02.08	updated 3.2.1, 5.3, 7.3.4, 9.3.1, 9.3.4, 9.3.5, 9.3.11 inserted & updated 5.1	updated after implementing basic tools 1
1.3	28.10.08	updated 7.3.7, 7.3.9, 7.3.15, 7.3.17, 9.3.7, 9.3.9, 9.3.15, 9.3.17	updated after implementing basic tools 2
1.4.	08.05.09	updated 6.1.1, 6.1.2, 6.1.3, 6.1.4, 7.1.1, 7.1.1, 7.1.2, 7.1.3, 8.2, 9.1.1, 9.1.2, 9.1.3 deleted 8.4 (kmo_split_frame)	updated after implementing calibration recipes 2
1.5.	16.07.09	updated 7.3.8, 9.3.8	updated after implementing basic tools 3
1.6	10.08.10	added sections 4.1, 4.2, 5.5	updated after implementing basic tools 4
1.7	13.04.10	updated 4.3 updated 5.3.3 updated 6.1	templates to change F2L can contain multiple extensions Spec_align recipe obsolete
1.8	10.11.11	All	Issue prepared for TRR
2.2	30.03.12	All	Issue prepared for PAE
2.3		updated 7.1.6	
2.4		updated 3.3	
2.5	10.06.13	whole document	Issue prepared for software verification
2.6	02.08.13	updated 7.3.12 and 7.2.1	kmo_sky_tweak now implemented
2.7.	07.08.13	updated 9.4	

## **Table of Contents**

Change Record .....	2
Table of Contents .....	3
Acronyms and Abbreviations .....	6
Applicable and Referenced Documents .....	7
Stylistic Conventions .....	8
Scope of this Document .....	9
 <b>PART I: DRS DESIGN .....</b>	 <b>10</b>
<b>1 Instrument Description .....</b>	<b>10</b>
1.1 Brief Description .....	10
1.2 Modes and Configurations .....	10
1.2.1 Instrument Flexure .....	10
1.2.2 Inputs .....	11
1.2.3 Outputs .....	11
1.2.4 Data Formats .....	12
1.2.5 CPL .....	12
1.2.6 Pipeline Modes .....	12
<b>2 Mathematical Description .....</b>	<b>13</b>
2.1 Interpolation .....	13
2.1.1 Nearest Neighbour .....	14
2.1.2 Cubic Spline Interpolation .....	14
2.1.3 Modified Shepard's Method .....	15
2.2 Error Propagation .....	16
2.2.1 Initial Noise Estimate .....	16
2.2.2 Mathematical Manipulations .....	16
2.2.3 Combining Datasets .....	17
2.2.4 Extracting Spectra .....	17
2.2.5 Creating Images .....	17
<b>3 Instrument Data Description .....</b>	<b>18</b>
3.1 Orientation of the IFUs on the detectors .....	20
3.2 FITS header keywords .....	21
3.2.1 Primary header .....	21
3.2.2 Extension header .....	22
3.3 Raw file types .....	23
3.3.1 Dark .....	24
3.3.2 Flatfields .....	24
3.3.3 Wavelength .....	24
3.3.4 Standard Star .....	24
3.3.5 Science Object .....	24
3.4 Processing Table .....	24
3.5 IFU Layout in the Mapping Templates .....	25
<b>4 Data Reduction Library Data Structures .....</b>	<b>26</b>
4.1 Classification Tags .....	26
4.2 Intermediate Data Formats .....	27
4.2.1 Detector based floating point products .....	27
4.2.2 1-dimensional detector based products .....	27

4.2.3	Detector based binary digit products .....	28
4.2.4	1-dimensional IFU based products .....	28
4.2.5	2-dimensional IFU based products .....	29
4.2.6	Naming convention .....	30
4.3	External Data Formats .....	30
4.3.1	Lists .....	30
4.3.2	1-dimensional spectra .....	31
4.3.3	Lookup tables .....	31
4.4	Final Output Data Formats .....	31
4.4.1	3-dimensional IFU based products .....	31
4.5	Calibration Data Formats .....	32
4.5.1	Calibration at multiple rotator angles .....	34
4.6	RTD Data Formats .....	34
<b>5</b>	<b>Data Reduction Library QC1 Parameters .....</b>	<b>38</b>
5.1	QC1 Parameter descriptions .....	38
5.1.1	Dark Frames .....	38
5.1.2	Flat Frames .....	39
5.1.3	Wavelength Calibration .....	39
5.1.4	Illumination Correction .....	40
5.1.5	Standard Star Observations .....	41
<b>PART II: DRS RECIPE REFERENCE .....</b>		<b>42</b>
<b>6</b>	<b>Preliminaries .....</b>	<b>42</b>
6.1	Standard workflow .....	42
6.2	Generating Test Data .....	42
6.3	Predefined wavelength ranges .....	43
6.4	Lookup table (LUT) for reconstruction .....	43
<b>7</b>	<b>Recipes .....</b>	<b>45</b>
7.1	Calibration Recipes .....	47
7.1.1	kmo_dark: Master Dark Frames .....	47
7.1.2	kmo_flat: Master Flat Field .....	51
7.1.3	kmo_wave_cal: Wavelength Calibration .....	58
7.1.4	kmo_illumination: Illumination Correction .....	66
7.1.5	kmo_std_star: Telluric Standard Star .....	72
7.2	Science Reduction Recipes .....	80
7.2.1	kmo_sci_red: Processing for Science Data .....	80
7.2.2	kmo_multi_reconstruct: Reconstruct and combine cubes in one processing step .....	88
7.3	Common Recipes .....	95
7.3.1	kmo_arithmetic: Basic Arithmetic .....	95
7.3.2	kmo_combine: Combining Cubes .....	98
7.3.3	kmo_copy: Copy Cube Sections .....	105
7.3.4	kmo_extract_spec: Extracting Spectra .....	108
7.3.5	kmo_fit_profile: Fitting Spectral and Spatial Profiles .....	113
7.3.6	kmo_make_image: Making Images .....	116
7.3.7	kmo_noise_map: Noise Estimation .....	120
7.3.8	kmo_reconstruct: Reconstructing a Cube .....	122
7.3.9	kmo_rotate: Rotating a Cube .....	126
7.3.10	kmo_shift: Translating a Cube .....	129
7.3.11	kmo_sky_mask: Creating a Mask of Sky Pixels .....	132

7.3.12	kmo_sky_tweak: Second Order Sky Subtraction .....	136
7.3.13	kmo_stats: Basic Statistics .....	139
7.3.14	kmo_fits_strip: Stripping FITS files .....	142
7.4	Development Recipes .....	144
7.4.1	kmo_dev_setup: Creating a KMOS-conform FITS file semi-automatically .....	144
7.4.2	kmo_fits_check: Check FITS files .....	149
7.4.3	kmo_fits_stack: Creating a KMOS-conform FITS file manually .....	151
<b>8</b>	<b>Data Reduction Library Functions .....</b>	<b>155</b>
8.1	Acquisition Reduction for RTD .....	155
8.1.1	Description .....	155
8.1.2	Flow Chart .....	156
8.2	Combine frames using pixel rejection .....	157
8.2.1	Description .....	157
8.2.2	Flow Chart .....	158
8.3	Scientific reconstruction of a data cube .....	160
8.3.1	Description .....	160
8.3.2	Flow Chart .....	160
<b>PART III:</b>	<b>DRS Maintainance &amp; Development .....</b>	<b>161</b>
<b>9</b>	<b>Updating the Calibration Data .....</b>	<b>161</b>
9.1	Standard Data Handling at the VLT .....	161
9.2	Alphabetical listing of all calibration files .....	163
9.2.1	Subset of calibration files needed for Karma and RTD (kmclipm) .....	163
9.3	Calibration Schedule .....	165
9.3.1	Every few months to a year or after instrument maintainance .....	165
9.3.2	After instrument maintainance .....	165
9.3.3	Rarely or almost never to renew .....	168
9.4	How to create XCAL, YCAL and LCAL .....	168
<b>10</b>	<b>Updating the DRS version number .....</b>	<b>171</b>
<b>11</b>	<b>Environment variables .....</b>	<b>172</b>
11.1	Variables influencing fitting of slitlet edges .....	172
11.2	Variables influencing wavelength calibration .....	172
11.3	Variables influencing reconstruction .....	173
11.4	Variables influencing RTD reconstruction .....	174
11.5	Variables influencing the debugging .....	174
<b>Appendix A</b>	<b>Data Processing Tables .....</b>	<b>175</b>
<b>Appendix B</b>	<b>The KMOS data interface dictionary .....</b>	<b>177</b>



## **Acronyms and Abbreviations**

ADU	Analog to Digital Unit – unit used to quantify CCD signal intensity
CLIP	C Library for Image Processing
CPL	Common Pipeline Library
DFO	Data Flow Operations Group (ESO Garching)
DFS	Data Flow System
DIT	Detector Integration Time
DO	Data Organiser
DR	Data Reduction
DRL	Data Reduction Library
DRS	Data Reduction Software
ESO	European Southern Observatory
FITS	Flexible Image Transport System
IFU	Integral Field Unit
IPSRV	Image Processing Server
KMOS	K-band Multi Object Spectrometer
LUT	Look-up Table
MPE	Max-Planck-Institut für extraterrestrische Physik
OB	Observation Block
OS	Observing Software
PSF	Point Spread Function
RTD	Real Time Display
QC	Quality Control
UK ATC	United Kingdom Astronomy Technology Centre
USM	Universitäts-Sternwarte der Ludwig-Maximilians-Universität München
WCS	World Coordinate System

## **Applicable and Referenced Documents**

- [AD01] KMOS technical specification, VLT-SPE-ESO-14660-3190, issue 1.0
- [AD02] KMOS Data Reduction Library Specification, VLT-SPE-KMO-146611-001, issue 1.1
- [RD01] KMOS Instrument Software Design Description, VLT-SPE-KMO-146606-003, issue 1.0
- [RD02] Bentley J., Friedman J., 1979, "Data Structures for range searching", ACM Computing Surveys, 11, 397-409
- [RD03] Clark I., Harper W., 2000, "Practical Geostatistics 2000", pub. Geostokos
- [RD04] Yang C.-S. et al., 2004, "12 Different Interpolation Methods", in *Geo-Imagery Bridging Continents*, XXth ISPRS Congress
- [RD05] Lekien F., Marsden J., 2005, "Tricubic interpolation in 3 dimensions", Int. J. Numer. Meth. Engang, 63, 455-471
- [RD06] Renka R., 1988, "Multivariate interpolation of large sets of scattered data", ACM Trans. Math. Software, 14, 139-148
- [RD07] Shepard D., 1968, "A 2-dimensional interpolation function for irregularly spaced data", Proc. 23<sup>rd</sup> Nat. Conf. ACM, 517-523
- [RD08] Farage C., Pimbblet K., 2005, PASA, 22, 249
- [RD09] van Dokkum P., 2001, PASP, 113, 1420
- [RD10] Davies R., 2007, MNRAS, 375, 1099
- [RD11] Cappellari M., Copin Y., 2003, MNRAS, 342, 345



## Stylistic Conventions

The following styles are used in the description of the data reduction to easily identify the type of object being referred to:

- Recipe names

`lowercase_arial`, for example `kmo_flat`.

- Function names

**`lowercase_bold_font`**, for example **`kmo_create_masterdark`**.

- I/O names

*LowerCaseItalics* with each word capitalised, for example *MasterDark*. References to a specific column in a fits table, or extension in a fits file, are denoted by suffixing the name or number, for example *MasterFlat: 2*.

- Parameter names

*lowercase\_underscore\_italic*, with each word separated by an underscore, for example *threshold\_sigma*.

- Keywords

`ALL.UPPERCASE.COURIER.NEW`, for example `RON`. Note that no underscores may be used for keywords





## **Scope of this Document**

This document defines the design of the data reduction library for the KMOS pipeline, including all modules of the DRL to process KMOS data as well as the additional DFS tools. It provides a technical description of the instrument modes, data formats and data processing required for scientific observations, calibrations, and instrument monitoring tasks for KMOS. It is based on the DRL Specification [AD02] and supersedes that document.



## **PART I: DRS DESIGN**

### **1 Instrument Description**

#### **1.1 Brief Description**

KMOS is a multi-object near infrared spectrograph with a spectral resolution of  $R \sim 3000$ , depending on bandpass observed. It comprises 24 arms which can be positioned so as to cover almost any combination of objects within a  $7.2 \text{ arcmin}$  patrol field. Each arm is an integral field spectrometer with a field of view of  $2.8 \text{ arcsec} \times 2.8 \text{ arcsec}$  and a sampling of  $0.2 \text{ arcsec}$  per pixel. So that the light can be dispersed in the conventional way, each field is sliced by a suite of mirrors into 14 slitlets, each 14 pixels long. These are then rearranged by a second suite of mirrors into a single pseudo-longslit. The primary aim of the data processing software is to reconstruct the 3D data cubes from the 2D data on the detectors.

KMOS is designed so that 8 IFU arms are fed into a single spectrograph and have their light dispersed onto a single detector. Thus, in total there are 3 spectrographs and 3 detectors. Each section is identical with all the others. Hence, the format of the data on each detector is, modulo optical alignment and manufacturing tolerances, identical.

KMOS generates its own internal flatfields. For this it uses 2 lamps mounted in an integrating sphere outside the instrument. The light is directed through a sealed tube to another integration sphere in the centre of the cryostat, and thence to each arm. In order to detect light from the flatfield lamps, the arms must be positioned correctly outside the patrol field. It is possible that for some configurations, parts of some arms may be vignetted. In addition, there may be unexpected spatial non-uniformities in the flatfield. As a result it will be possible to make an illumination correction by observing a blank sky field during twilight. This will provide a correction to the spatial (rather than spectral) component of the flatfield.

KMOS has also internal lamps (Argon and Neon) which will be used for wavelength calibration. As an example, these are estimated to produce 35 lines in the K-band with more than 100 counts in a 150-second integration.

#### **1.2 Modes and Configurations**

Although KMOS itself is a complex instrument, the only observing mode available is multiple integral field spectroscopy.

The only instrument configuration that the observer can make (and which has an impact on the subsequent data reduction, with respect to the appropriate calibration data) involves the wavebands – for each of which there is a single fixed spectral format and range, and a fixed filter. The wavebands offered cover near-infrared wavelengths from  $0.8 \mu\text{m}$  to  $2.5 \mu\text{m}$ , and hence the observing strategy is the same for all bandpasses.

##### **1.2.1 Instrument Flexure**

KMOS is mounted at a Nasmyth focus of the VLT and hence rotates. It is therefore inevitable that there will be at least some flexure. For individual exposures, the most noticeable impact (i.e.

elongated PSF) will be when the telescope is pointing close to zenith and the parallactic angle is changing rather quickly. However, calculations suggest that spatial flexure will be very small (less than 1 pixel). On a scheme how to handle this can be found in Sec. 4.5.1.

On the other hand, spectral flexure is expected to be significant: exceeding the Technical Specification on wavelength accuracy. Although mechanical solutions have been investigated, it has been decided that it is more reliable, more accurate, and simpler to correct this in software rather than hardware. Since science exposures will typically have integration times of at least a few minutes, the OH sky lines will be bright and clear in individual frames. The processing will reconstruct an initial cube from each science frame using the wavelength solution derived from the arc lamp. It will then measure the wavelength offset of the frame by comparing the observed wavelengths of the OH lines with respect to their theoretical wavelengths. This offset will be folded back into the wavelength solution and the cube reconstructed anew from the raw data (and the initial reconstruction will be deleted). Thus correcting the spectral flexure will not compromise the quality of the data by requiring additional interpolation steps.

### **1.2.2 Inputs**

The DRS pipeline receives as input:

- Raw images from KMOS as a single file with 3 extensions
- Calibration data, of which there are two types:
  - master calibrations, generated by the pipeline, typically from daytime calibrations
  - ancillary data such as reference line catalogues

### **1.2.3 Outputs**

The KMOS DRS pipeline creates the following data:

- 3D cubes, which are calibrated in wavelength, spatial position, and flux.
- associated error cubes (as FITS extension)
- QC1 parameters and performance monitoring values.

It should be noted that spectra will be extracted for standard star observations, in order to generate the necessary telluric corrections. But in general spectra will not be extracted from science observations, although it would in principle be possible to do this using exactly the same technique and recipe as for standard stars. The reason is that often it is not obvious from which spatial pixels the spectrum should be taken. This is particularly true for observations of high redshift galaxies (one of the primary science drivers of KMOS), where continuum emission is either very weak or even undetected. Attempting to extract spectra automatically from fields where either the object of interest is very faint or there are multiple objects, can lead to misleading and confusing results. On the other hand, extracting a spectrum manually is very quick and easy to do within QFitsView. As one moves the cursor across the displayed image of the spatial field of view, it enables one to see *in real time* integrated spectra from different groups of spaxels. This tool is already available at Paranal, and users are recommended to use it to do exactly this. QFitsView also enables the user to create a collapsed image from the cube (or even a linemap) across any wavelength range in an equally straightforward and speedy manner.

While bad pixel masks are generated during the processing, these are not part of the output. The main reason is that due to the necessary interpolation step, there does not exist a one-to-one correspondence between pixels in the final cube and pixels on the detector. However, the impact



of bad pixels is reflected in the noise cube which is created along with the data cube (see Section 2.2). Bad pixels are simply ignored during the interpolation. This will result in a local increase in the noise, which will be apparent in the noise cube.

## 1.2.4 Data Formats

Only standard FITS data formats with extensions are used for tables, 2D and 3D images. ASCII files are used for parameter files (e.g. EsoRex or Gasgano configuration files).

## 1.2.5 CPL

The DRS recipes are written in standard ANSI/ISO-C99 C using the ESO Common Pipeline Library CPL.

## 1.2.6 Pipeline Modes

The DRS pipeline will be able to run in 3 specific default modes which are built from the same set of recipes but with different input parameters, and 1 more general mode. These are:

*Acquisition pipeline mode:* this will run on Paranal in real time to aid in acquiring targets. In order to achieve the maximum speed, a number of stages will be omitted and the reconstructed data will be approximate (although sufficient for the task in hand); the final output will be a set of images.

*On-line pipeline mode:* this will run on Paranal in quasi real time in an automated manner with a primary goal of monitoring the scientific results from execution of an OB, and generating initial QC parameters.


*Off-line pipeline mode:* this will be run by the DFO in Garching in order to generate all necessary calibration products, which will be certified by the DFO and archived. It will also be used to generate reduced frames from service mode observations, which are then sent to the proposer.

*Desktop Processing:* the pipeline can be run by an observer at their home institution using the EsoRex and Gasgano tools. External software such as QFitsView can be used to view intermediate and final data products; the observer can freely select all parameters; and if required add in their own processing steps.

## 2 Mathematical Description

### 2.1 Interpolation

In KMOS, reconstruction of a (rectilinear) 3D datacube from raw 2D data will be performed in a single step. This is no more risky or difficult than interpolating in 2-dimensions. However, being able to conceptualise it requires that the calibrations are viewed in a particular way. Traditionally, calibrations are considered to be the mathematical functions (polynomials) which allow one to correct the curvature in the recorded data. Instead, calibrations should be considered as a look-up table associating each data value in the raw frame with its  $(x, y, \lambda)$  position in the reconstructed cube. This is shown graphically in Figure 1, where the calibration look-up tables would allow one to go from (a) to (b).

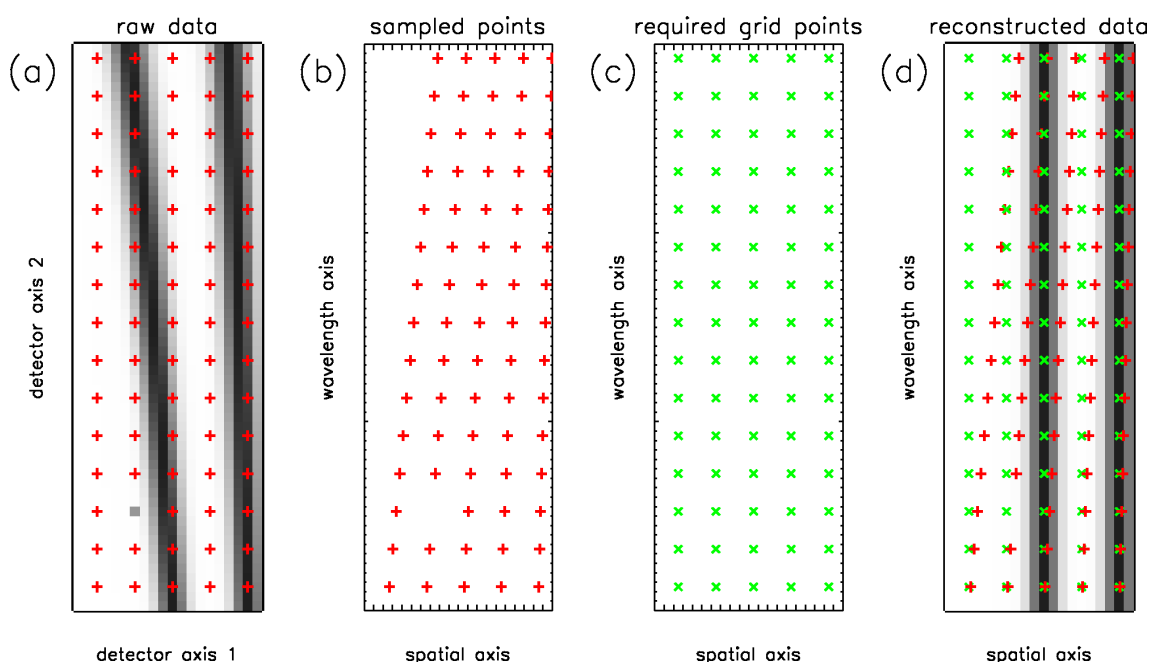

**Figure 1:** Illustrative example of the perspective required in order to interpolate in 3D. (a) Observed data are sampled regularly in the reference frame of the detector. (b) This sampling is irregular in the reference frame of the reconstructed cube; bad pixels can simply be omitted from the set of sampled points. (c) One can freely specify the required gridding (i.e. spatial/spectral pixel scale) for the reconstructed data; it is independent of the actual sampling. (d) Each required grid point is interpolated from the sampled points which lie in its neighbourhood. Any suitable algorithm (see below) can be used for the interpolation.

The recorded data on the detector can then be considered as a set of values at irregularly spaced sampling positions in the final cube. Once this is done, one can dissociate the data completely from the detector frame and simply generate a list of values and positions:

value<sub>0</sub>, x<sub>0</sub>, y<sub>0</sub>, λ<sub>0</sub>  
value<sub>1</sub>, x<sub>1</sub>, y<sub>1</sub>, λ<sub>1</sub>  
...  
value<sub>n</sub>, x<sub>n</sub>, y<sub>n</sub>, λ<sub>n</sub>

Each grid position in the reconstructed cube is interpolated from its nearby neighbours, which are selected from this list of data values. Bad pixels are simply excluded from the list. Doing this brings a number of advantages:

- The 3D datacube can be reconstructed in a single step, improving the noise properties of the final dataset
- One can combine frames during the interpolation by concatenating as many lists as required from various raw frames; this simply increases the number of sample points close to each interpolated grid point.
- One can choose the sampling of the reconstructed cube arbitrarily. This is useful if one wishes to compare the data to that from another instrument: the KMOS data can be directly reconstructed at a matching pixel scale.
- The data can be smoothed during the reconstruction (for some algorithms), simply by increasing the size of the local neighbourhood from which sampling points are taken.

It is fortunate that there are many different schemes available for interpolating points in 3-dimensional space, since no single one is optimal for every situation. Each has its advantages and disadvantages. It is for this reason that we will make several schemes available. In this section the methods we propose to include within the KMOS data reduction software are described. While these are all standard methods, few have actually been applied extensively to astronomical data. It is not practical to provide a full description of each here, and so only the salient points are described. The reader is referred to various references for further details.

## 2.1.1 Nearest Neighbour

This is the simplest, and also one of the fastest, methods imaginable for interpolation: one simply adopts the value of the nearest data point. This method is included since no additional noise is added during the interpolation process, and as a result there may be instances when an observer wishes to use this method: e.g. when signal-to-noise is more critical than optimal spatial/spectral accuracy. The efficiency of this method can be enhanced using the cell method developed by Bentley & Friedman (1979) [RD02]. A script called `ngp.pro` which performs this interpolation is available from the IDL Astronomy User's Library.

This method is available in the KMOS pipeline as value “NN” in the corresponding parameter settings.

## 2.1.2 Cubic Spline Interpolation

Cubic spline interpolation is a standard technique which is discussed in detail in, amongst others, Numerical Recipes. As far as we are aware, it is applied commonly throughout astrophysical data. The goal of a cubic spline is to get a formula that is smooth in the first derivative and continuous in the second derivative, not only within an interval but also at its boundaries. We will use the natural cubic spline, which has zero second derivative at its boundaries.

The issue here is how to apply it in 3 dimensions. A method has been developed by Lekien & Marsden (2005) [RD05] which does this; but it requires that the data are gridded regularly. While the KMOS data are gridded regularly on the detector, their position  $(x, y, \lambda)$  is not uniform and therefore it would be quite difficult to apply this method – indeed to do so one would need to calculate accurately where on the detector any particular point in  $(x, y, \lambda)$  would fall.

The alternative most commonly employed is to perform multiple 1-dimensional interpolations. This makes the cubic spline method relatively straight forward mathematically. One useful characteristic of the data in this respect is the fact that the pixel spacing perpendicular to the slitlets in each IFU is regular – which, due to optical distortions, is not the case either along each slitlet or along the spectral axis. One can then perform the first set of interpolations along this axis and then propagate the regular spacing to the other dimensions.

This method is available in the KMOS pipeline as value “BCS” in the corresponding parameter settings.

## 2.1.3 Modified Shepard’s Method

This fits a smooth function to a set of data points scattered in 3 dimensions using a modification by Renka (1988) [RD06] of a method developed by Shepard (1968) [RD07]. The necessary algorithms are part of the NAG library (their `nag_3d_shep_interp` and `nag_3d_shep_eval` routines). It is also available in IDL as the `grid3.pro` routine.

The original basic method constructs a function  $Q(x,y,z)$  which interpolates a set of  $m$  scattered data points at positions  $(x_i, y_i, z_i)$  and having values  $f_i$  with a weighted mean:

$$Q(x, y, z) = \frac{\sum_{i=1}^m w_i(x, y, z) f_i}{\sum_{i=1}^m w_i(x, y, z)}$$

where the weights are simply

$$w_i(x, y, z) = \frac{1}{(x - x_i)^2 + (y - y_i)^2 + (z - z_i)^2}$$

The modification is that the method is made local by truncating the weights  $w_i$  beyond a specified distance  $R_w$ .

This method is available in the KMOS pipeline as value “*swNN*” in the corresponding parameter settings, where the truncation radius can be specified (recommended box size is 1.1 pixels). An analogous linear distance weighted scheme is also available under the name “*lwNN*”.

We note that in the full Modified Shepard’s method, the performance is improve by replacing each  $f_i$  by  $q_r(x,y,z)$  which is a quadratic fitted by weighted least-squares to local data (i.e. within a radius  $R_q$ ). The resulting surface is continuous and has continuous first partial derivatives. It is the calculation of each  $q_r(x,y,z)$  that takes most of the processing time, but nevertheless the method is remarkably fast, as shown by Yan et al. (2004). The radii  $R_w$  and  $R_q$  are chosen to be large enough to include  $N_w$  and  $N_q$  data points respectively, and it is these latter numbers that define how localised the interpolant is. For smaller numbers, the interpolation only uses local data and so is faster but possibly less accurate; for larger numbers the computational cost is higher. The method is not thought to be particularly sensitive to the choice of these parameters and typical values of  $N_w = 32$  and  $N_q = 17$  seem to work well, based on experimental results reported by Renka (1988).



## 2.2 Error Propagation

One of the goals of the pipeline is to produce (at least a reasonable approximation to) an error cube to complement the final reduced and combined data cube. This is an important consideration since the noise is strongly wavelength dependent – being affected most by the presence of OH lines and the thermal background. In addition, in a combined cube, the noise will be spatially dependent.

In principle creating a noise cube ought to be straight forward since the basic mathematics of error propagation are straight forward and well known. In practice, this is not so, most notably due to systematic effects when combining different datasets. Any useful estimate of the error should include these, and as a result our methods assess the noise from the data themselves rather than simply propagating a formal estimate.

### 2.2.1 Initial Noise Estimate

It is assumed that the gain (e-/ADU) and the readnoise (e-) are either known or can be measured. In this case the noise in any raw 2D frame can be found (or strictly, only estimated, because the counts measured are themselves subject to noise) simply as

$$\sigma(ADU) = \frac{\sqrt{\text{counts} \times \text{gain} + \text{readnoise}^2}}{\text{gain}}$$

This relation can be tested as follows: for a large number (e.g. 20) identical exposures, the standard deviation between the values at each position on the detector should be equal to  $\sigma$  as estimated above. Alternatively, since the readnoise is approximated by the noise in a frame with exposure time of MINDIT, this same method can be used to derive the gain.

### 2.2.2 Mathematical Manipulations

The recipe `kmo_arithmetic` allows one to perform mathematical manipulations on the data. For these cases, the errors can be propagated in a strictly mathematical way. This applies similarly to the recipes `kmo_rotate` and `kmo_shift`. We have ignored covariance terms since they are expected to be small for uncorrelated data.

For example, if one adds (or subtracts) two frames then (ignoring cross terms) the noise adds in quadrature.

$$\text{if } x = au + bv \text{ then } \sigma_x = \sqrt{a^2 \sigma_u^2 + b^2 \sigma_v^2}$$

And if one multiples (or divides) two frames, then (again ignoring cross terms) the noise combines as:

$$\text{if } x = auv \text{ then } \frac{\sigma_x}{x} = \sqrt{\frac{\sigma_u^2}{u^2} + \frac{\sigma_v^2}{v^2}}$$

Similarly, raising a number to some power

$$\text{if } x = au^b \text{ then } \frac{\sigma_x}{x} = b \frac{\sigma_u}{u}$$



And lastly, for exponentials and logarithms one has

$$\text{if } x = ae^{bu} \text{ then } \frac{\sigma_x}{x} = b\sigma_u$$

and

$$\text{if } x = a \ln(bu) \text{ then } \sigma_x = a \frac{\sigma_u}{u}$$

### 2.2.3 Combining Datasets

We described two methods for estimating the noise in the result when multiple cubes are combined. Both of these options will be available; the latter will be the default.

If one is combining cubes which have either small spatial dithers between them (i.e. multiple exposures of the same field) or large dithers (i.e. in order to mosaic a larger field) one can in principle use the formal relations above to combine the individual error estimates. Thus

$$\sigma_{\text{combine}} = \frac{1}{n} \sqrt{(\sigma_1^2 + \sigma_2^2 + \dots + \sigma_n^2)}$$

where there are pixels overlapping. For all image regions where there is no overlap one simply propagates the noise estimate directly.

While this can always be applied, it has a disadvantage in that it does not take into account systematic effects between the different data sets being combined (e.g. offsets in the background level). Thus an alternative method which will be offered is to estimate the noise directly from the standard deviation of the pixel values at each spatial/spectral position. This has the advantage that one can iteratively reject values which lie outside a threshold defined in terms of the standard deviation of the (remaining) pixels – thus yielding a better mean value in the combined cube.

The only restriction is that such a noise estimate can only be made if there are at least 3 values available at any given spatial/spectral position; in practice positions where this criterion is not met will simply be assigned a noise of NaN.

### 2.2.4 Extracting Spectra

The process of extracting a spectrum from a datacube is simply adding up spectra within a given aperture (possibly weighted appropriately). The noise can therefore be propagated from the cube to the spectrum very simply, by using the relation for a weighted sum given in Section 2.2.2.

### 2.2.5 Creating Images


Images are created simply by collapsing the cube along its spectral axis within specified wavelength ranges (and perhaps also excluding some intermediate wavelength ranges). As for spectra, the noise can therefore easily be propagated using the relation for a weighted sum in Section 2.2.2.

### 3 Instrument Data Description

The aim of this section is to describe the structure of the raw data produced by KMOS, which corresponds to the RAW format.


KMOS comprises 24 IFUs, each of which has  $14 \times 14$  spatial pixels and approximately 2000 spectral pixels. The data from these are recorded by three  $2k \times 2k$  HAWAII 2RG detectors, with 8 IFUs assigned to each detector. The field of each IFU is sliced into 14 slitlets which are rearranged along a pseudo-longslit and then dispersed. The raw data for each IFU therefore consists of 14 sets of standard 2-dimensional (1 spatial, 1 spectral) slit spectra, which is arranged next to each other on the detector, separated by a few blank pixels. The same pattern is repeated 8 times for each of the 3 detectors. A single exposure therefore produces approximately 50Mb data. Figure 3 illustrates how the data appears on each detector. See also Figure 19 for an illustration of how the raw data appears in the RTD.

A single integration with KMOS will produce three 2-dimensional frames, each  $2048 \times 2048$  pixels, stacked in 3 extensions of a single fits file with an empty primary header.



**Figure 2** Format of a RAW file as the instrumentation software delivers it. The value for the EXTNAME keyword can be seen in the blue rectangles.

Calibration observations are performed in a standard way and typically yield data with a similar format: darks, flats, wavelength calibration and spectral curvature. The exceptions are the illumination correction and standard stars.

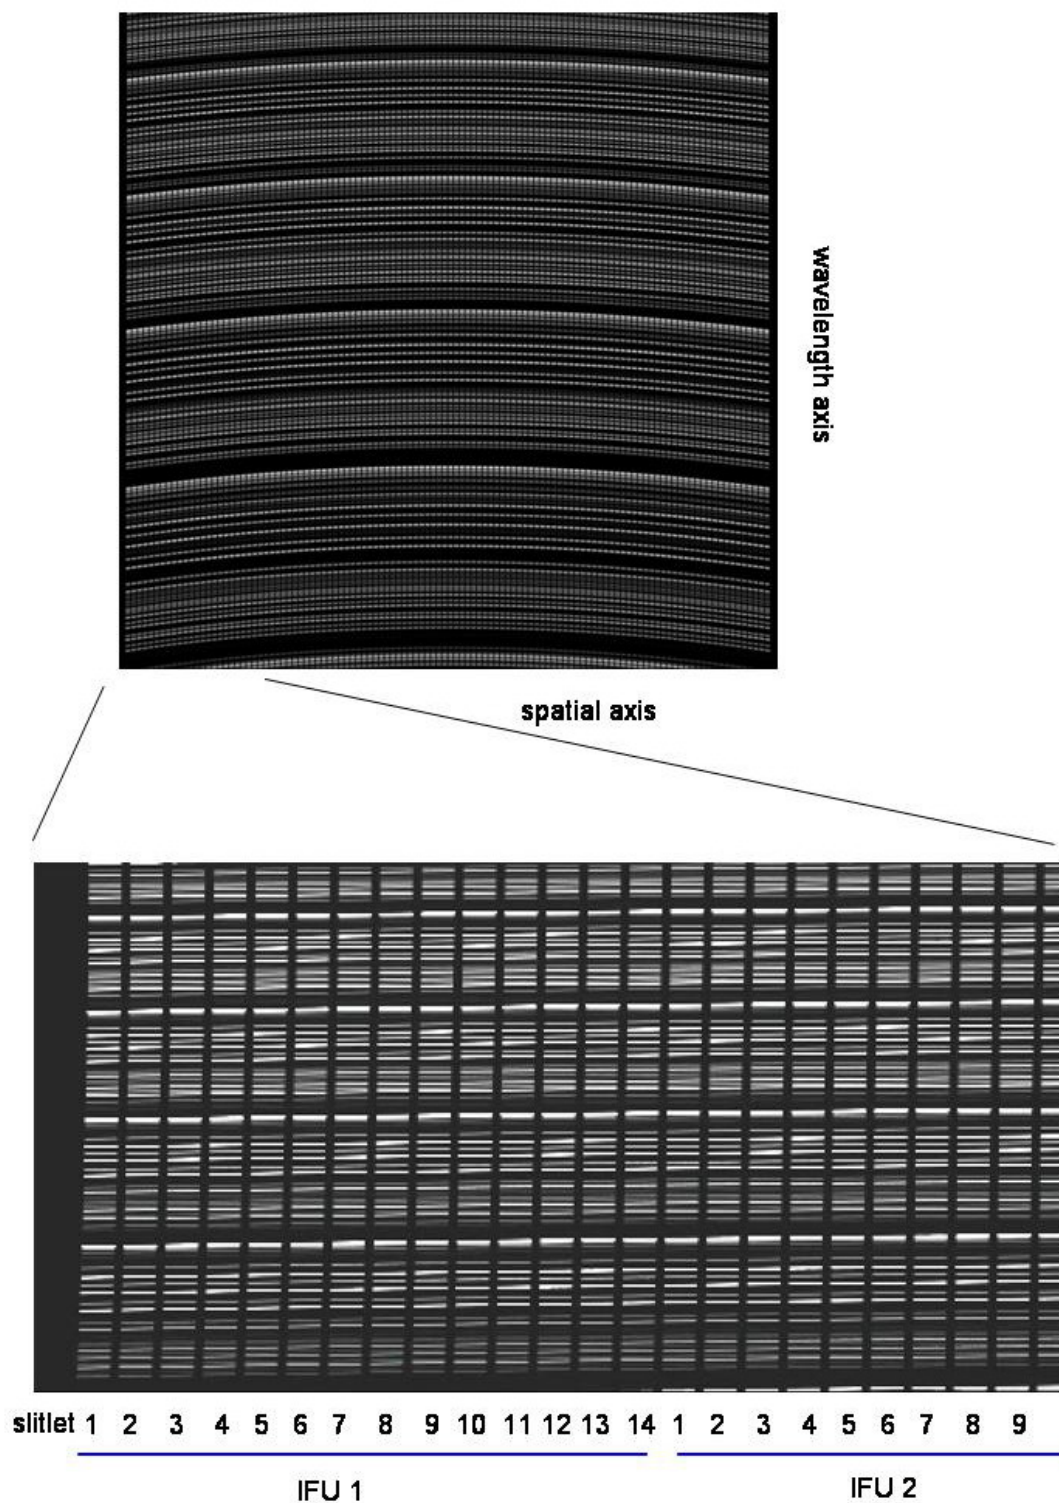

**Figure 3** - illustrative layout of the data format on each detector (curvature has been enhanced for visual purposes). Upper panel: full detector showing OH emission lines on the H-band; Lower panel: left side, stretched to show individual slitlets within each IFU are arranged.

### 3.1 Orientation of the IFUs on the detectors

Due to the optical path realised in the KMOS instrument the spatial orientation of the IFUs on the detector frames isn't the same for all of them, as one would expect intuitively. The orientation of a reconstructed slitlet of an IFU can be flipped or rotated. The orientation of the wavelength axis never changes. The wavelength is always lowest at the bottom and highest at the top of the detector frame as depicted in Figure 3.



**Figure 4** Numbering of pixels and slitlets as they are referenced to in **Figure 5**


For IFUs 17, 18, 19, and 20 the pixels in a slitlet are orientated from left to right and the slitlets are stacked from top to bottom.

For IFUs 21, 22, 23 and 24 the pixels in the slitlet are oriented just the other way round, from right to left. As well the stack orientation is flipped, it goes from bottom to top.

Whereas in IFUs 1, 2, 3, 4, 13, 14, 15 and 16 the slitlets are oriented vertically from bottom to top. The stacks are stacked from left to right.

Finally in IFUs 5, 6, 7, 8, 9, 10, 11 and 12 the slitlets are also vertical but go from top to bottom and they are stacked from right to left.


ON SKY



+Z corresponds to North and  
+Y to East when rotator offset  
angle is zero


IFUs:

1, 2, 3, 4, 13, 14, 15, 16

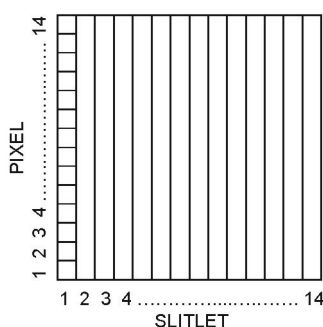


IFUs:

17, 18, 19, 20

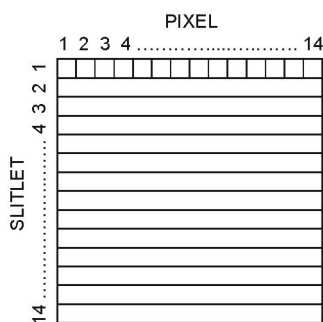


IFUs:

5, 6, 7, 8, 9, 10, 11, 12



IFUs:

21, 22, 23, 24



**Figure 5** Orientation of the slitlets for the different IFUs

## 3.2 FITS header keywords

The tables below define the FITS header keywords which are required by the data reduction pipeline. The Instrumentation Software will provide these keywords in the headers of raw frames – see KMOS Instrument Software Design Description [RD01].

### 3.2.1 Primary header

Keyword	value	comment
DATE	string	Date the file was written
DATE-OBS	string	Observing date



EXTEND	bool	There may be FITS extensions
NAXIS	int	number of array dimensions
NAXIS1	int	# of pixels in axis1
NAXIS2	int	# of pixels in axis2
HIERARCH ESO DET NDIT	int	Number of detector integrations
HIERARCH ESO DET SEQ1 MINDIT	double	Minimum DIT
HIERARCH ESO OBS ID	int	Observation block ID
HIERARCH ESO INS FILTi ID (i=1-3)	string	Filter unique id
HIERARCH ESO INS GRATi ID (i=1-3)	string	Grating unique ID
HIERARCH ESO INS LAMPi ST (i=1-4)	bool	arc lamp status (on/off), i=1,2 flatfield lamp status (on/off) , i=3,4
HIERARCH ESO OCS ARMi ALPHA (i=1-24)	double	RA centre of arm i (J2000)
HIERARCH ESO OCS ARMi DELTA (i=1-24)	double	Dec centre of arm i (J2000)
HIERARCH ESO OCS ARMi NAME (i=1-24)	string	Target name hosted by arm i
HIERARCH ESO OCS ARMi NOTUSED (i=1-24)	string	String containing error message. If keyword isn't present, then the arm is functional
HIERARCH ESO OCS ARMi TYPE (i=1-24)		
HIERARCH ESO OCS ROT OFFANGLE	double	Rotator offset angle
HIERARCH ESO OCS TARG DITHA	double	Telescope dither in ALPHA [arcsec]
HIERARCH ESO OCS TARG DITHD	double	Telescope dither in DELTA [arcsec]

### 3.2.2 Extension header

Keyword	value	comment
EXPTIME	double	Integration time
EXTNAME	string	string describing the extension
NAXIS	int	number of data axes
NAXIS1	int	length of data axis 1
NAXIS2	int	length of data axis 2
XTENSION	string	IMAGE extension
HIERARCH ESO DET CHIP GAIN	double	Gain in e-/ADU
HIERARCH ESO DET CHIP INDEX	int	Chip index
HIERARCH ESO DET CHIP RON	double	Read-out noise in e-

The reduction pipeline updates the headers in a way that information applying to all frames is stored in the empty primary header. Detector or IFU specific information is stored in the subsequent headers (see also section 4).



### 3.3 Raw file types

The raw files are generated using different templates that represent the available modes to use KMOS with. When a template is executed the following keywords are written into all generated files:

- HIERARCH ESO DPR TYPE (unique identifiers to perform DO categorisation)
- HIERARCH ESO DPR CATG (qualitative category of the file)
- HIERARCH ESO DPR TECH (technical category of the file)
- HIERARCH ESO OCS TEMPL ID (the applied template)

With these keywords it is possible for the Data Organiser (DO) to classify the files and provide the corresponding DO category that is needed to run the KMOS pipeline properly.

The raw files with DPR.TECH equal IMAGE or SPECTRUM require no reconstruction of the data cubes. In these cases the data will be treated as the simple 2D frame that it is.

DO category	DPR TYPE	DPR CATG	DPR TECH	OCS TEMPL ID
DARK	DARK	CALIB	IMAGE	KMOS_spec_cal_dark
FLAT_ON FLAT_OFF	FLAT, LAMP FLAT, OFF	CALIB CALIB	SPECTRUM IMAGE	KMOS_spec_cal_calunitflat
ARC_ON ARC_OFF	WAVE, LAMP WAVE, OFF	CALIB CALIB	SPECTRUM IMAGE	KMOS_spec_cal_wave
FLAT_SKY	FLAT, SKY	CALIB	IFU	KMOS_spec_cal_skyflat
STD	OBJECT, SKY, STD, FLUX	CALIB	IFU	KMOS_spec_cal_stdstar KMOS_spec_cal_stdstarscipatt
SCIENCE	OBJECT, SKY	SCIENCE	IFU	KMOS_spec_obs_nodtosky KMOS_spec_obs_stare KMOS_spec_obs_mapping8 KMOS_spec_obs_mapping24 KMOS_spec_obs_freedither

The following DO categories are not used in the pipeline itself.

Although acquisition frames will need to be processed in order to reconstruct the acquisition images needed for the real time display, the recipe will be triggered by CLIP rather than any header keywords (because the frames do not have headers at this stage).

For acquisition frames one exposure will have objects in (some) arms and the subsequent exposure will be of blank sky fields. However, for most science observations, this will not be the case: in any single exposure some arms will be on sky and some arms will be on objects.

DO category	DPR TYPE	DPR CATG	DPR TECH	OCS TEMPL ID
ACQ_OBJ	OBJECT	ACQUISITION	IFU	KMOS_spec_acq KMOS_spec_acq_lutatcfstars
ACQ_SKY	SKY	ACQUISITION	IFU	KMOS_spec_acq KMOS_spec_acq_lutatcfstars
ACQ_STD	OBJECT, SKY	ACQUISITION	IFU	KMOS_spec_acq_stdstar KMOS_spec_acq_stdstarscipatt

The technical templates do not require specific data processing other than reconstructing the cubes. All measurements of the source size and position will be done afterwards manually.

DO category	DPR TYPE	DPR CATG	DPR TECH	OCS TEMPL ID
FOCUS	LAMP, FOCUS	TECHNICAL	SPECTRUM	KMOS_spec_tec_focus
LOOKUP	OBJECT, LOOKUP	TECHNICAL	IMAGE	KMOS_spec_tec_lutatcfstars



### **3.3.1 Dark**

File types: DARK

These frames are observed with the filter wheel in a ‘blocked’ position. Dark frames are used as the OFF frames for the illumination correction.

### **3.3.2 Flatfields**

File types: FLAT\_ON, FLAT\_OFF, FLAT\_SKY

The standard flatfield is illuminated by a pair of lamps via an integrating sphere. Each set of flatfields FLAT\_ON has an associated set of FLAT\_OFF frames, taken immediately before (although in principle a standard dark frame could suffice). In case there are spatial non-uniformities in the flatfield, and also to take into account vignetting further upstream in the light path, an illumination correction can be performed. Since this is taken on sky, a dark frame is used as the corresponding OFF frame. The edges of the illuminated regions of the flatfields can also be used to trace the spectral curvature.

In order to measure the spectral curvature and calibrate KMOS while it is mounted, the edges of the illuminated regions in the flatfields will be traced. This provides 2 traces per slitlet. As a result one has to assume that the magnification as a function of wavelength is uniform across the slitlet.

### **3.3.3 Wavelength**

File types: ARC\_ON, ARC\_OFF

These frames are illuminated simultaneously by Ar and Ne arc lamps. Each ARC\_ON frame has an associated ARC\_OFF frame, taken immediately before (although in principle a standard dark frame could suffice).

### **3.3.4 Standard Star**

File types: STD (object and sky)

This type identifies observations of a telluric standard star. In addition, for the many such stars where the magnitude is well known, these also provide the photometric calibration. Because the standard stars are observed in an IFU, there are no issues associated with limited slit width, seeing corrections, etc.

### **3.3.5 Science Object**

File types: SCIENCE (object and sky)

These frames are illuminated by a science target. It should be noted that in most cases, for any particular exposure only some of the 24 IFUs will be on objects and the rest will be on sky. The necessary keywords OCS.ARMi.TYPE indicating whether each individual IFU is on sky or on object in any particular frame are written into the header by the OS.

## **3.4 Processing Table**

The different recipes for generating calibration and science products are listed in the Data Processing Tables in Appendix A. These relate the various calibration recipes to their respective raw data types. The tables connect the classification keywords, the DO category, and the observing template. Required input from the calibration database is indicated, as are the final



products. A summary of the main processing steps is given, as are the FITS header keywords needed by the recipe.

### 3.5 IFU Layout in the Mapping Templates

The mapping modes of KMOS have specific templates to perform the observations. But the data are treated by the pipeline in exactly the same way as for any other science observation.

It is often useful to know which IFUs in which exposures makes up the various parts of the patchwork mosaic. Figure 6 and Figure 7 show this information for the 8-arm and 24-arm mapping modes respectively.

21	2	3	8
20	15	14	9

A	B	C
D	E	F
G	H	I

**Figure 8** Left – Arrangement of the IFUs used in the template `KMOS_spec_obs_mapping8` used for the Mapping8 mosaic mode. Right – order (from A to I) of the 9 dithers performed during the Mapping8 mode. The IFUs are separated by 8.1'' and each dither is 2.7'' so that, at the end, there is a 0.1'' (half-pixel) overlap between adjacent pieces.

23	24	1	3	5	6
21	22	2	4	8	7
19	20	16	14	10	9
18	17	15	13	12	11

A	B	C	D
E	F	G	H
I	J	K	L
M	N	O	P

**Figure 9** Left – Arrangement of the IFUs used in the template `KMOS_spec_obs_mapping24`. Right – order (from A to P) of the 16 dithers performed during the Mapping24 mode. The IFUs are separated by 10.8'' and each dither is 2.7'' so that, at the end, there is a 0.1'' (half-pixel) overlap between adjacent pieces.

## 4 Data Reduction Library Data Structures

During the different processing steps, the raw data is modified and associated with additional information, which is either produced during the reduction or originates externally. The resulting data types are described in this section.

Note that in both of these tables, the file type is given as a 3-character identification:

- the first character refers to whether the data in the file is stored as a floating point number ('F', number of bits unspecified) or a binary digit ('B');
- the second character indicates the dimension of the data (1, 2, or 3);
- the third character indicates whether the data refers to a complete detector array ('D'), an individual IFU ('I'), a look-up table or list ('L'), or a spectrum of arbitrary size ('S').

### 4.1 Classification Tags

The classification of intermediate and final data products that will be generated by the calibration recipes and pipeline is given below, together with the recipe which generates them and a brief description of the product:

<i>PCATG</i>	<i>file type</i>	<i>recipe</i>	<i>description</i>
MASTER_DARK	F2D	kmo_dark	- dark frame (including noise map)
MASTER_FLAT	F2D	kmo_flat	- flatfield frame (including noise map)
XCAL	F2D		- spatial solution lookup frame
YCAL	F2D		- spatial solution lookup frame
LCAL	F2D	kmo_wave_cal	- wavelength solution lookup frame
ILLUM_CORR	F2I	kmo_illumination	- illumination correction to flatfield
TELLURIC	F1I	kmo_std_star	- normalised telluric spectrum (including noise map)
STAR_SPEC	F1I		-extracted star spectrum
STD_IMAGE	F2I		-images from a standard star cube collapsed along the spectral axis
STD_MASK	F2I		- mask used for extracting the spectra
SCI_COMBINED	F3I	kmo_sci_red	- reconstructed and combined science cubes (including noise map)
SCI_RECONSTRUCTED	F3I		- intermediate reconstructed science cubes (including noise map)

The classification of ancillary external data files is given below:

<i>PCATG</i>	<i>file type</i>	<i>description</i>
ARC_LIST	F1L	list of arc line wavelengths & strengths
OH_LIST	F1S	spectrum of OH line wavelengths & strengths
ATMOS_MODEL	F1S	high resolution model spectrum of atmospheric transmission
SOLAR_SPEC	F1S	high resolution solar spectrum
SPEC_TYPE_LOOKUP	F2L	lookup table to find stellar effective temperature from spectral type and luminosity class

The various formats are detailed in the following subsections.

## 4.2 Intermediate Data Formats


All files have an empty primary header, data and noise maps are stored in extensions as described below.

### 4.2.1 Detector based floating point products

File Type: F2D

PCTAG: MASTER\_DARK, MASTER\_FLAT

For these files, the detector pixel space (i.e. 2048×2048 pixels) is still the reference frame in which the data are stored. The data of each detector is stored in an extension of the FITS file. for the dark and flat frames), these will be stored in extensions of the same FITS file. In this case the first extensions will contain the data of the first detector, the second extension will contain the associated noise map and so on.

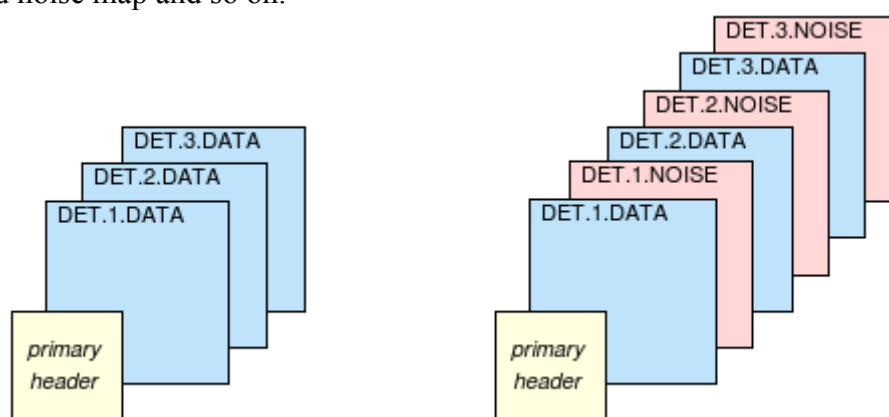


**Figure 10** The two valid configurations of a F2D-frame either with or without noise maps. The value for the EXTNAME keyword can be seen in the blue and red rectangles.

### 4.2.2 1-dimensional detector based products

File Type: F1D

PCTAG: -

These files can be created by some intermediate recipes, e.g. kmo\_stats. When statistics are to be calculated from a detector based frame, then the output frame follows the same naming convention. F1D frames can either have one or three extensions. With noise it will be two or six extensions.

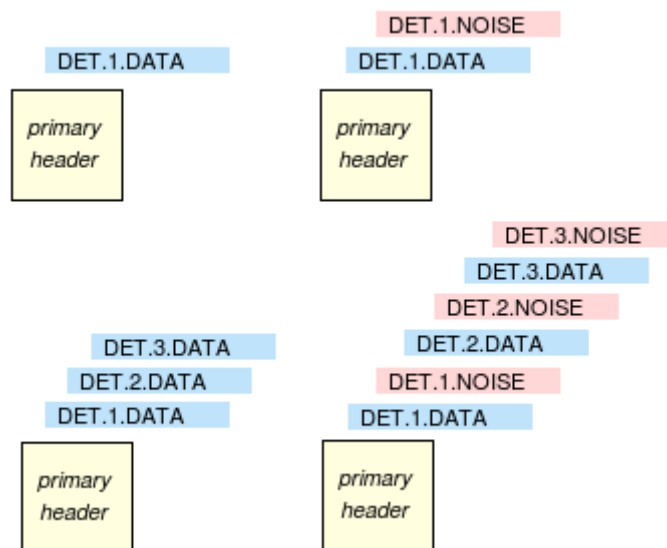

**Figure 11** The valid configurations of F1D-frames either with or without noise maps.

### 4.2.3 Detector based binary digit products


File Type: B2D

PCTAG: BADPIXEL\_DARK, BADPIXEL\_FLAT

These files also have the detector as the reference frame in which the data are stored, in fact they are almost identical to F2D frames. But the data stored has another meaning: i.e. '0' stands for a bad pixel, '1' for a good pixel. The FITS files will have extensions corresponding to the 3 detectors (like in Figure 10 on the left side). A B2D frame can't contain any noise frames.

Note that although a list of bad pixels would require less file space, it requires additional processing and does not allow for an easy way to visually check the bad pixel map.

To distinguish F2D from B2D frames the EXTNAME keyword contains DET.1.BADPIX, DET.2.BADPIX and DET.3.BADPIX.



**Figure 12** The valid configuration of a B2D-frame either with or without noise maps.


### 4.2.4 1-dimensional IFU based products

File Type: F1I

PCTAG: TELLURIC, STAR\_SPEC

The IFU spectral domain is the reference for the storage of these data – i.e. the data is a simple spectrum, the length and sampling of which correspond exactly to those of the spectral axis of a reconstructed cube. The same telluric correction will be used for all IFUs, and so the only extension in the FITS file will correspond to the noise spectrum. A F1I-frame can either contain

the spectrum of just one IFU or of up to 24 IFUs. For inactive IFUs (for which hence no data exists) an empty extension is inserted for data as well for the noise map.

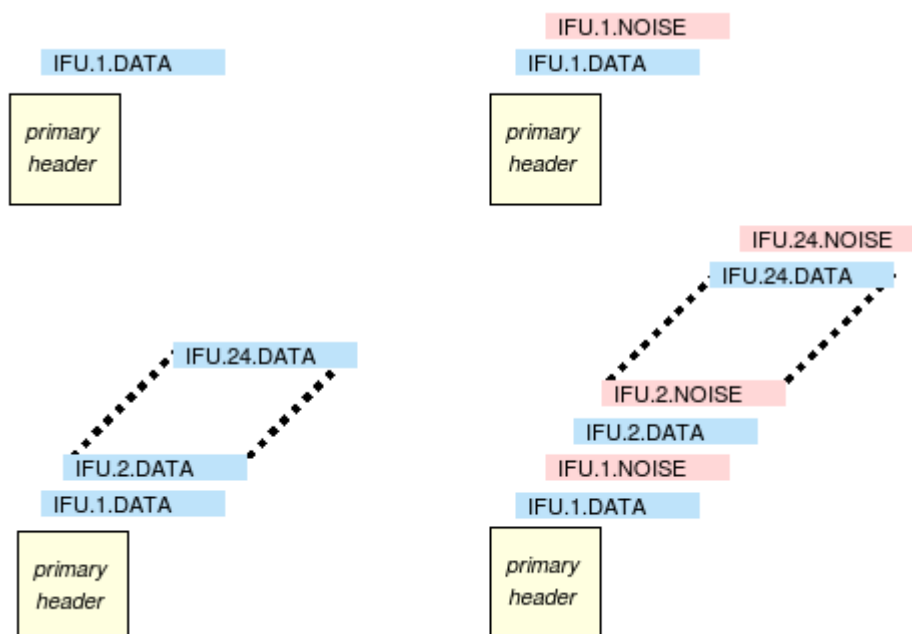


**Figure 13** All valid configurations of a F1I-frame either with or without noise maps. The value for the EXTNAME keyword can be seen in the blue and red rectangles.

#### **4.2.5 2-dimensional IFU based products**

File Type: F2I

PCTAG: ILLUM\_CORR, STD\_IMAGE

The IFU spatial field is the reference for the storage of these data (i.e.  $14 \times 14$  pixels) – i.e. the data correspond to a cube which is collapsed along the spectral axis. Since KMOS has 24 IFUs, the data will be stored in up to 24 extensions or in 48 extensions with noise maps in a single FITS file. All extensions will be presenting every file produced; those for which no data exist will be left empty. A F2I-frame can either contain images of just one IFU or of up to 24 IFUs.

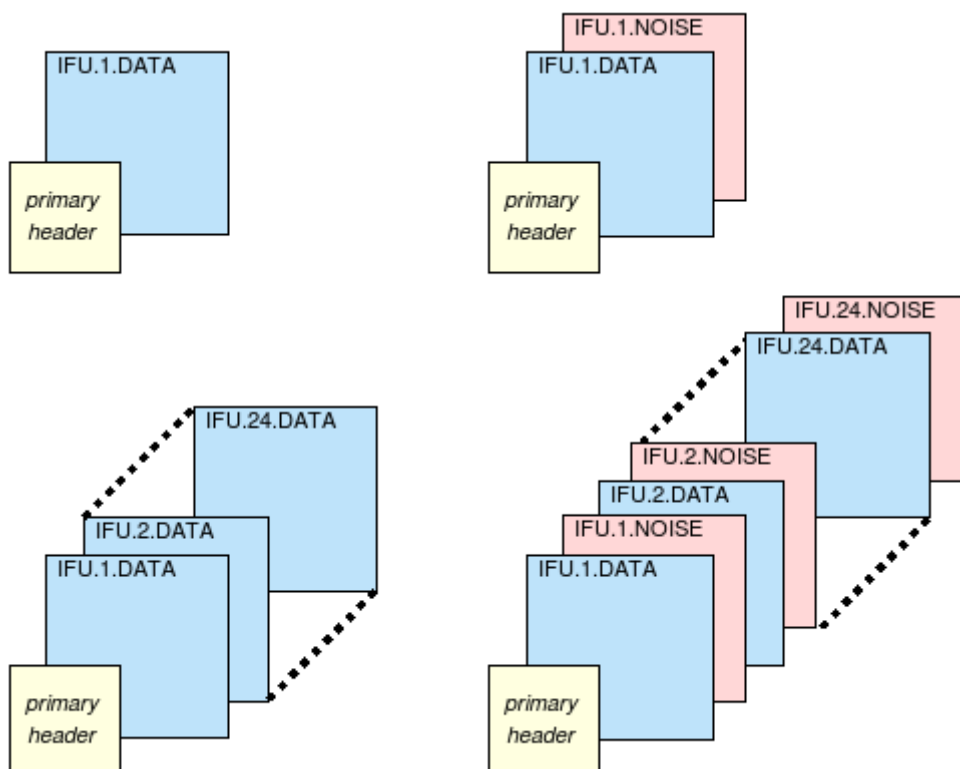

**Figure 14** All valid configurations of a F2I-frame either with or without noise maps.

#### 4.2.6 Naming convention

For all intermediate data formats described in section 4.2 (and also for F3I in section 4.4.1) the convention is followed that in all extensions the EXTNAME keyword is describing its origin and content. The format is "**TYPE.NR.CONTENT**",  
where TYPE can be DET or IFU,  
where NR can be a number between 1 to 24 and  
where CONTENT can be DATA, NOISE or BADPIX.

This convention is modified when cubes are combined using the recipe `kmo_combine`. Since the cubes to be combined needn't to stem from the same IFU (for example an object is observed in the first OB on IFU #2 and in the second OB on IFU #13), the format will be changed to "**TYPE.CONTENT**". The user will have to keep track himself of the history of the IFUs if he desires so. `kmo_combine` will take the header of the first fits file in the sof-file and modify it accordingly.

### 4.3 External Data Formats

All files have an empty primary header, data and noise is stored in extensions as described below.

#### 4.3.1 Lists

File Type: F1L

PCTAG: ARC\_LIST

These file types will be stored as a binary fits table. The EXTNAME keyword contains the string "LIST".

The line list will have three columns: the first column will contain a list of wavelengths corresponding to the positions of the lines; the second column will contain a corresponding list of approximate line strengths. The third column contains a string, either “Ar” or “Ne” depending to which gas the line belongs to. With this information, it will be possible both to generate a spectrum at the appropriate resolution to match that of the bandpass and also to unambiguously identify particular lines in an observed spectrum. Note that because two different arc lamps are used, there is uncertainty in the relative strengths of the lines between these two lamps. Therefore the arc line strengths will not be used by the automatic pipeline. However, the information will be retained in the data file for the astronomer and possible future upgrades or other unforeseen uses.

### **4.3.2 1-dimensional spectra**

File Type: F1S

PCATG: ATMOS\_MODEL, SOLAR\_SPEC, OH\_LIST

These data formats will be stored as linearly sampled spectra, with the standard parameters defining the wavelength sampling given in the header. These spectra are at very high resolution and cover the entire wavelength range of all the bandpasses used within KMOS. When needed, the appropriate section of the spectrum can be convolved to the required resolution. The structure of a F1S file follows the definition of a F1I file, except that there can only be one data extension without noise and the EXTNAME keyword contains the string “SPEC”.

### **4.3.3 Lookup tables**

File Type: F2L

PCATG: SPEC\_TYPE\_LOOKUP, FLAT\_EDGE, REF\_LINES

A lookup table is by definition 2-dimensional. Therefore this data format will consist of a binary fits table with an appropriate number of rows and columns. The EXTNAME keyword contains the string “LIST”.

In the case of SPEC\_TYPE\_LOOKUP, the aim is to cover the most common MK spectral types so that the effective temperature of any telluric star (typically a B or G2V star) can be estimated:

luminosity classes: I, II, III, IV, V

spectral type: O5, O9, B0, B2, B5, B8, A0, A2, A5, F0, F2, F5, F8, G0, G2, G5, G8

This file type can either have one or 24 extensions.


## **4.4 Final Output Data Formats**

### **4.4.1 3-dimensional IFU based products**

File Type: F3I

PCATG: CUBE\_DARK, CUBE\_FLAT, CUBE\_ARC, CUBE\_OBJECT, CUBE\_STD, REDUCED\_CUBE

The processed datacubes (i.e. 14×14×2048 pixels), one corresponding to each of the 24 IFUs is stored in a F3I fits file. As the other formats described above, F3I has as well an empty primary header and data and noise maps are stored alternately. Extensions for inactive IFUs are left empty.

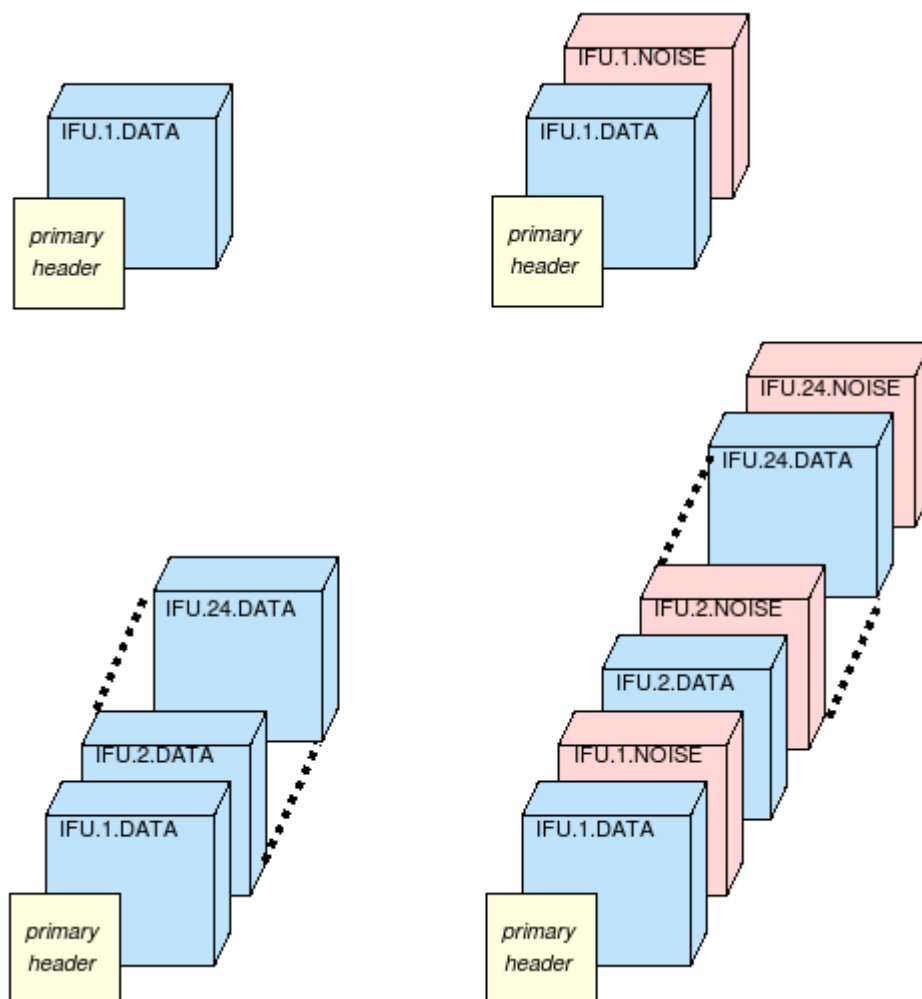


**Figure 15** All valid configurations of a F3I-frame either with or without noise maps.

## 4.5 Calibration Data Formats


Since the orientation of all IFUs isn't the same due to the optical path of the KMOS instrument the spatial solution lookup frames XCAL and YCAL (see section 4.1) are intermixed. The assembly of the RAW frames in respect to the IFUs is explained in section 3.1 in detail.

Following figures show the setup of the three calibration frames XCAL, YCAL and LCAL:




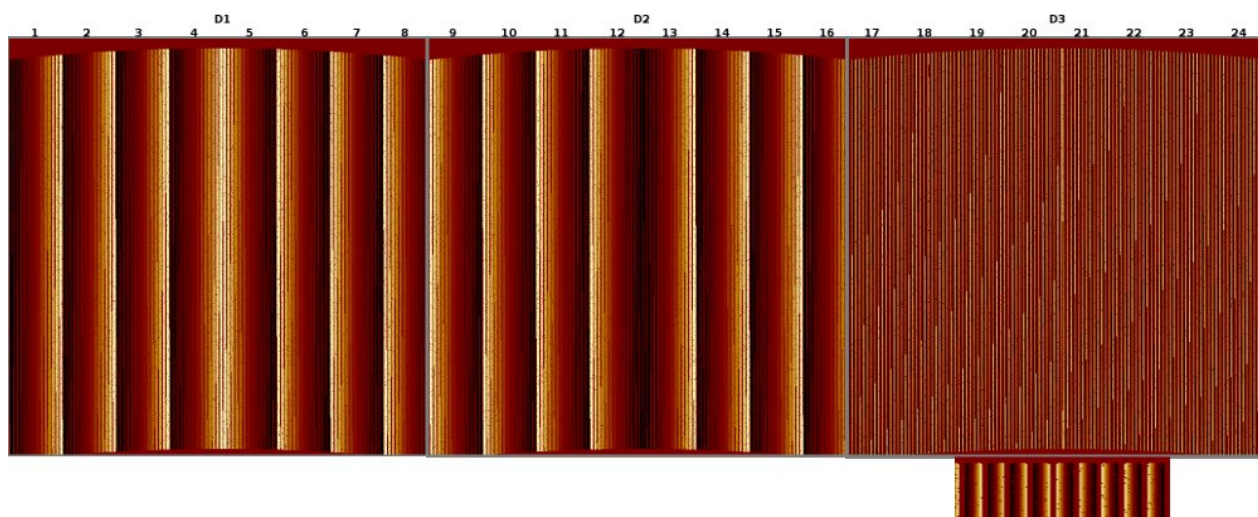

**Figure 16 XCAL:** In the first two detector frames there is the same data value inside each slitlet. So the visible gradient extends over the whole IFU. In the third detector frame the extends over each slitlet individually (see magnification)

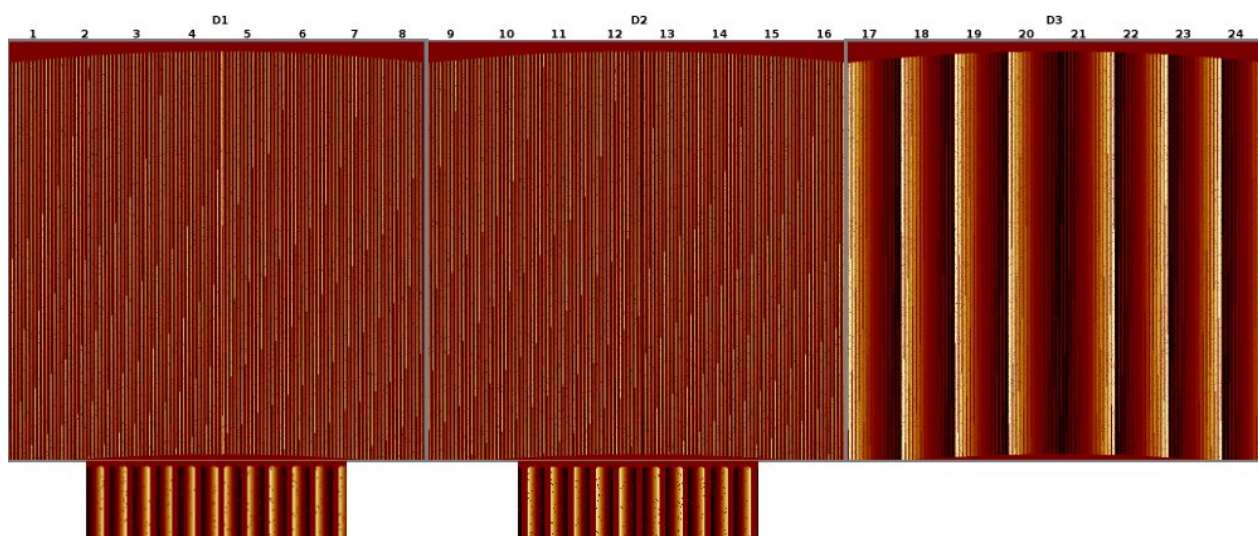

**Figure 17 YCAL:** The same pattern as above is observed but just switched between the detectors.

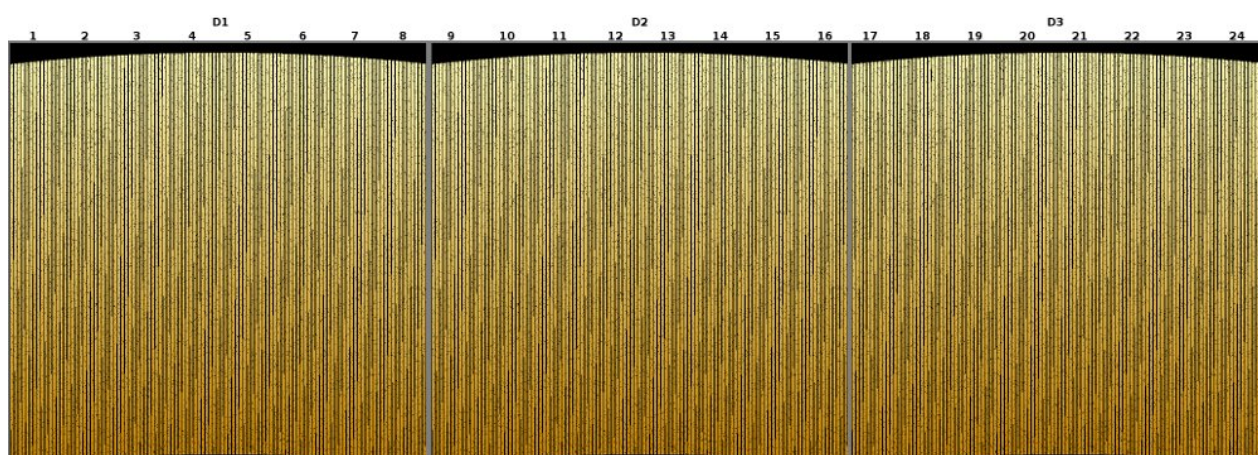

**Figure 18 LCAL:** The gradient extends over the wavelength axis in the same way for all detectors, IFUs and slitlets.

### 4.5.1 Calibration at multiple rotator angles

Calibrations should as well compensate as much as possible for the flexure. There are two main sources of flexure. On one hand the flexure of the whole instrument as such and on the other hand the flexure introduced inside the instrument (spectrographs, arms etc.).

Compensating the outer flexure hasn't been solved satisfactory until now since the characteristics are quite unpredictable. The flexure results in offset of about 1 pix, which lie in the specifications of the instrument.

To compensate for the inner flexure the KMOS DRS pipeline allows to take calibration exposures at several rotator angles and to process them in a single run of the associated recipes. The recipes applying reconstruction will then choose the closest calibration frames regarding the rotator angle of the input science frame to reconstruct. If the angle lies inbetween two calibrations, the calibration frames will be temporarily interpolated.

The calibration frames XCAL, YCAL and LCAL generated with the recipes `kmo_flat` and `kmo_wave_cal` therefore don't just contain 3 extensions each, but rather 3 times the number of rotator angles.

A default value of 6 rotator angles at an increment step of  $60^\circ$  has proved to be sufficient.


## 4.6 RTD Data Formats

Data which will be displayed in the RTD does not have a designated type since it is not archived, nor does it play a role in the pipeline processing of the science OBs. The formats are included here for completeness and to clarify how the data will appear in the RTD.

There will be 2 RTDs for KMOS.


The first will display the raw data, which will appear as a single frame, from which the contributions from the 3 detectors (each  $2048 \times 2048$  pixels) are spliced together in a row, making a frame of  $6144 \times 2048$  pixels as shown in Figure 19.



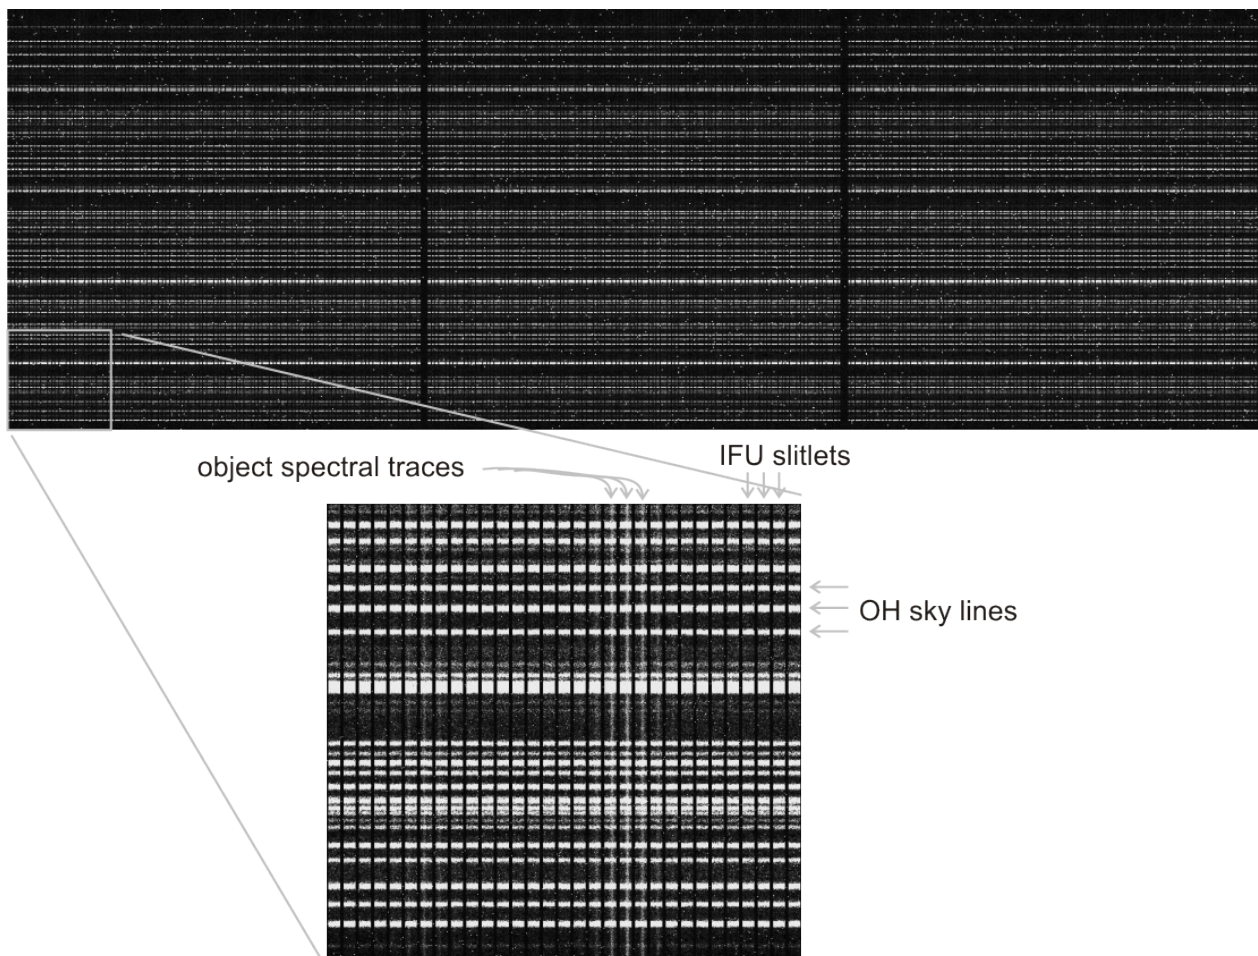

**Figure 19:** illustrative example of how the raw data appears in the first RTD (top), with the 3 detector frames spliced together. Below is shown a zoom of one part of this, in which it is possible to distinguish individual slitlets from the IFUs, the OH lines, and the spectral traces of 1 or 2 objects. Note that no curvature has been included in this example; the actual curvature will be small.


The second RTD shows the reconstructed images. There is a button so that the user can choose between seeing these images in a grid (Figure 20) or in their actual location within the patrol field (Figure 21).

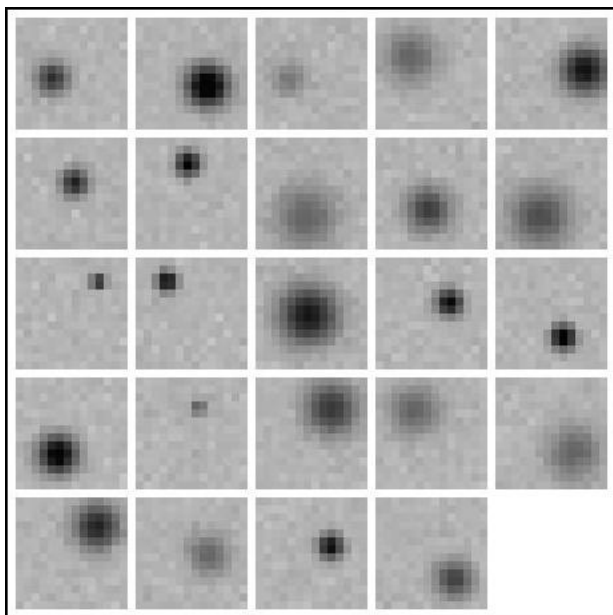

**Figure 20:** reconstructed images from the 24 IFUs displayed in a 5×5 grid format. This allows one to see immediately and easily what each IFU is looking at.

Each sub-image of the grid-format will be 14×14 pixels. Since a spacing of 1 pixel is included between each sub-image, the whole montage will be 76×76 pixels. Any sub-images which are not reconstructed (e.g. during acquisition, typically only a few IFUs will be used) will be left blank. Thus the position of a sub-image for a particular IFU will *always* be the same, regardless of how many are reconstructed.

The patrol field format will cover 7.2arcmin (plus some extra blank space) at a sampling of 0.2'' which matches that of the individual reconstructed images. Thus it will be 2200×2200 pixels. The sub-images will be inserted at the nearest integer position to their actual locations. This is done to avoid the necessity of resampling the reconstructed images, and because this accuracy (i.e. to half a pixel, or 0.1'') is sufficient for the purpose of this format.

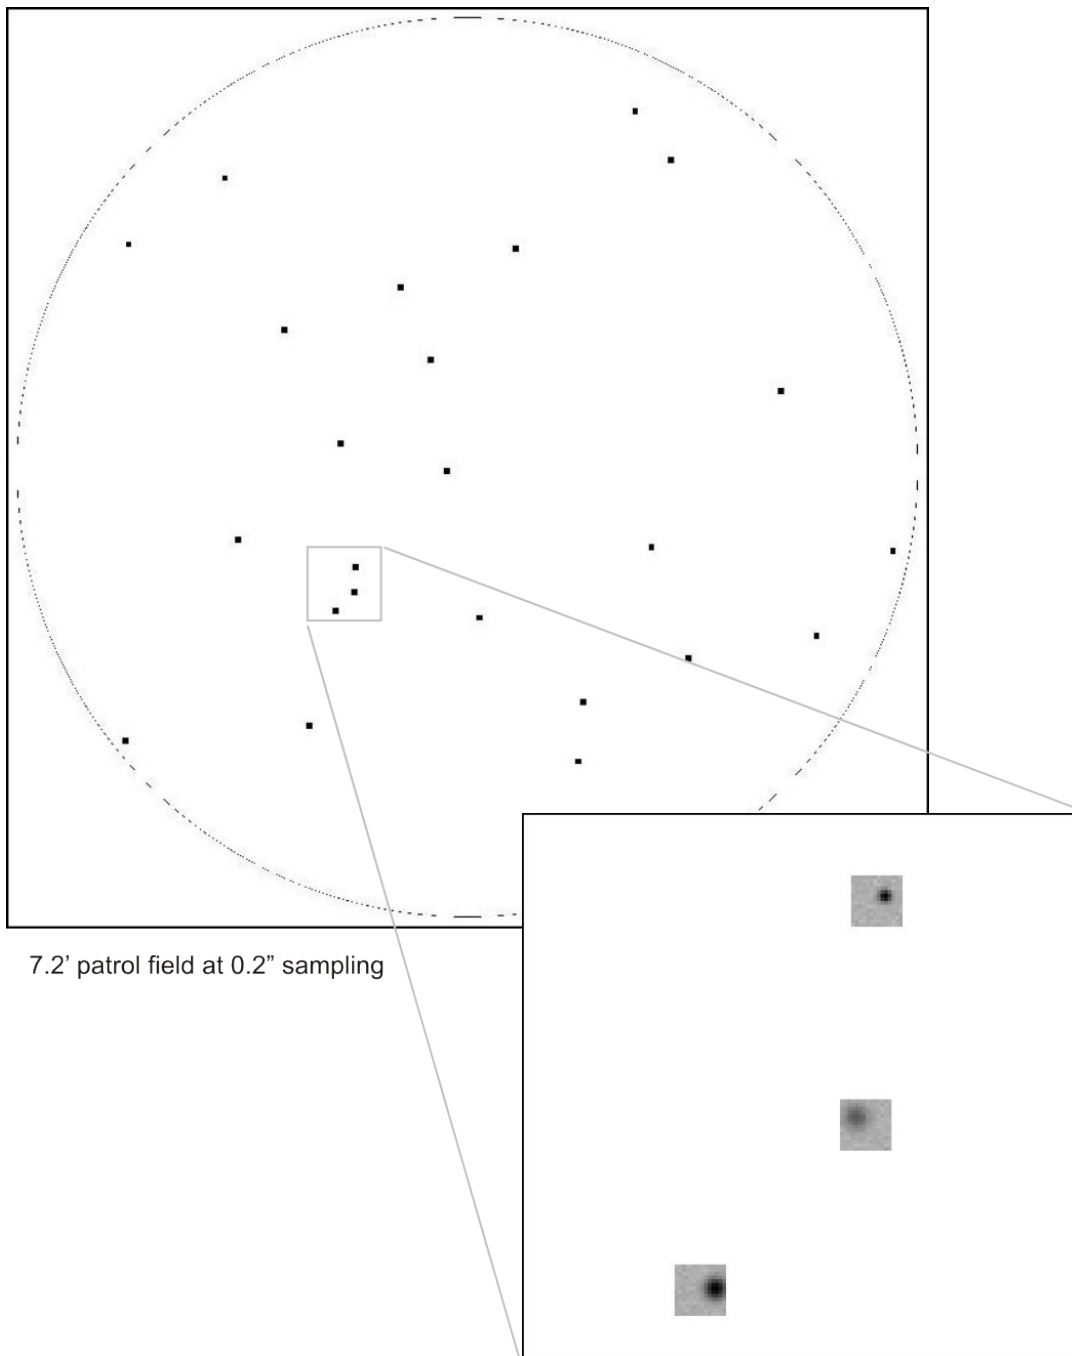

**Figure 21:** reconstructed images from the 24 IFUs placed in their actual locations within the patrol field. This mode will mostly be used for testing and commissioning KMOS, but may also be useful during certain astronomical acquisitions and observations.

## 5 **Data Reduction Library QC1 Parameters**

KMOS has 24 IFUs, each of which has 14 slitlets, giving a total of 336 distinct 2-dimensional spectra. Due to alignment and manufacturing tolerances, the spectral traces and dispersion solutions of these spectra need to be determined independently (e.g. there could be discrete shifts between neighbouring spectra). Furthermore, these parameters will depend on the bandpass used. As a result monitoring all the coefficients of all the fits would yield many thousands of QC1 parameters – which is clearly impractical.

This section concerns the way in which the number of QC1 parameters will be kept to a manageable total. However, it should be realised that in many cases, it is nevertheless necessary to track QC1 parameters separately for

- (a) each of the 3 detectors since these correspond, in effect, to optically separate systems.
- (b) each of the 5 bandpasses, since many of the optical properties depend on the grating/filter used.

Information about the detector or grating to which each QC1 parameter is associated will be given in the associated PAF.

A concise summary of all the QC1 parameters is given in Appendix B.

### 5.1 **QC1 Parameter descriptions**

#### 5.1.1 **Dark Frames**

QC DARK

Direct calculation of the mean value in the Master Dark frame for each detector.  
(Stored in each detector header of all created output frames)

QC DARK MEDIAN

Direct calculation of the median value in the Master Dark frame for each detector.  
(Stored in each detector header of all created output frames)

QC RON

Direct calculation of the mean value of the noise of the Master Dark frame for each detector.  
(Stored in each detector header of all created output frames)

QC RON MEDIAN

Direct calculation of the median value of the noise of the Master Dark frame for each detector.  
(Stored in each detector header of all created output frames)

QC DARKCUR

Mean value (with iterative rejection) for each detector of a long exposure Master Dark frame, after the Master Dark has been subtracted, divided by the exposure time.  
(Stored in each detector header of all created output frames)

QC BADPIX NCOUNTS

Total number of pixels in each detector flagged as ‘bad’ in a Master Dark or Master Dark frame. The minimum number is 32’704, since the four-pixel border around the detector frame (used to monitor detector health) is marked always as bad.  
(Stored in each detector headers of all created output frames)

### **5.1.2 Flat Frames**

QC FLAT EFF

The main concern here is whether the brightness of the flatfield lamps has changed, and so a single value suffices for all detectors together. It is defined as the mean normalisation for the Master Flat divided by the exposure time, for each bandpass.  
(Stored in the primary headers of all created output frames)

QC FLAT SAT NCOUNTS

This parameter tracks how many of the 12 million pixels (in all three detectors) are saturated in the Master Flat, for each bandpass. It allows one to set the optimal exposure time (DIT). A pixel is flagged as saturated if its value is above some defined limit in at least two of the individual ON frames used to generate the Master Flat.  
(Stored in the primary headers of all created output frames)

QC FLAT SN

This parameter tracks the signal-to-noise in the illuminated regions of the Master Flat, for each bandpass. It is defined as the total signal in these regions divided by the total noise (i.e. every illuminated pixel is given equal weighting). This will allow one to monitor whether the signal-to-noise in the flatfield meets the required specification, and adjust the number of co-adds (NDIT) appropriately.  
(Stored in the primary headers of all created output frames)

QC GAP MEAN, QC GAP SDV, QC GAP MAXDEV  
QC SLIT MEAN, QC SLIT SDV, QC SLIT MAXDEV

For all detected edges the width of gaps and slitlets are determined using the fitted polynomial functions. Deviant values are rejected. Then the mean, standard deviation and maximum deviation (in units of standard deviation) are calculated and Y will be compared to nominal values stored in external files (see Section 4 lower table and Section 4.3 for the data format), which will be determined during testing and updated during commissioning. This will yield two sets of numbers which ideally would have a small scatter about zero.

These 6 parameters are sufficient to monitor changes in spectral curvature solution for each of the detectors and bandpasses.

(Stored in each detector header of all created output frames)

### **5.1.3 Wavelength Calibration**

QC ARC AR EFF,  
QC ARC NE EFF

The main concern here is whether the brightness of the argon and neon arc lamps has changed, and so a single value for each lamp suffices for all detectors together. They are defined as the total counts of several specified lines, divided by the exposure time, for each bandpass.  
(Stored in the primary header)

QC ARC SAT NCOUNTS

This parameter tracks how many of the 12 million pixels (in all three detectors) are saturated in the arc frame, for each bandpass. It allows one to set the optimal exposure time (DIT). A pixel is

flagged as saturated if its value is above some defined limit in at least two of the individual ON frames used to generate the arc frame.

(Stored in the primary header)

```
QC ARC AR SPECRES, QC ARC AR ERR SPECRES,  
QC ARC NE SPECRES, QC ARC NE ERR SPECRES
```

This monitors the spectral resolution and its errors of each grating for both the argon and neon lamp. The FWHM of a specified arc line is measured for each bandpass and each detector.

(Stored in each detector header)

```
QC ARC DISP0 MEAN, QC ARC DISP0 SDV, QC ARC DISP0 MAXDEV,  
QC ARC DISP1 MEAN, QC ARC DISP1 SDV, QC ARC DISP1 MAXDEV,  
QC ARC DISP2 MEAN, QC ARC DISP2 SDV, QC ARC DISP2 MAXDEV
```

For each slitlet, a set of coefficients relating the pixel position on the detector to its wavelength is determined. The constant (zeroth order), first order, and second order coefficients in Y will be compared to nominal values stored in external files (see Section 4 lower table and Section 4.3 for the data format), which will be determined during testing and updated during commissioning. This will yield three sets of numbers which ideally would have a small scatter about zero.

These 9 parameters are sufficient to monitor changes in dispersion solution for each of the detectors and bandpasses.

(Stored in each detector header)

```
QC ARC MAX DIFF, QC ARC MAX DIFF ID,  
QC ARC MAX SDV, QC ARC MAX SDV ID,  
QC ARC MEAN DIFF,  
QC ARC MEAN SDV
```

Once the wavelength calibration look-up table has been generated, the arc frame is reconstructed into a cube. Several prominent arc lines will be used to check the quality of the wavelength calibration. For each IFU the difference between the wavelength of the emission line (across all spaxels) and its true wavelength will be measured. The maximum difference, and the corresponding IFU identity will be written as QC parameters. Similarly, the standard deviation of the wavelengths in each spaxel will be calculated. The maximum value and the identity of the corresponding IFU will be written to a second pair of QC parameters.

These 4 parameters are sufficient to monitor the quality of the dispersion solution for each of the detectors and bandpasses. Similarly, the mean difference and the mean standard deviation are calculated.

(Stored in each detector header)

## 5.1.4 Illumination Correction

```
QC SPAT UNIF
```

This parameter is defined as the RMS of all 14×14 spatial pixels in all the illumination correction images corresponding to the 24 IFUs. It is a simple measure of how uniform the Master Flat is, for each bandpass. It is also sensitive to differences in throughput (e.g. due to vignetting) both between IFUs, and within any individual IFU.

(Stored in the primary header of the created output frame)

```
QC SPAT MAX DEV,  
QC SPAT MAX DEV ID
```



For these parameters, the mean of the illumination correction is calculated for each of the IFUs in each bandpass. The IFU that deviates most from unity is flagged, as is the amount by which it deviates.

(Stored in the primary header of the created output frame)

QC SPAT MAX NONUNIF,  
 QC SPAT MAX NONUNIF ID

For these parameters, the standard deviation of the illumination correction is calculated for each of the IFUs in each bandpass. The IFU with the largest standard deviation is flagged, and the standard deviation itself is also recorded.

(Stored in the primary header of the created output frame)

## 5.1.5 Standard Star Observations

QC ZPOINT

This is defined as the mean zeropoint of all standard stars observed in various IFUs for a single pointing, and for which a magnitude is given (although the number of stars may typically be 1). It is different for each bandpass.

(Stored in each detector header of telluric output frame)

QC THRUPUT, QC THRUPUT MEAN, QC THRUPUT SDV

This is equivalent to the zeropoint, but in a slightly different form. The throughput will be calculated whenever the zeropoint is calculated. It will be given as the mean (and standard deviation) of the throughput based on all standard stars observed in various IFUs for a single pointing – as long as a magnitude and spectral type is given. The number of photons detected (i.e. counts  $\times$  gain) will be compared to the number of photons expected from the star, taking into account standard atmospheric extinction. The ratio of these numbers is the throughput from the top of the telescope to the detector, including the detector quantum efficiency.

(QC THROUGHPUT is stored in each detector header of telluric output frame,

QC THROUGHPUT MEAN and QC THROUGHPUT SDV are stored in the primary header of telluric output frame)

QC SPAT RES

This is defined as the mean FWHM resolution of all standard stars observed in a single pointing. Although the PSF may be slightly elliptical, the FWHM along the two axes are averaged to yield a single measurement.

(Stored in each detector header of PSF output frame)

QC STD TRACE

This QC1 parameter has been introduced to verify the spectral curvature solution by checking whether the trace of a standard star is straight in the reconstructed cube. Note that in the near infrared, differential atmospheric refraction is small and will have little impact on the trace. This parameter measures the standard deviation of the measurements of the positions of the standard star in each spectral slice. This will depend on the bandpass used.

(Stored in each detector header of PSF output frame)

## **PART II: DRS RECIPE REFERENCE**

### **6 Preliminaries**

All calibration and science recipes receive raw or processed frames as input containing data referring to a complete detector array. While processing, this format can change in the way that a frame will refer to a single IFU (see Sec. 4.2.4 onwards). In this case the recipe iterates over all frames of all IFUs in order to process all data supplied by the detectors. Detector frames will be split up into IFU frames, when a cube has to be reconstructed or created. Cubes refer always to IFUs. Reciprocally IFU frames can be combined to a detector frame again.

#### **Data Types**

All generated and saved image and cube frames are of type float. Vector frames and scalar values are of type double.

#### **Addressing of IFUs and detectors**

When a specific IFU or detector has to be defined in a recipe, an integer has to be supplied to the recipe. Numbering starts always at 1 and ends at 24 for IFUs and at 3 for detectors.

#### **Invalid IFUs**

Since not all IFUs need to be active when doing an exposure, some sections of a RAW frame can contain invalid data. The inactive IFUs are marked in the primary header with ESO OCS ARMi NOTUSED (i=1 to 24).

During reconstruction the detector frame is split up and rearranged into a cube. Invalid IFUs will just contain the extension header and no data (NAXIS=0). The keywords specific to arms are propagated into the respective extension header.

#### **QC Parameters**

The QC parameters generated by the recipes are listed in Appendix B.

### **6.1 Standard workflow**

A standard workflow to setup a calibration pipeline would look like:

```
$ esorex kmo_dark dark.sof
$ esorex kmo_flat flat.sof
$ esorex kmo_wave_cal arc.sof
$ esorex kmo_illumination illumination.sof
$ esorex kmo_std_star std_star.sof
$ esorex kmo_sci_red sci_red.sof
```

Reconstructing a data cube from a detector image can already be performed after having executed `kmo_wave_cal`:

```
$ esorex kmo_reconstruct reconstruct_science.sof
```

### **6.2 Generating Test Data**

Executing the built-in tests of the pipeline generates automatically valid and invalid test data for the various recipes. Valid data has a prefix “v\_” and invalid data has a prefix “i\_” (stored in the subfolders in `kmosp/recipes/tests/test_data`).

Test data is also generated for the calibration pipeline (kmosp/recipes/tests/test\_data/pipeline). It consists of simulated K-band data. The pipeline will also be executed during the tests and the products are saved to disk (kmosp/recipes/tests).

To run the tests open a terminal and execute `make check` in kmosp/recipes.

## 6.3 Predefined wavelength ranges

By default the following wavelength ranges are used to reconstruct detector images into cubes:

H-band:	1.425 - 1.867 um
HK-band:	1.460 - 2.410 um
IZ-band:	0.780 - 1.090 um
K-band:	1.925 - 2.500 um
YJ-band:	1.000 - 1.359 um

These values can be changed using the parameters `b_end` and `b_start` in the recipes `kmo_reconstruct`, `kmo_illumination`, `kmo_std_star`, `kmo_sci_red` and `kmo_multi_reconstruct`.

## 6.4 Lookup table (LUT) for reconstruction

Once the calibration frames XCAL, YCAL and LCAL have been created with `kmo_flat` and `kmo_wave_cal`, any detector image can be reconstructed. As long as the calibration frames don't change, every detector image will be reconstructed exactly the same way. To speed up the interpolation during reconstruction, the generated LUT will be saved to disk by default. In each subsequent reconstruction step this LUT can be reused and hasn't to be recalculated therefore. The LUT is saved as binary file and is not editable. It will neither be declared as ESO DFS product since this is an intermediate output.

When a detector image to reconstruct contains only a few valid IFUs, the LUT is only calculated and stored for these IFUs. In a later run the LUT can be updated when other IFUs are active.

A saved LUT can only be reused when following parameters match

- **filters, gratings and rotation offset**  
 Every LUT is specific to filters, gratings and rotation offset. Therefore the LUT gets the same filename extension like other calibration products, e.g. `LUT_HHH_HHH_0.fits`
- **reconstruction method, spatial and spectral ranges**  
 These parameters are stored in the LUT and are checked before eventually applying it.
- **timestamp**  
 A timestamp is also added to the LUT to assert that the LUT is newer than the above-mentioned calibration frames. If any of the provided calibration frames is newer than the LUT, then the LUT will be recalculated.

The LUT will be erased, recalculated and saved again when any of these parameters don't match.

There are different modes to influence the behaviour of the usage of the LUT.

- **NONE**  
 The initial LUT is neither stored to disk nor in memory.

This method uses CPU resources only and is therefore the slowest method.  
Any possibly existing LUT on disk will be ignored.

- **MEMORY**

The initial LUT isn't stored to disk but is kept in memory as long a recipe is executed.  
This method uses system memory resources.  
Any possibly existing LUT on disk will be ignored.

- **FILE**

The initial LUT will be calculated and directly be saved to disk.  
This method uses file system resources.  
Any possibly existing LUT on disk will be examined for usability.

- **BOTH**

The initial LUT will be kept in memory as long a recipe is executed and saved to disk.  
This method uses system memory and file system resources.  
Any possibly existing LUT on disk will be examined for usability.

The default is `LUT_MODE_FILE`. The behavior can be changed in defining an environment variable called `KMCLIPM_PRIV_RECONSTRUCT_LUT_MODE` with any of the the values declared above.

## 7 **Recipes**

The KMOS data processing recipes can be divided into following three categories:

- **Calibration Recipes**  
 Recipes, which directly produce either calibration frames needed for science reductions or for QC1 parameters.
- **Science Reduction Recipes**  
 Recipes which perform science or acquisition reductions (which are largely built from the tools described below)
- **Common Recipes**  
 Functionally simple recipes, which can be applied in a straightforward fashion. These recipes are used internally as well for the calibration and science reduction recipes.

The interactions between the calibration and science reduction recipes are displayed as an association map in Figure 22.


It is worth noting that only the high level functions are described here, and the low level such as basic arithmetic and file manipulation functions, are implied.

In Section 7.1 and 7.2 the calibration and science processing recipes are ordered following the workflow of the pipeline. In the following section the recipes are ordered alphabetically.

### **Reference Structure**

For each recipe following information is provided:

- **Functional Description**  
 A short and more detailed description of the recipe is given.
- **Flow Chart**  
 A graphical flow chart and a corresponding description are provided. The stylistic conventions used in the subsequent flowcharts are as follows:
  - Inputs of single values like float, int etc. external to the recipe data flow are indicated in the flowchart by right filled triangles (►).
  - Inputs of cubes, frames or vectors are indicated by arrows (→).
  - Output of quality control parameters is coloured blue.
  - Data-cubes, -frames or -vectors are displayed with bold typeface.
  - The data flow goes from top to bottom. The down arrows can be split by conditional statements (diamond) or when one single output triggers several DRL functions.
- **Input Frames**  
 The DO categories of the frames needed to run the recipe and the required KMOS Fits Type.
- **Fits Header Keywords**  
 Keywords needed in the primary and subsequent headers of the input files.
- **Configuration Parameters**  
 Description of all possible parameters with applicable data formats and allowed values. Where appropriate they are divided into basic and Advanced parameters.
- **Output Frames**  
 Created output files with their DO category and KMOS Fits Type.
- **Examples**  
 How one would call the recipe with Esorex. If input is a single fits-file with no category-keyword, it can simply be appended to the recipe-name. If input consists of a file with category-keyword or of multiple files, they have to be written in a so-called sof-file (set of frames). These are pseudo code examples.

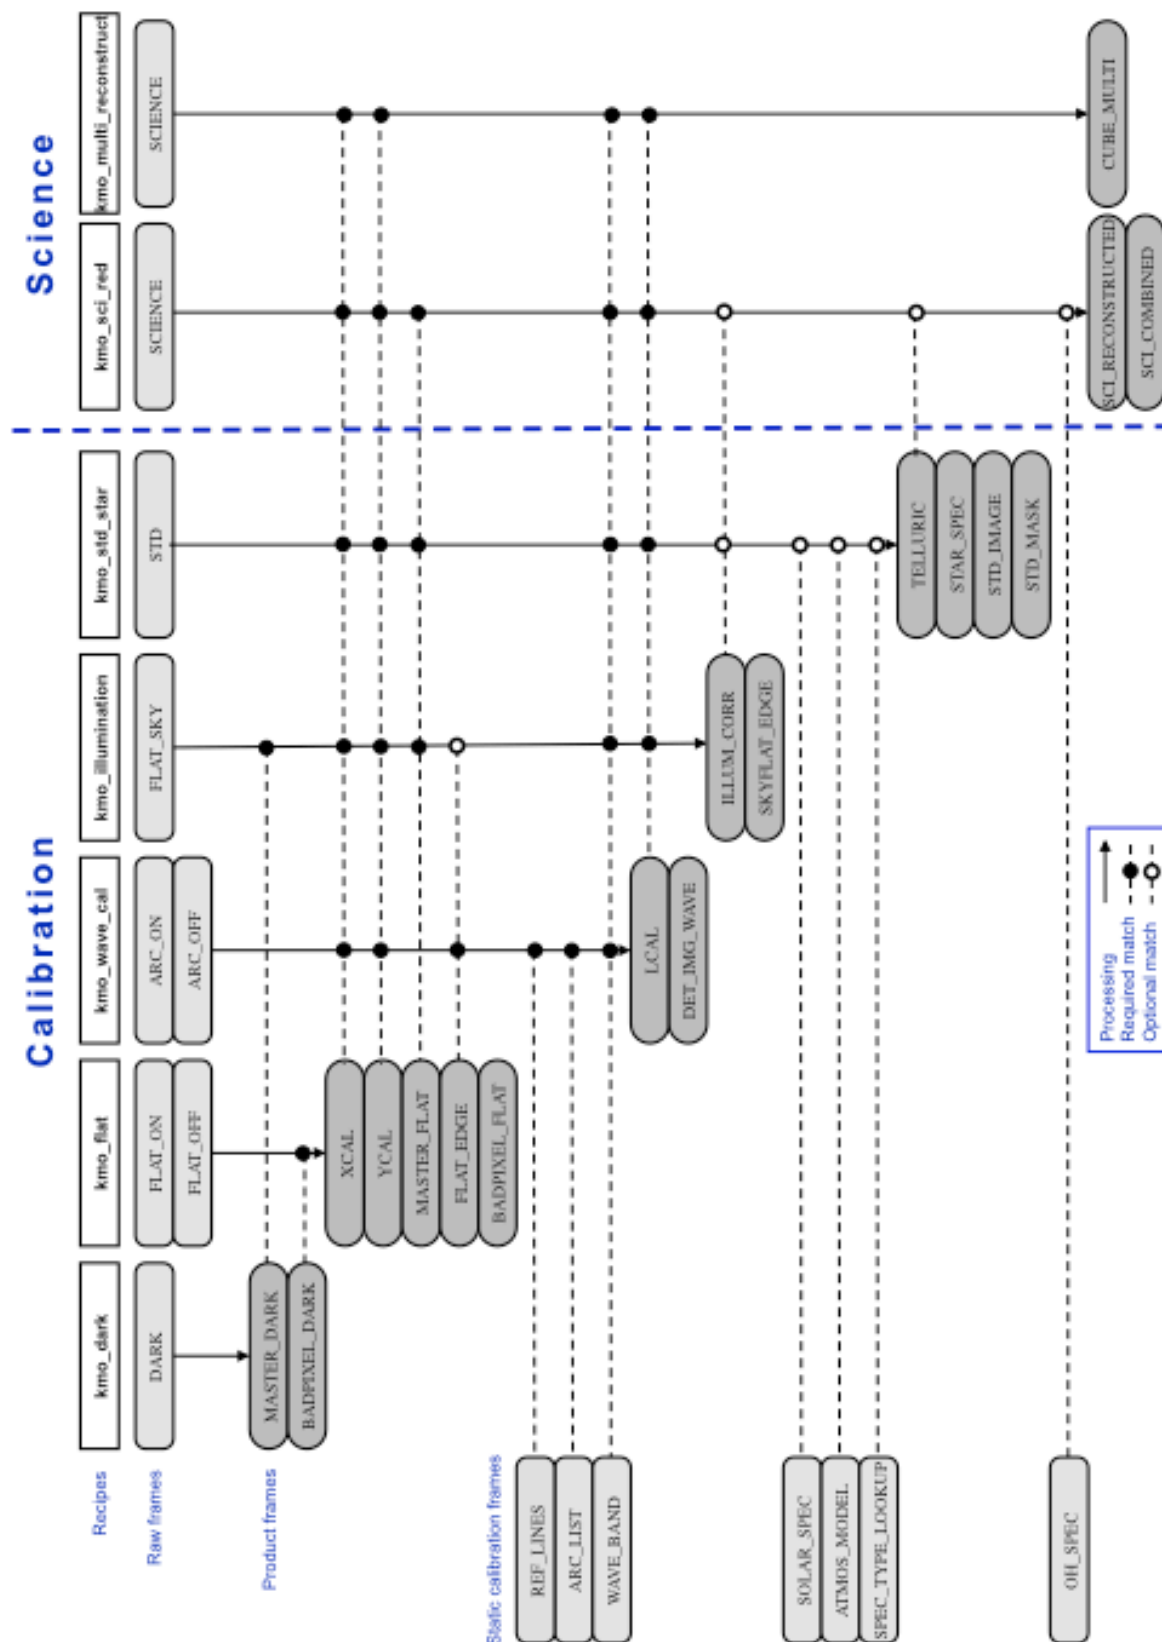

**Figure 22:** Association map for KMOS. The calibration and science recipes are listed, and the interactions between them indicated by the filled circles.

## 7.1 Calibration Recipes

### 7.1.1 **kmo\_dark:** **Master Dark Frames**

Recipe name	used in recipe/function	uses recipe/function
kmo_dark	-	kmclipm_combine_frames

Create master dark frame & bad pixel mask (for monitoring detector health) and derive mean dark current.

#### 7.1.1.1 Description

This recipe calculates the master dark frame.

It is recommended to provide three or more dark exposures to produce a reasonable master with associated noise. See section 8.2 for information on combine less than three frames.

##### Basic parameters:

```
--pos_bad_pix_rej
--neg_bad_pix_rej
```

Bad pixels above and below defined positive/negative threshold levels will be flagged and output to the BADPIX\_DARK frame (which will go into the **kmo\_flat** recipe). The number of bad pixels is returned as a QC1 parameter. The two parameters can be used to change these thresholds.

```
--cmethod
```

Following methods of frame combination are available:

- **ksigma (default)**  
An iterative sigma clipping. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:  

$$val > mean + stdev * cpos\_rej$$
and  

$$val < mean - stdev * cneg\_rej$$
where `--cpos_rej`, `--cneg_rej` and `--citer` are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2)
- **median**  
At each pixel position the median is calculated.
- **average**  
At each pixel position the average is calculated.
- **sum**  
At each pixel position the sum is calculated.
- **min\_max**  
The specified number of minimum and maximum pixel values will be rejected.  
`--cmax` and `--cmin` apply to this method.

```
--file_extension
```


Set this parameter to TRUE if the EXPTIME keyword should be appended to the output filenames.

### Advanced parameters:

```
--cpos_rej
--cneg_rej
--citer
see --cmethod = "ksigma"

--cmax
--cmin
see --cmethod = "min_max"
```

### 7.1.1.2 Flow Chart

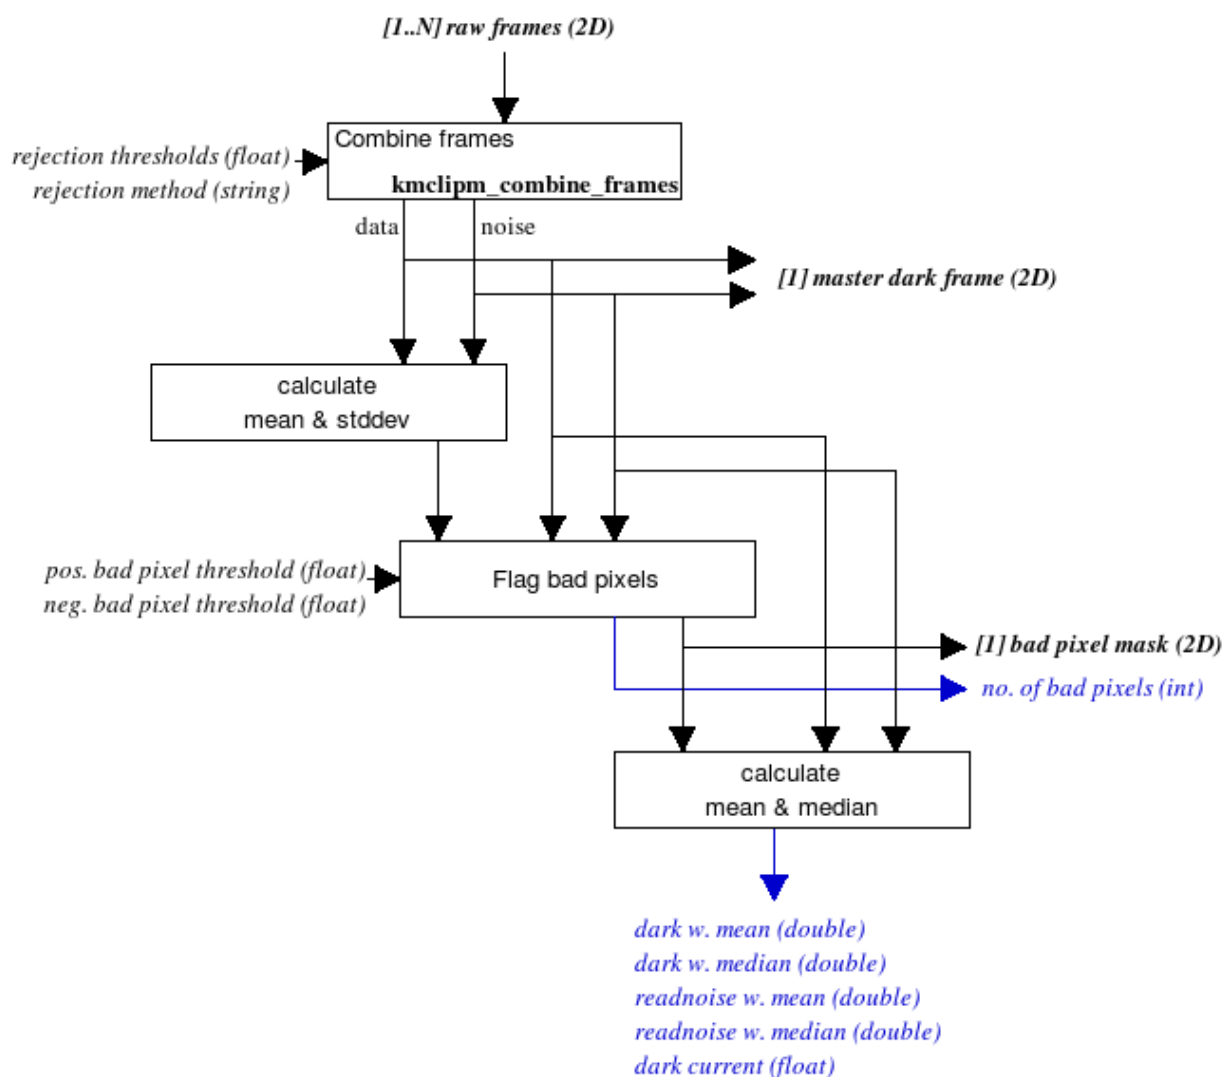

**Figure 23:** Flow chart of the recipe `kmo_dark`

The processing steps are:

1. From a series of dark exposures a dark frame (mean) and a noise map (std err) are calculated using pixel rejection.





- Then bad pixels above and below defined positive/negative threshold levels will be flagged and output to the temporary bad pixel mask (which will go into the `kmo_flat` recipe). The number of bad pixels is returned as QC1 parameter.
- Bias, readnoise and the dark current quality parameters will be calculated (see section 5.1.1 for comprehensive explanations on QC1 parameters).

### 7.1.1.3 Input Frames

KMOS type	DO category	Amount	Comments
RAW	DARK	$\geq 1$ ( $\geq 3$ recommended)	dark exposures

### 7.1.1.4 Fits Header Keywords

#### Primary Header

Keyword	Type	Value	Comments
NDIT	int	any	
EXPTIME	double	any	

#### Sub Headers

Keyword	Type	Value	Comments
EXPTIME	double	any	

### 7.1.1.5 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
pos_bad_pix_rej, neg_bad_pix_rej	double	pos_bad_pix_rej $\geq 0$ , neg_bad_pix_rej $\geq 0$	50.0 50.0	The positive and negative rejection threshold for bad pixels. (optional)
cmethod	string	"ksigma", "average", "min_max", "sum", "median"	"ksigma"	The averaging method to apply (optional)
file_extension	bool	TRUE, FALSE	FALSE	(optional)

#### Advanced parameters

Name	Type	valid values	Default	Comments
cpos_rej cneg_rej	double	cpos_rej $\geq 0$ , cneg_rej $\geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels (optional, applies only when --cmethod = "ksigma")
citer	int	citer $\geq 1$	3	The number of iterations for kappa-sigma-clipping. (optional, applies only when --cmethod = "ksigma")
cmax cmin	int	cmax $\geq 0$ cmin $\geq 0$	1 1	The number of maximum and minimum pixel values to clip with min/max-clipping (optional, applies only when



				<code>--cmethod = "min_max")</code>
--	--	--	--	-------------------------------------

## 7.1.1.6 Output Frames

KMOS type	DO Category	Comments
F2D	MASTER_DARK	Calculated master dark frames (with included noise frames)
B2D	BADPIXEL_DARK	Associated badpixel frames

## 7.1.1.7 Examples

```
$ esorex kmo_dark -pos_bad_pix_rej=2.1 dark.sof
```

with dark.sof containing:

dark_1.fits	DARK
dark_2.fits	DARK
dark_3.fits	DARK

## 7.1.2 **kmo\_flat:** **Master Flat Field**

Recipe name	used in recipe/function	uses recipe/function
kmo_flat	-	kmclipm_combine_frames

Create master flatfield frame and badpixel map to be used during science reduction.

### 7.1.2.1 **Description**

This recipe creates the master flat field and calibration frames needed for spatial calibration for all three detectors. It must be called after the **kmo\_dark**-recipe, which generates a bad pixel mask (badpixel\_dark.fits). The bad pixel mask will be updated in this recipe (goes into badpixel\_flat.fits). As input at least 3 dark frames, 3 frames with the flat lamp on are recommended. Additionally a badpixel mask from **kmo\_dark** is required.

In order to correct instrument flexure, the flat lamp on frames can be taken at different rotator angles and can be feed to the recipe in one go. For each rotator angle there will be 3 extensions, one for each detector, for every rotator angle. It is recommended to take calibration exposures in 60 degree increments, resulting in a set of 6 rotator angles. It is important, that the same angles are chosen for **kmo\_flat** and **kmo\_wave\_cal**.

The badpixel mask contains 0 for bad pixels and 1 for good ones.

The structure of the resulting xcal and ycal frames is quite complex since the arrangement of the IFUs isn't just linear on the detector. Basically the integer part of the calibration data shows the offset of each pixels centre in mas (milli arcsec) from the field centre. The viewing of an IFU is 2800mas (14pix\*0.2arcsec/pix). So the values in these two frames will vary between +/-1500 (One would expect 1400, but since the slitlets aren't expected to be exactly vertical, the values can even go up to around 1500). Additionally in the calibration data in y-direction the decimal part of the data designates the IFU to which the slitlet corresponds to (for each detector from 1 to 8). Because of the irregular arrangement of the IFUs not all x-direction calibration data is found in xcal and similarly not all y-direction calibration data is located in ycal. For certain IFUs they are switched and/or flipped in x- or y-direction:

For IFUs 1,2,3,4,13,14,15,16:	x- and y- data is switched
For IFUs 17,18,19,20:	y-data is flipped
For IFUs 21,22,23,24:	x-data is flipped
For IFUs 5,6,7,8,9,10,11,12:	x- and y- data is switched and x- and y- data is flipped

Furthermore frames can be provided for several rotator angles. In this case the resulting calibration frames for each detector are repeatedly saved as extension for every angle.

### **Advanced features:**

To create the badpixel mask the edges of all slitlets are fitted to a polynomial. Since it can happen that some of these fits (3 detectors \* 8 IFUs \* 14slitlets \* 2 edges (left and right edge of slitlet)= 672 edges) fail, the fit parameters are themselves fitted again to detect any outliers. By default the parameters of all left and all right edges are grouped individually and then fitted using chebyshev polynomials. The advantage of a chebyshev polynomial is, that it consists in fact of a series of orthogonal polynomials. This implies that the parameters of the polynomials are independent. This fact predestines the use of chebyshev polynomials for our case. So each individual parameter

can be examined independently. The reason why the left and right edges are fitted individually is that there is a systematic pattern specific to these groups. The reason for this pattern is probably to be found in the optical path the light is traversing.

The behaviour of this fitting step can be influenced via environment parameters:

- **KF\_ALLPARS** (default: 1)  
 When set to 1 all coefficients of the polynomial of an edge are to be corrected, also when just one of these coefficients is an outlier. When set to 0 only the outlier is to be corrected.
- **KF\_CH** (default: 1)  
 When set to 1 chebyshev polynomials are used to fit the fitted parameters. When set to 0 normal polynomials are used.
- **KF\_SIDES** (default: 2)  
 This variable can either be set to 1 or 2. When set to 2 the left and right edges are examined individually. When set to 1 all edges are examined as one group.
- **KF\_FACTOR** (default: 4)  
 This factor defines the threshold factor. All parameters deviating  $\text{KF\_FACTOR} \cdot \text{stddev}$  are to be corrected.

## **Basic parameters:**

`--badpix_thresh`

The threshold level to mark pixels as bad on the dark subtracted frames [%].

`--surrounding_pixels`

The amount of bad pixels to surround a specific pixel, to let it be marked bad as well.

`--cmethod`

Following methods of frame combination are available:

- **ksigma (default)**  
 An iterative sigma clipping. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:  

$$\text{val} > \text{mean} + \text{stdev} * \text{cpos\_rej}$$
 and  

$$\text{val} < \text{mean} - \text{stdev} * \text{cneg\_rej}$$
 where `--cpos_rej`, `--cneg_rej` and `--citer` are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2).
- **median**  
 At each pixel position the median is calculated.
- **average**  
 At each pixel position the average is calculated.
- **sum**  
 At each pixel position the sum is calculated.
- **min\_max**  
 The specified number of minimum and maximum pixel values will be rejected.  
`--cmax` and `--cmin` apply to this method.

## **Advanced parameters:**

`--cpos_rej`

`--cneg_rej`

--citer

see --cmethod = "ksigma"

--cmax

--cmin

see --cmethod = "min\_max"

--suppress\_extension

If set to TRUE, the arbitrary filename extensions are suppressed. If multiple products with the same category are produced, they will be numbered consecutively starting from 0

## 7.1.2.2 Flow Chart

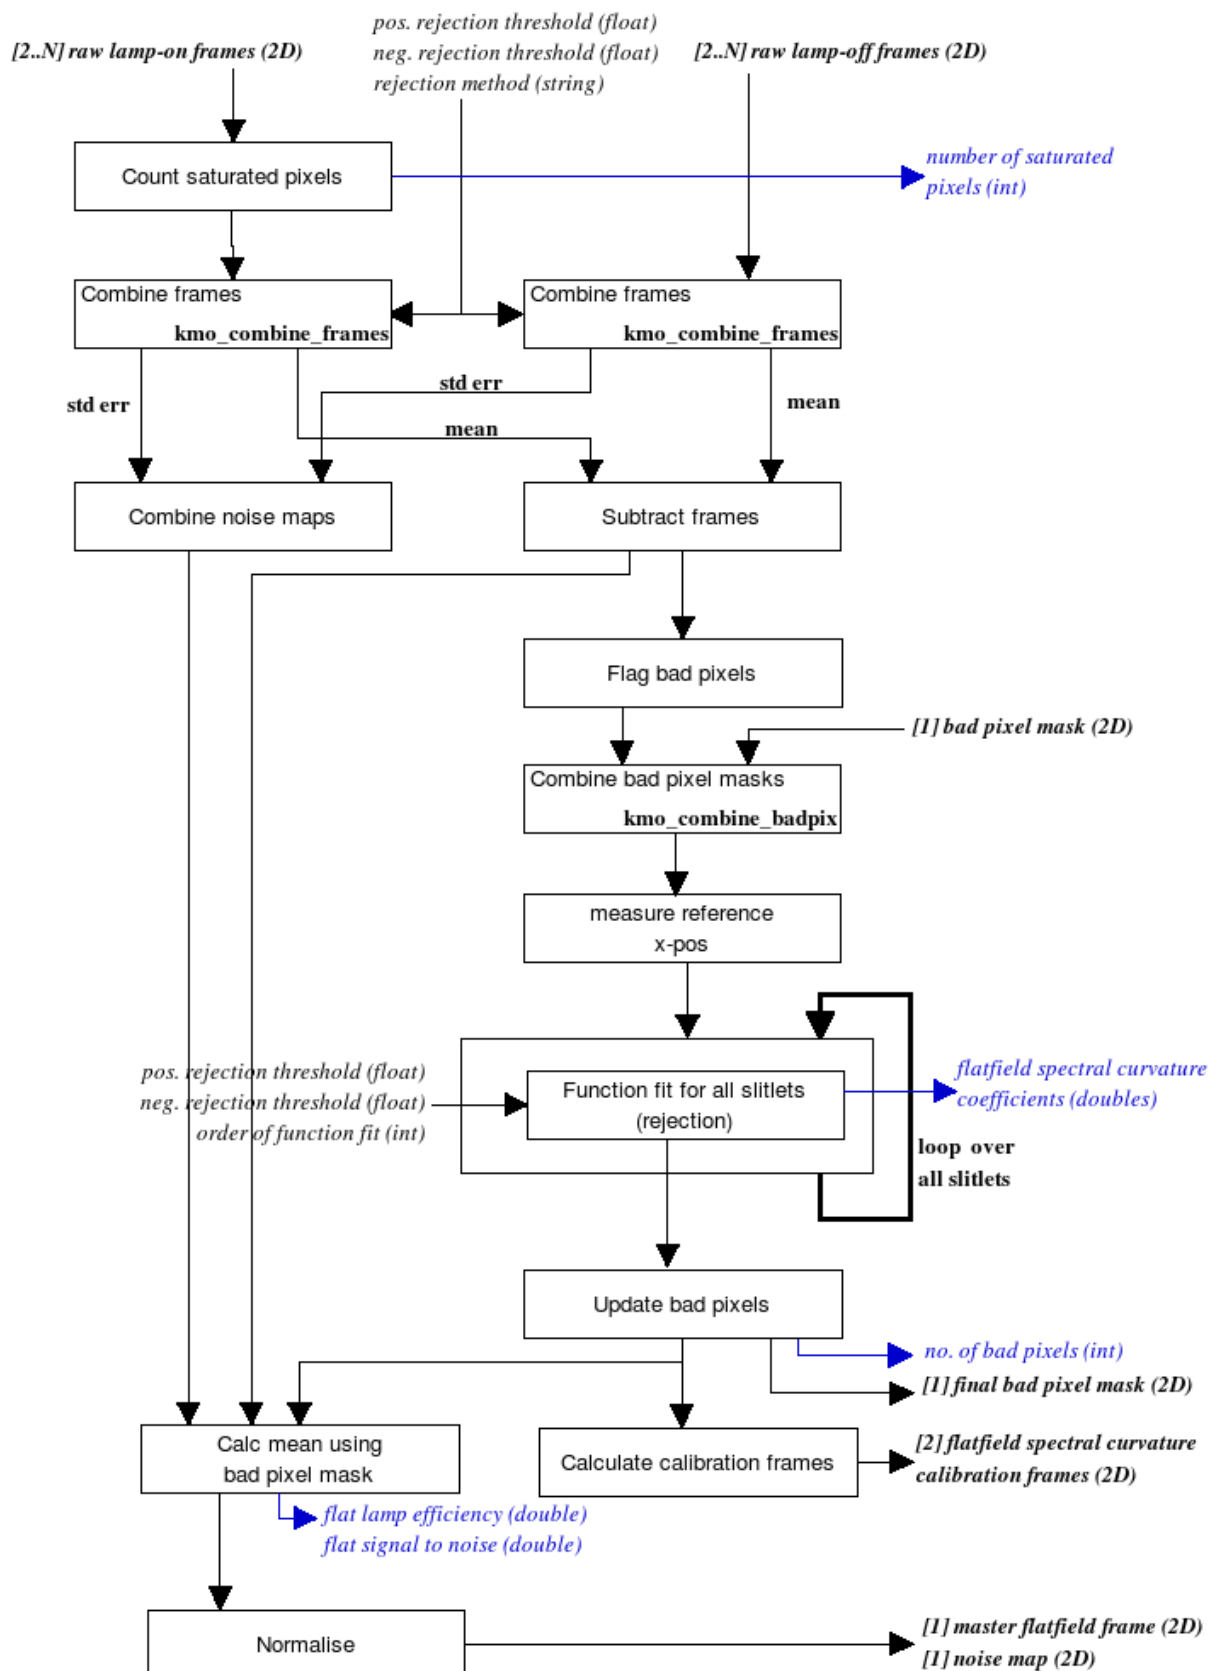


Figure 24: Flow chart of the recipe `kmo_flat`

The processing steps are:

1. The number of saturated pixels (>50'000) in the raw lamp-on frames is counted.
2. The mean frame and associated noise map (std err) from the lamp-on frames are calculated using pixel rejection.
3. Similarly, the mean frame and associated noise map from lamp-off frames will be computed.
4. The two mean frames are subtracted. The noise frames are combined.
5. To flag bad pixels preliminarily, the subtracted data is sorted. The lower 5% and upper 10% are cut off and then the position with the steepest slope is searched. 10% of the value at this position is taken as threshold level. Pixels below will be flagged as bad pixels. Additionally all pixels surrounded by at least 6 bad pixels are also flagged as bad. This bad pixel mask will be combined with the temporary bad pixel mask from `kmo_dark` recipe resulting into a preliminary bad pixel mask. (Preliminary because the slitlets are to wide at present, but the exact edges are calculated with the fitted edge information afterwards)
6. In the middle of the lower half und upper half of the frame a line profile is taken and analysed for eventually existing rotation, cut or missing slitlets. When the number of slitlets present and their approximate position has been determined, along the y-axis every 9 pixels a gaussfit is done to get a better approximation of the edge. At a last step, a 3<sup>rd</sup> order polynomial is fitted to the edge. Out of the parameters of the polynomial the QC parameters QC GAP MEAN, QC GAP SDV, QC GAP MAXDEV, QC SLIT MEAN, QC SLIT SDV, QC SLIT MAXDEV are calculated.
7. Now knowing the exact position and shape of the edge, the bad pixel mask is updated and the spectral curvature calibration frames (LUTs), one in x- and one in y-direction, are calculated. Furthermore an eventually existing spectral gradient will be normalised for each slitlet separately. For this all values in the same row of a slitlet are averaged, then a 3<sup>rd</sup> order polynomial is fitted to the resulting data points. The polynomial is normalised and the slitlet-data will be divided by it.

Now the data and noise frames are normalised as a whole to unity using the mean calculated without bad pixels. Out of these operations we get the master flatfield frame, the noise map and QC1 parameters indicating lamp efficiency and signal to noise.

### 7.1.2.3 Input Frames

KMOS type	DO category	Amount	Comments
RAW	FLAT_ON	$\geq 1$ ( $\geq 3$ recommended)	Flatlamp-on frames, optimally at least 3 for every rotator angle
RAW	FLAT_OFF	$\geq 1$ ( $\geq 3$ recommended)	Flatlamp-off frames (dark exposures)
B2D	BADPIXEL_DARK	1	badpixel frame (from <code>kmo_dark</code> )

### 7.1.2.4 Fits Header Keywords

#### Primary Header

Keyword	Type	Value	Comments
DIT	double	any	integration time (equals EXPTIME)
NDIT	int	1	
ESO DET READ CURNAME	string	Double, Fowler,	detector readout mode



		Nondest	
ESO INS LAMP1 ST	bool	FALSE	Arc lamp must be off
ESO INS LAMP2 ST	bool	FALSE	Arc lamp must be off
ESO INS LAMP3 ST	bool	TRUE	FLAT_ON: Flat lamp must be on FLAT_OFF: must be off (can be on if ESO INS FILTx ID is 'Block')
ESO INS LAMP4 ST	bool	TRUE	Either LAMP3 or LAMP4 must be on (LAMP4 is a spare)

**Sub Headers**

None

**7.1.2.5 Configuration Parameters****Basic parameters**

Name	Type	valid values	Default	Comments
badpix_thresh	int	$100 \geq \text{badpix\_thresh} \geq 0$	35	in percent
surrounding_pixels	int	$8 \geq \text{surrounding\_pixels} \geq 0$	5	The amount of bad pixels to surround a specific pixel, to let it be marked bad as well (optional)
cmethod	string	"ksigma" "min_max" "average" "median" "sum"	"ksigma"	The averaging method to apply (optional)

**Advanced parameters**

Name	Type	valid values	Default	Comments
cpos_rej cneg_rej	double	$\text{cpos\_rej} \geq 0$ , $\text{cneg\_rej} \geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels (optional, applies only when <code>--cmethod = "ksigma"</code> )
citer	int	$\text{citer} \geq 1$	3	The number of iterations for kappa-sigma-clipping. (optional, applies only when <code>--cmethod = "ksigma"</code> )
cmax cmin	int	$\text{cmax} \geq 0$ $\text{cmin} \geq 0$	1 1	The number of maximum and minimum pixel values to clip with min/max-clipping (optional, applies only when <code>--cmethod = "min_max"</code> )
suppress_extension	bool	TRUE, FALSE	FALSE	



## 7.1.2.6 Output Frames

KMOS type	DO Category	Comments
F2D	MASTER_FLAT	Normalised flat field (with included noise frames)
B2D	BADPIXEL_FLAT	Updated bad pixel mask
F2D	XCAL	Calibration frame 1 (spatial dimension)
F2D	YCAL	Calibration frame 2 (spatial dimension)
F2L	FLAT_EDGE	Intermediate product needed for kmo_wave_cal and optionally for kmo_illumination. It contains the parameters of the fitted edges of all IFUs of all detectors.

## 7.1.2.7 Examples

```
$ esorex kmo_flat flat.sof
```

with flat.sof containing:

```
flat_off_1.fits          FLAT_OFF
flat_off_2.fits          FLAT_OFF
flat_off_3.fits          FLAT_OFF
flat_on_1_0deg.fits      FLAT_ON
flat_on_2_0deg.fits      FLAT_ON
flat_on_3_0deg.fits      FLAT_ON
flat_on_1_60deg.fits     FLAT_ON
flat_on_2_60deg.fits     FLAT_ON
flat_on_3_60deg.fits     FLAT_ON
flat_on_1_120deg.fits    FLAT_ON
flat_on_2_120deg.fits    FLAT_ON
flat_on_3_120deg.fits    FLAT_ON
flat_on_1_180deg.fits    FLAT_ON
flat_on_2_180deg.fits    FLAT_ON
flat_on_3_180deg.fits    FLAT_ON
flat_on_1_240deg.fits    FLAT_ON
flat_on_2_240deg.fits    FLAT_ON
flat_on_3_240deg.fits    FLAT_ON
flat_on_1_300deg.fits    FLAT_ON
flat_on_2_300deg.fits    FLAT_ON
flat_on_3_300deg.fits    FLAT_ON
badpixel_dark.fits      BADPIXEL_DARK
```

### 7.1.3 **kmo\_wave\_cal:** **Wavelength Calibration**

Recipe name	used in recipe/function	uses recipe/function
kmo_wave_cal	-	-

Create a calibration frame encoding the spectral position (i.e. wavelength) of each pixel on the detector.

#### 7.1.3.1 **Description**

This recipe creates the wavelength calibration frame needed for all three detectors. It must be called after the `kmo_flat` recipe, which generates the two spatial calibration frames needed in this recipe. As input a lamp-on frame, a lamp-off frame, the flat badpixel frame, the spatial calibration frames and the list with the reference arclines are required.

In order to correct instrument flexure, the flat lamp on frames can be taken at different rotator angles and can be feed to the recipe in one go. For each rotator angle there will be 3 extensions, one for each detector, for every rotator angle. It is recommended to take calibration exposures in 60 degree increments, resulting in a set of 6 rotator angles. It is important, that the same angles are chosen for `kmo_flat` and `kmo_wave_cal`.

An additional output frame is the resampled image of the reconstructed arc frame. All slitlets of all IFUs are aligned one next to the other. This frame serves for quality control. One can immediately see if the calibration was successful.

The lists of reference arclines are supposed to contain the lines for both available calibration arc-lamps, i.e. Argon and Neon. The list is supposed to be a F2L KMOS FITS file with three columns:

1. Reference wavelength
2. Relative strength
3. String either containing “Ar” or “Ne”

The recipe extracts, based on the header keywords, either the applying argon and/or neon emission lines. Below are the plots of the emission lines for both argon and neon. The marked lines are the ones used for wavelength calibration.

Furthermore frames can be provided for several rotator angles. In this case the resulting calibration frames for each detector are repeatedly saved as extension for every angle.

#### **Basic parameters:**

`--order`

The polynomial order to use for the fit of the wavelength solution. 0: (default) The appropriate order is choosen automatically depending on the waveband. Otherwise an order of 6 is recommended, except for IZ-band, there order 4 should be used.

#### **Advanced parameters:**

`--b_samples`

The number of samples in spectral direction for the resampled image. Ideally this number should be about the same size as the detector.

`--b_start`

--b\_end


Used to define manually the start and end wavelength for the resampled image. By default the internally defined values are used (see Section 6.3).

--suppress\_extension


If set to TRUE, the arbitrary filename extensions are suppressed. If multiple products with the same category are produced, they will be numbered consecutively starting from 0

The lines used to determine the quality of wavelength calibration are as follows:


Band	Argon	Neon
<b>H</b>	1.67446 $\mu\text{m}$	1.71666 $\mu\text{m}$
<b>HK</b>	1.79196 $\mu\text{m}$	1.80882 $\mu\text{m}$
<b>IZ</b>	0.922703 $\mu\text{m}$	0.85676 $\mu\text{m}$
<b>K</b>	2.15401 $\mu\text{m}$	2.25365 $\mu\text{m}$
<b>YJ</b>	1.12430 $\mu\text{m}$	1.17700 $\mu\text{m}$

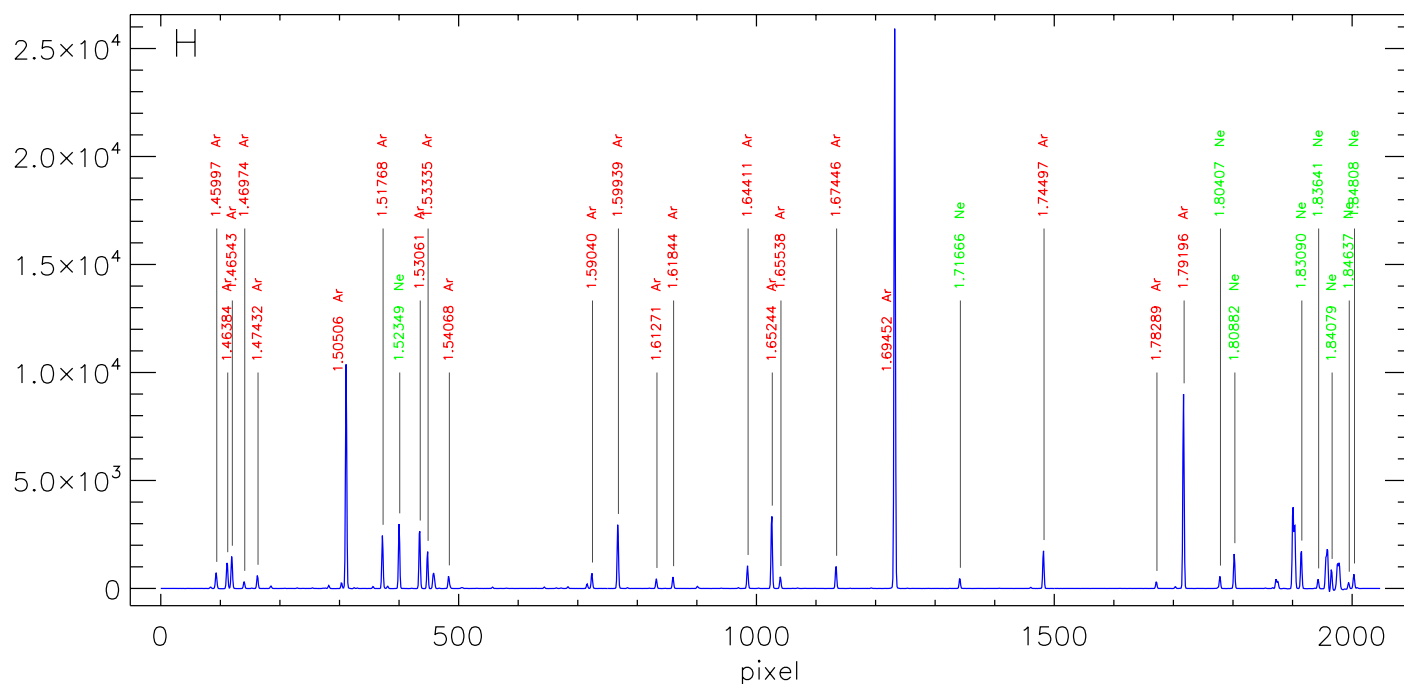


**Figure 25:** H-band argon and neon emission lines

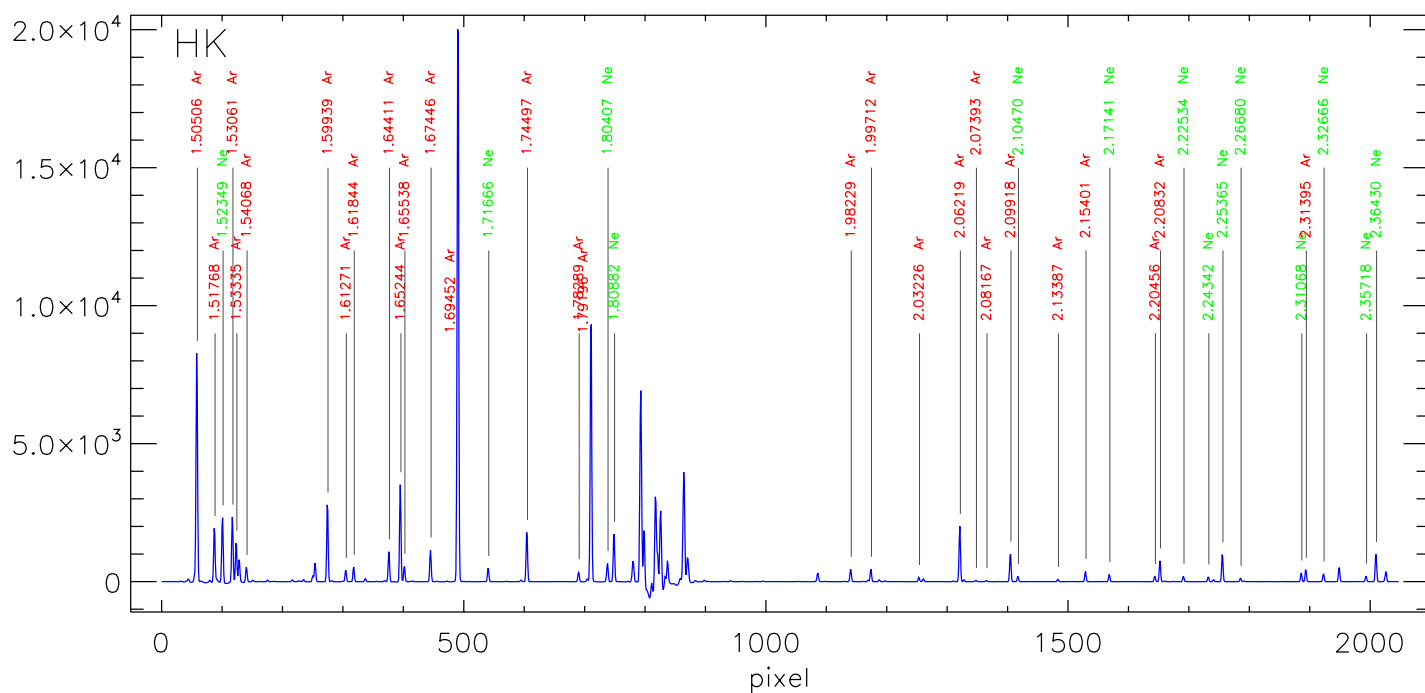


**Figure 26** HK-band argon and neon emission lines

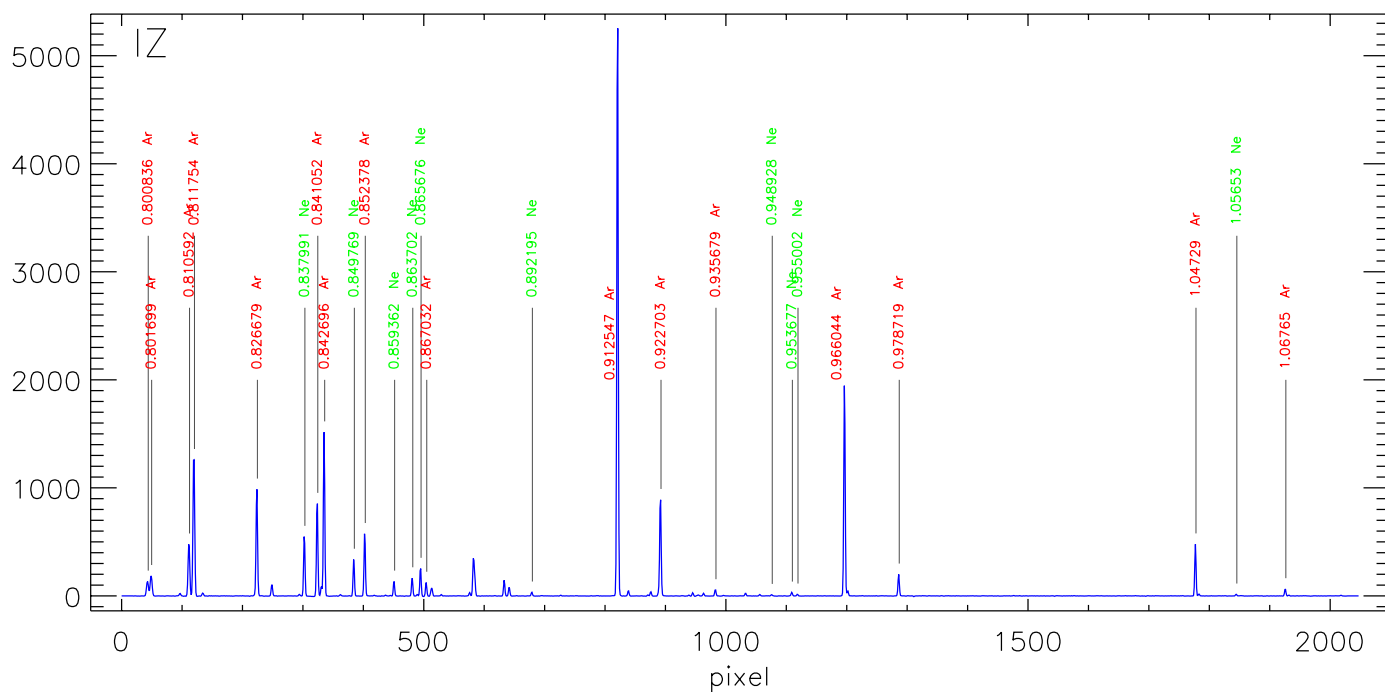

**Figure 27** IZ-band argon and neon emission lines

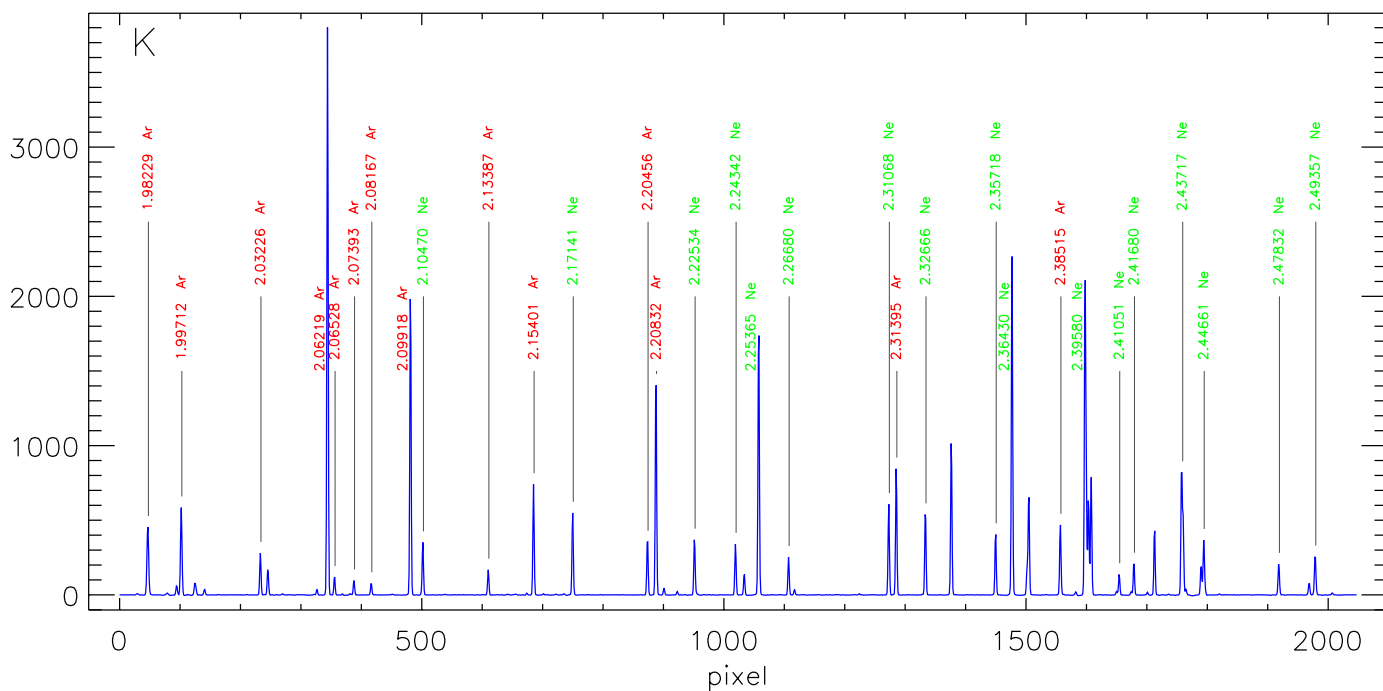


**Figure 28** K-band argon and neon emission lines

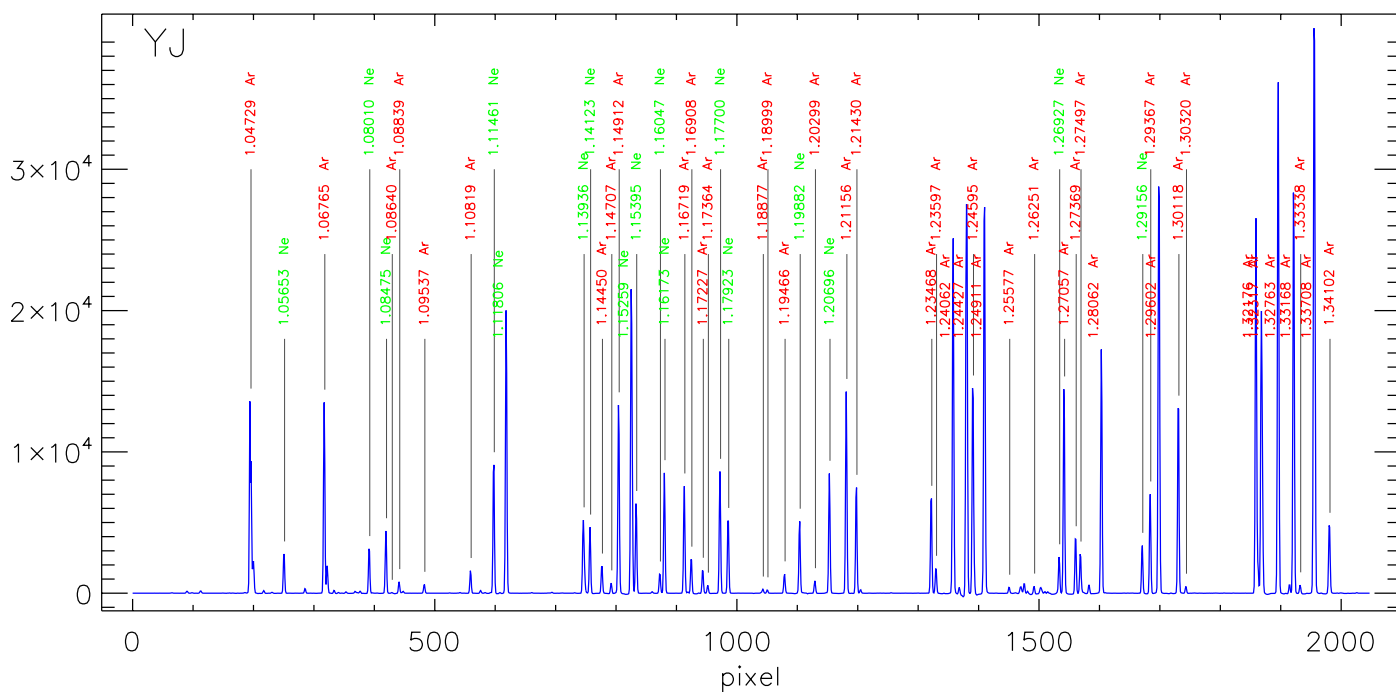

**Figure 29** YJ-band argon and neon emission lines

### 7.1.3.2 Flow Chart

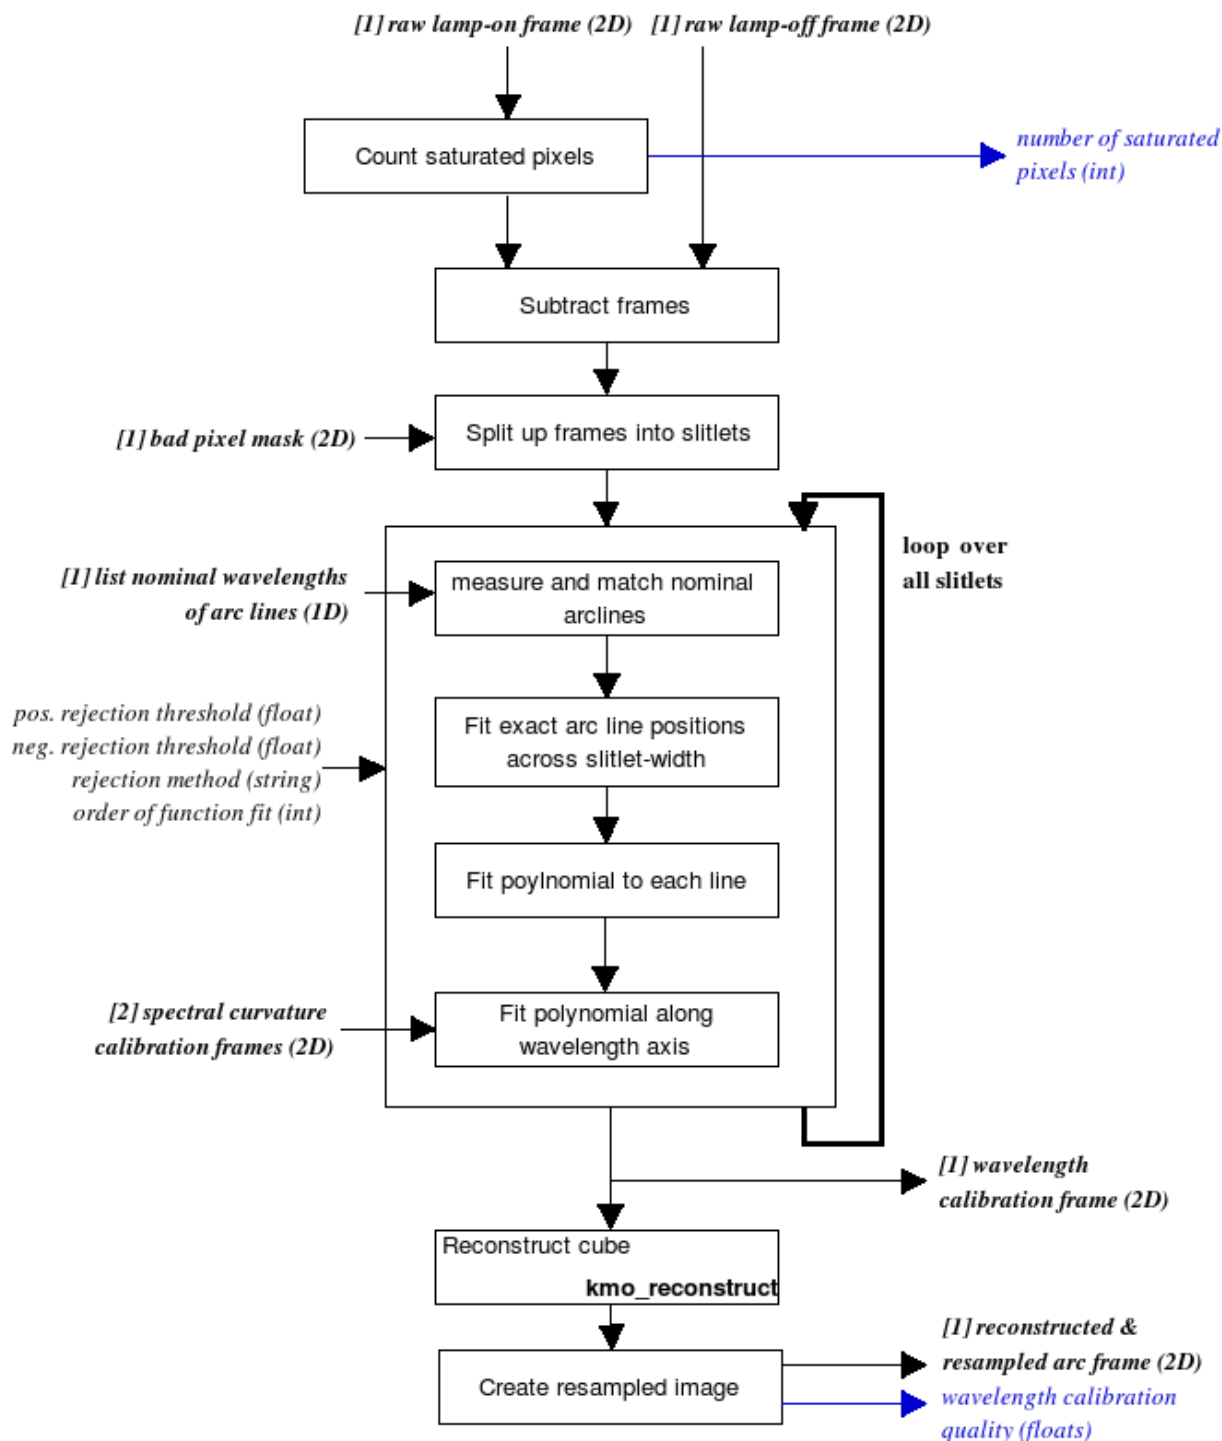

**Figure 30:** Flow chart of the recipe kmo\_wave\_cal

The processing steps are:

1. A raw lamp-on and a raw lamp-off frame taken with the internal arc lamp are subtracted.
2. The frame is split up into its slitlets (14 per IFU) using the flatfield badpixel mask. The following processing steps are applied to every slitlet. Bad pixels are ignored.



3. The  $\lambda$  positions of the arc lines will be measured and matched to a list of nominal arclines defined in an external file. This results in a first estimate where the lines lie in the slitlet.
4. Then the exact positions of all lines across the slitlet width are fitted using a gauss fit.
5. A polynomial is fit to each line across the slitlet in order to extrapolate nonexistent values resulting from rotation of the slitlets.
6. A polynomial is fitted along the wavelength direction to get the wavelength calibration data. The product of these operations so far is the 2D wavelength calibration frame (LUT).
7. As last step the provided arc frame will be reconstructed as cube and be decomposed into its slitlets which are saved into a frame with one slitlet beside the other. This way the quality of the wavelength calibration file can be determined quickly visually.

All fits will be iterated twice, rejecting pixels which deviate by more than a few standard deviations.

The quality of the wavelength calibration is assessed and recorded in several QC1 parameters.

### 7.1.3.3 Input Frames

KMOS type	DO category	Amount	Comments
RAW	ARC_ON	$\geq 1$	Arclamp-on exposure, exactly one for every rotator angle
RAW	ARC_OFF	1	Arclamp-off exposure
F2D	XCAL	1	Calibration frame 1
F2D	YCAL	1	Calibration frame 2
F1L	ARC_LIST	1	List of reference arc lines, either for Argon or Neon or both combined. The first column has to contain the wavelengths and the second one the intensities
F2L	FLAT_EDGE	1	Frame containing the fitted edges of all IFUs.
F2L	REF_LINES	1	Reference line table
F2L	WAVE_BAND	1	Table with start-/end-values of wavelengthrange

### 7.1.3.4 Fits Header Keywords

#### **Primary Header**

Keyword	Type	Value	Comments
MINDIT	double	~2.5	Estimated value
NDIT	int	1	
EXPTIME	double	any	

#### **Sub Headers**

Keyword	Type	Value	
EXPTIME	double	any	all frames

### 7.1.3.5 Configuration Parameters

#### **Basic parameters:**

Name	Type	valid values	Default	Comments
------	------	--------------	---------	----------





order	int	order $\geq$ 0	0	The polynomial order to use for the fit of the wavelength solution. 0: (default) The appropriate order is chosen automatically depending on the waveband. Otherwise an order of 6 is recommended, except for IZ-band, there order 4 should be used.
-------	-----	----------------	---	--

***Options for pipeline developers only:***

Name	Type	valid values	Default	Comments
disp	double	disp > 0.0	-1.0	The expected spectral dispersion. By default the correct value is gained via the header keywords regarding filter configuration. This parameter is for testing the recipe with simulated data only.
flip	bool	TRUE, FALSE	TRUE	For some test data sets the wavelength is ascending from bottom to top, so this parameter has to be set to FALSE

***Advanced parameters***

Name	Type	valid values	Default	Comments
<i>b_samples</i>	int	<i>b_samples</i> > 2	2048	Nr. of samples of reconstructed data for the wavelength
<i>b_start</i> <i>b_end</i>	double	<i>b_start</i> > 0.0 <i>b_end</i> > <i>b_start</i>	-1.0	Start and end wavelength. The defaults of -1.0 instruct to use the internally defined range (see Section 6.3)
suppress_extension	bool	TRUE, FALSE	FALSE	

**7.1.3.6 Output Frames**

KMOS type	DO Category	Comments
F2D	LCAL	Calibration frame 3 (spectral dimension)
F2D	DET_IMG_WAVE	Resampled image of the reconstructed arc frame. All slitlets of all IFUs are aligned one next to the other.

***Additional Output***

All recipes doing reconstruction of cubes create a LUT which by default is saved to disk. For further information see Sec. 6.4.

**7.1.3.7 Examples**

```
$ esorex kmo_wave_cal arc.sof
```

with arc.sof containing:

```
arc_on.fits          ARC_ON
arc_off.fits         ARC_OFF
```



xcal_HHH.fits	XCAL
ycal_HHH.fits	YCAL
flat_edge_HHH.fits	FLAT_EDGE
kmos_ar_ne_list_h.fits	ARC_LIST
kmos_wave_ref_table.fits	REF_LINES
kmos_wave_band.fits	WAVE_BAND



#### 7.1.4 **kmo\_illumination:** **Illumination Correction**

Recipe name	used in recipe/function	uses recipe/function
kmo_illumination	-	kmo_make_image kmo_reconstruct

Creates a calibration file to correct spatial non-uniformity of flatfield.

##### 7.1.4.1 **Description**

This recipe creates the spatial non-uniformity calibration frame needed for all three detectors. It can be called after the `kmo_wave_cal`-recipe, which generates the spectral calibration frame needed in this recipe. As input at least a sky, a master dark, a master flat and the spatial and spectral calibration frames are required. The created product, the illumination correction, can be used as input for `kmo_std_star` and `kmo_sci_red`.

##### **Basic parameters:**

`--imethod`

The interpolation method used for reconstruction.

`--range`

The spectral range [um] to combine when collapsing the reconstructed cubes.

##### **Advanced parameters:**

`--flux`

Specify if flux conservation should be applied.

`--add_all`

By default the first FLAT\_SKY frame is omitted, since in the `KMOS_spec_cal_skyflat` template this is an acquisition frame to estimate the needed exposure time for the subsequent FLAT\_SKY frames. If anyway all frames should be considered, set this parameter to TRUE.

`--neighborhoodRange`

Defines the range to search for neighbors during reconstruction

`--b_samples`

The number of samples in spectral direction for the reconstructed cube. Ideally this number should be greater than 2048, the detector size.

`--b_start`

`--b_end`

Used to define manually the start and end wavelength for the reconstructed cube. By default the internally defined values are used (see Section 6.3).

`--cmethod`

Following methods of frame combination are available:

- ***ksigma (default)***

An iterative sigma clipping. For each position all pixels in the spectrum are examined. If

they deviate significantly, they will be rejected according to the conditions:

$$\text{val} > \text{mean} + \text{stdev} * \text{cpos\_rej}$$

and

$$\text{val} < \text{mean} - \text{stdev} * \text{cneg\_rej}$$

where `--cpos_rej`, `--cneg_rej` and `--citer` are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2).

- **median**

At each pixel position the median is calculated.

- **average**

At each pixel position the average is calculated.

- **sum**

At each pixel position the sum is calculated.

- **min\_max**

The specified number of minimum and maximum pixel values will be rejected.

`--cmax` and `--cmin` apply to this method.

`--cpos_rej`

`--cneg_rej`

`--citer`

see `--cmethod = "ksigma"`

`--cmax`

`--cmin`

see `--cmethod = "min_max"`


`--pix_scale`

Change the pixel scale [arcsec]. Default of 0.2" results into cubes of 14x14pix, a scale of 0.1 results into cubes of 28x28pix, etc.

`--suppress_extension`

If set to TRUE, the arbitrary filename extensions are suppressed. If multiple products with the same category are produced, they will be numbered consecutively starting from 0.

### 7.1.4.2 Flow Chart

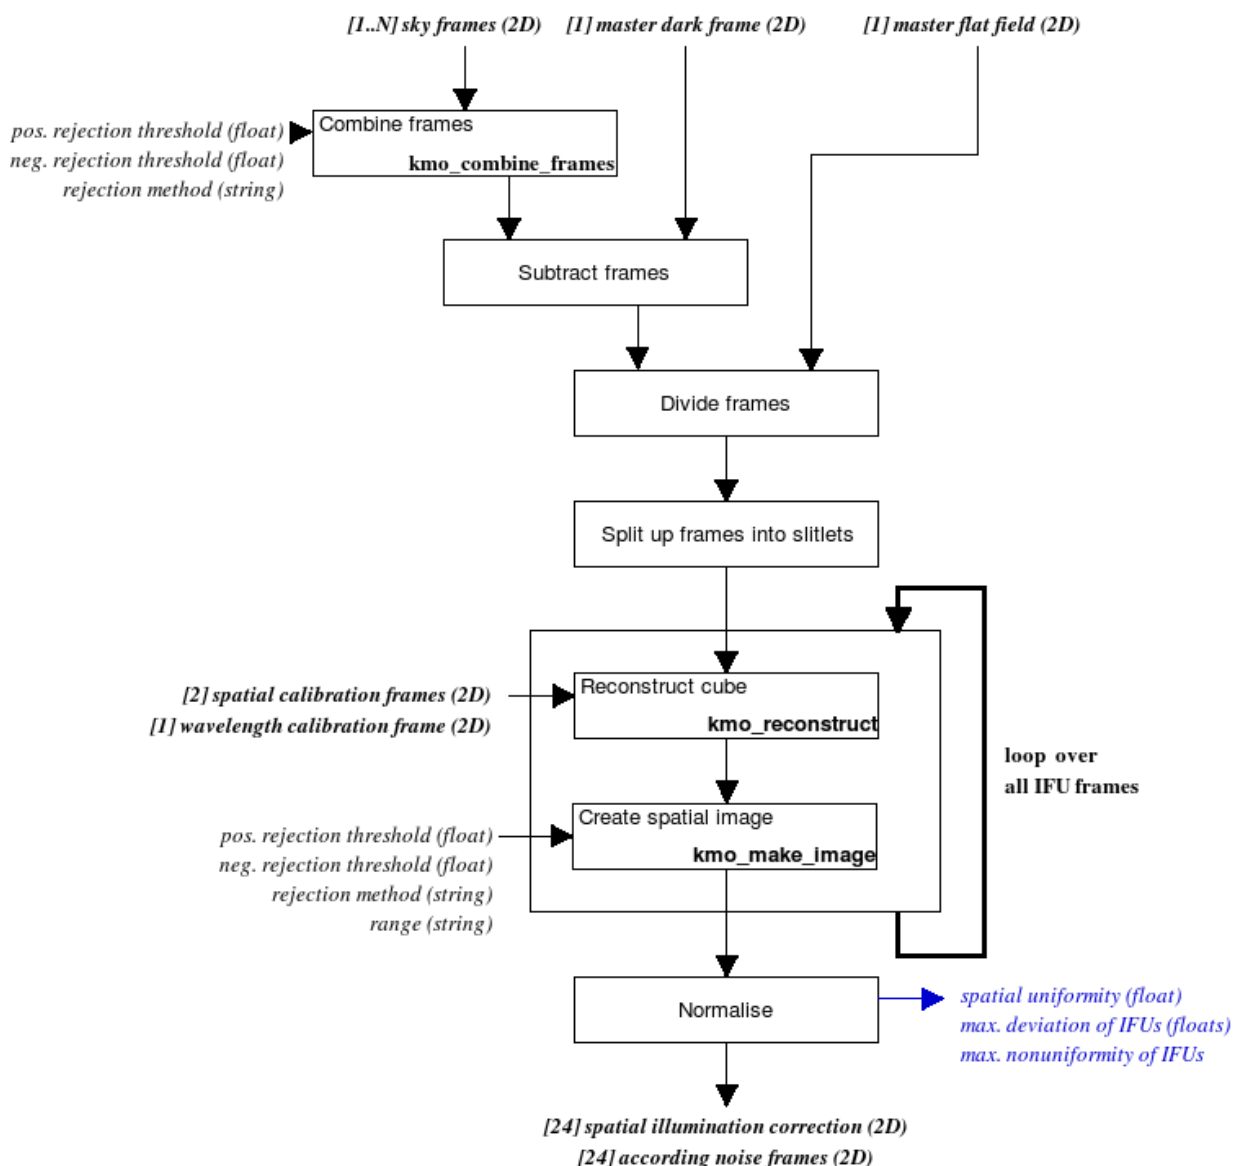

**Figure 31:** Flow chart of the recipe kmo\_illumination

The processing steps are:

1. The sky frames are averaged using pixel rejection with a large sigma for clipping.
2. An appropriate dark frame will be subtracted. The result is divided by the master flat field.
3. The frame is split up into frames referring to single IFUs.
4. Now the cubes are reconstructed (one for each IFU) using a bad pixel mask (from kmo\_flat), a spectral curvature calibration frame (from kmo\_flat) and a wavelength calibration frame (from kmo\_wave\_cal) and subsequently collapsed to spatial images.
5. The images will be normalized as a group. (i.e. so that the mean of all frames is unity).

Furthermore several QC1 parameters are calculated, see section 5.1.4 for details.

### 7.1.4.3 Input Frames

KMOS type	DO category	Amount	Comments
F2D	FLAT_SKY	$\geq 1$	Flat sky exposure



F2D	MASTER_DARK	1	Master dark frame
F2D	MASTER_FLAT	1	Master flat frame
F2D	XCAL	1	Spatial calibration file
F2D	YCAL	1	Spatial calibration file
F2D	LCAL	1	Spectral calibration file
F2L	WAVE_BAND	1	Table with start-/end-values of wavelength range
F2L	FLAT_EDGE	0 or 1	Table with the fitted slitlet edges from kmo_flat. MASTER_FLAT will be shifted to match FLAT SKY frames.

#### 7.1.4.4 Fits Header Keywords

##### **Primary Header**

None

##### **Sub Headers**

None

#### 7.1.4.5 Configuration Parameters

##### **Basic parameters**

Name	Type	valid values	Default	Comments
<i>imethod</i>	string	“NN” “lwNN” “swNN” “MS”, “CS”	“CS”	Interpolation method for reconstruction: NN: Nearest Neighbor lwNN: linear weighted NN swNN: square weighted NN MS: Modified Shepard’s method CS: Cubic spline (optional)
<i>range</i>	string	“x1_start,x1_end; x2_start,x2_end”	“”	The spectral ranges in microns to combine when collapsing the reconstructed cubes spectrally

##### **Advanced parameters**

Name	Type	valid values	Default	Comments
<i>flux</i>	bool	TRUE, FALSE	FALSE	Apply flux conservation
<i>add_all</i>	bool	TRUE, FALSE	FALSE	Considering 1 <sup>st</sup> FLAT_SKY or not
<i>neighborhoodRange</i>	double	$\geq 1$	1.001	Defines the range to search for neighbors during reconstruction
<i>b_samples</i>	int	$b\_samples > 2$	2048	Nr. of samples of reconstructed data for the wavelength



<i>b_start</i> <i>b_end</i>	double	$b\_start > 0.0$ $b\_end > b\_start$	-1.0	Start and end wavelength. The defaults of -1.0 instruct to use the internally defined range (see Section 6.3)
cmethod	string	"ksigma" "min_max" "average" "median" "sum"	"ksigma"	The averaging method to apply ( <i>optional</i> )
cpos_rej cneg_rej	double	$cpos\_rej \geq 0$ , $cneg\_rej \geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels ( <i>optional, applies only when --cmethod = "ksigma"</i> )
citer	int	$citer \geq 1$	3	The number of iterations for kappa-sigma-clipping. ( <i>optional, applies only when --cmethod = "ksigma"</i> )
cmax cmin	int	$cmax \geq 0$ $cmin \geq 0$	1 1	The number of maximum and minimum pixel values to clip with min/max-clipping ( <i>optional, applies only when --cmethod = "min_max"</i> )
<i>pix_scale</i>	double	TRUE, FALSE	0.2	The pixel scale: 0.2 arcsec results in cubes of 14x14 pixels. 0.1 arcsec result in cubes of 28x28 pixels
<i>suppress_extension</i>	bool	TRUE, FALSE	FALSE	

#### 7.1.4.6 Output Frames

KMOS type	DO Category	Comments
F2I	ILLUM_CORR	The spatial non-uniformity calibration frame
F2L	SKYFLAT_EDGE	The parameters of the fitted edges of all IFUs of all detectors. From the FLAT_SKY frames

#### **Additional Output**

All recipes doing reconstruction of cubes create a LUT which by default is saved to disk. For further information see Sec. 6.4.

#### 7.1.4.7 Examples

```
$ esorex kmo_illumination illum.sof
           with illum.sof containing:
```





sky1.fits	FLAT_SKY
sky2.fits	FLAT_SKY
sky3.fits	FLAT_SKY
master_dark.fits	MASTER_DARK
master_flat_HHH.fits	MASTER_FLAT
xcal_HHH.fits	XCAL
ycal_HHH.fits	YCAL
lcal_HHH.fits	LCAL
kmos_wave_band.fits	WAVE_BAND
flat_edge_HHH.fits	FLAT_EDGE

## 7.1.5 **kmo\_std\_star:** **Telluric Standard Star**

Recipe name	used in recipe/function	uses recipe/function
kmo_std_star	-	kmo_make_image kmo_reconstruct_sci kmo_extract_spec kmo_fit_profile kmo_arithmetic

Creates a spectrum for telluric correction and derives zeropoint for flux calibration. In addition, this will estimate the spatial resolution (PSF).

### 7.1.5.1 **Description**

This recipe creates a telluric calibration frame and a PSF frame. It accepts an optional illumination correction frame as input created with the `kmo_illumination`-recipe.

Since there won't be enough standard stars to observe for all IFUs in one exposure, one has to do several exposures in a way that there is at least one standard star and one sky exposure in each IFU. A internal data organiser will analyse the provided exposures and select the appropriate frames as follows:

1. For each IFU the first standard star in the list of provided exposures is taken. All subsequent standard star exposures for this IFU will be ignored
2. A corresponding sky exposure will be chosen which will be as close in time to the standard star exposure as possible.
3. For any IFUs not containing a standard star and a sky exposure an empty frame will be returned.

#### **Basic parameters:**

`--startype`

If this parameter is specified, the stored star types of the observed objects in the FITS headers are overridden. This value applies to all objects examined in the input frames. Examples would be "A3I", "G3IV" or "K0I". The first letter defines the star type, the second letter the spectral class and the last letters the luminosity class.

`--magnitude`

If this parameter is specified, the stored magnitudes in the FITS headers are overridden. For HK two magnitudes for each H and K have to be specified. All other gratings just use a single magnitude. If two values are provided, they have to be separated with a comma.

`--fmethod`

The type of function that should be fitted spatially to the collapsed image. This fit is used to create a mask to extract the spectrum of the object. Valid values are "gauss" and "moffat".

`--imethod`

The interpolation method used for reconstruction. As default 'CS' is selected. Note that no error spectra will be generated for this interpolation method. Select a nearest neighbour method otherwise.

`--range`

The spectral range [um] to combine when collapsing the reconstructed cubes.

--save\_cubes

Set this parameter to TRUE in order to save the reconstructed cubes.

## **Advanced parameters:**

--flux

Specify if flux conservation should be applied.

--neighborhoodRange

Defines the range to search for neighbors during reconstruction

--b\_samples

The number of samples in spectral direction for the reconstructed cube. Ideally this number should be greater than 2048, the detector size.

--b\_start

--b\_end

Used to define manually the start and end wavelength for the reconstructed cube. By default the internally defined values are used (see Section 6.3).

--cmethod

Following methods of frame combination are available:

- **ksigma (default)**

An iterative sigma clipping. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:

$val > mean + stdev * cpos\_rej$

and

$val < mean - stdev * cneg\_rej$

where --cpo<sub>s</sub>\_rej, --cne<sub>g</sub>\_rej and --citer are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2).

- **median**

At each pixel position the median is calculated.

- **average**

At each pixel position the average is calculated.

- **sum**

At each pixel position the sum is calculated.

- **min\_max**

The specified number of minimum and maximum pixel values will be rejected.

--cmax and --cmin apply to this method.

--cpo<sub>s</sub>\_rej

--cne<sub>g</sub>\_rej

--citer

see --cmethod = "ksigma"

--cmax

--cmin

see `--cmethod = "min_max"`

`--xcal_interpolation`

If TRUE interpolate the pixel position in the slitlet (xcal) using the two closest rotator angles in the calibration file. Otherwise take the values of the closest rotator angle.

`--suppress_extension`

If set to TRUE, the arbitrary filename extensions are suppressed. If multiple products with the same category are produced, they will be numbered consecutively starting from 0

## 7.1.5.2 Flow Chart

The flowchart for this recipe is split up in two diagrams. To simplify the flowchart the internal data organising workflow isn't depicted. All steps apply to each active IFU individually. The resulting PSF frames, telluric & error spectra of all processed IFUs are merged into the defined output frames.


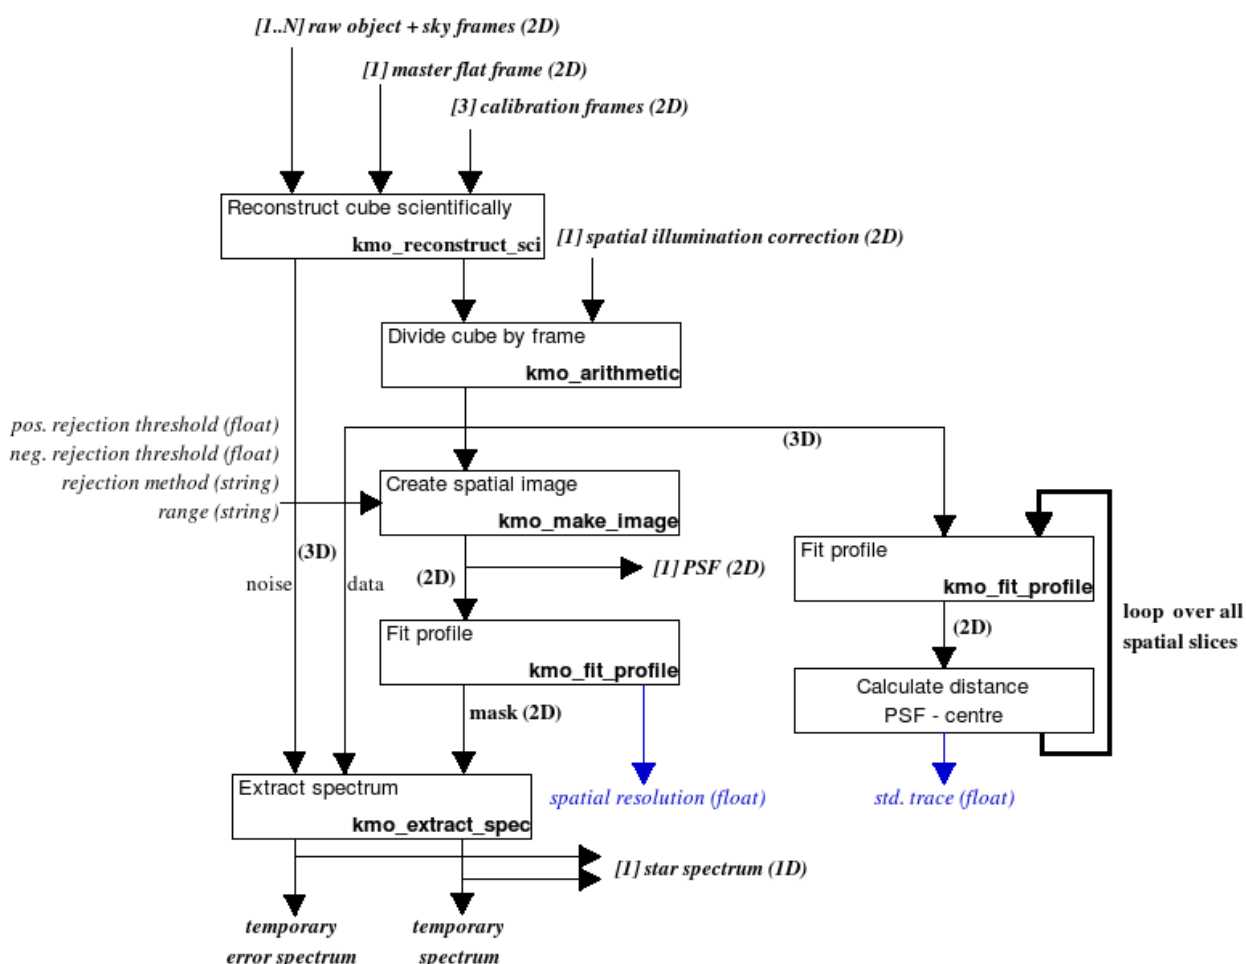


Figure 32: Flow chart of the recipe kmo\_std\_star (Part 1)

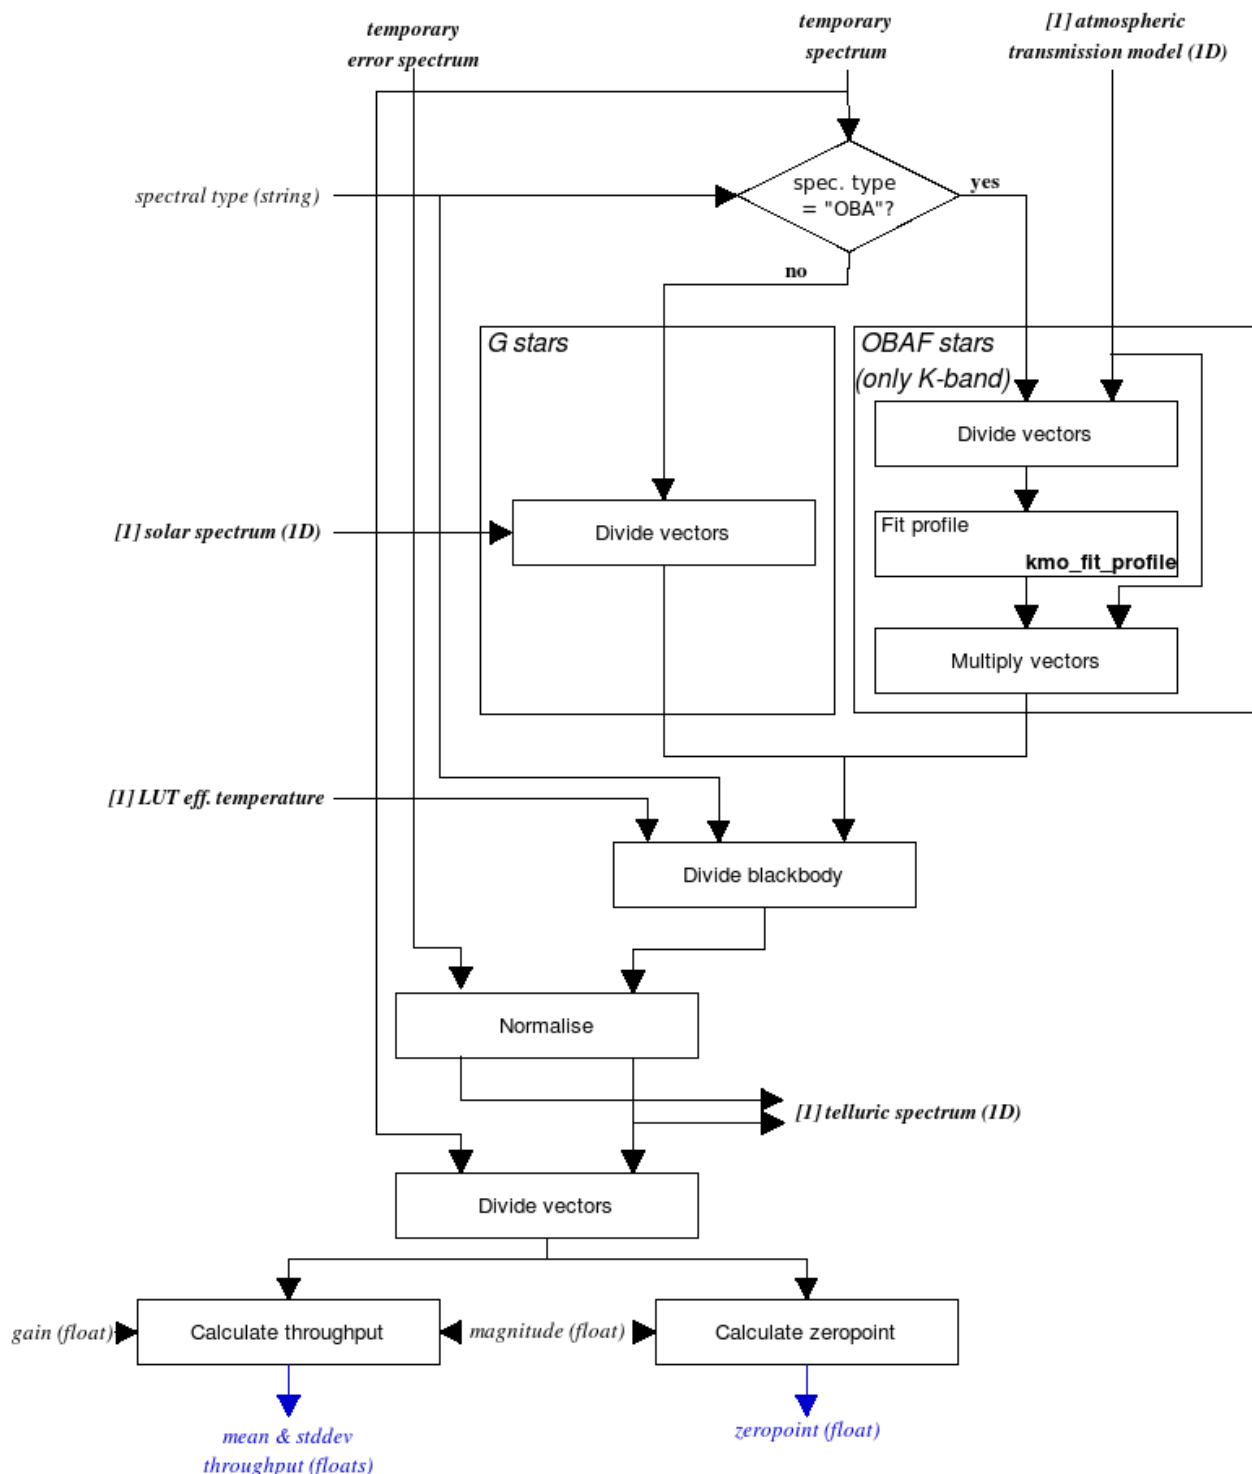

**Figure 33:** Flow chart of the recipe kmo\_std\_star (Part 2)

The processing steps are:

1. From one or more raw object and sky frames the IFUs containing observed standard stars are extracted.
2. The signal frame and the noise frame are reconstructed as cubes using a bad pixel mask (from `kmo_flat`), two spectral curvature calibration frames (from `kmo_flat`) and a wavelength calibration frame (from `kmo_wave_cal`). The corresponding IFU frames are also extracted from these auxiliary inputs.

3. The reconstructed cube is divided spatially by the spatial illumination correction frame.
  4. To the data cube for each spatial slice a 2D-profile is fitted to obtain the position of the object. The RMS of these values is saved as header keyword QC STD TRACE.
  5. The signal cube is collapsed to a spatial image. This results into an image of the PSF of the IFU.
  6. From the signal and the noise cubes the signal and error spectra are extracted. As a mask, the profile fit of the PSF image is used. This intermediate spectrum is saved as STAR\_SPEC.
  7. Two cases are distinguished in the further processing in function of the spectral type of the standard star observed:
    - a. OBAF stars
      - I. The temporary signal spectrum is divided by a model atmospheric transmission.
      - II. Fit a Lorentzian function to stellar absorption line(s) and subtract.
      - III. Multiply the model atmospheric transmission back in.
This applies only in K-band. For other bands a warning is emitted.
    - b. G stars
      - I. Convolve the solar spectrum to the correct spectral resolution and divide it out of the temporary signal spectrum.
  8. Divide the result by a curve corresponding to the effective temperature of the star.
  9. Normalising the spectrum (and also the error spectrum) yield the telluric correction and the final error spectrum.
  10. By dividing the temporary spectrum by the telluric correction and by providing the magnitude of the star and the gain of the detector (in fits header) two QC1 parameters can be calculated: the zeropoint and the throughput (mean and standard deviation).
- Above steps are repeated for all IFUs containing a standard star and a sky frame in the input data.

## 7.1.5.3 Input Frames

KMOS type	DO category	Amount	Comments
RAW	STD	$\geq 1$	Flat sky exposure
F2D	XCAL	1	Spatial calibration file
F2D	YCAL	1	Spatial calibration file
F2D	LCAL	1	Spectral calibration file
F2D	MASTER_FLAT	1	Master flat frame
F2L	WAVE_BAND	1	Table with start-/end-values of wavelengthrange
F2D	ILLUM_CORR	0,1	Illumination correction
F1S	SOLAR_SPEC	0,1	Solar spectrum (only for G stars)
F1S	ATMOS_MODEL	0,1	Atmospheric transmission model (only for OBAF stars in K-band)
F2L	SPEC_TYPE_LOOKUP	0,1	Look up table of effective stellar temperatures



### 7.1.5.4 Fits Header Keywords

#### **Primary Header**

None

#### **Sub Headers**

None

### 7.1.5.5 Configuration Parameters

#### **Basic parameters**

Name	Type	valid values	Default	Comments
<i>startype</i>	string	Star type: O, B, A, F, G, K Spectral class: 1 to 9 (K: only 0) Luminosity class: I to V (e.G. "G4VI")	""	The spectral type of the star ( <i>optional</i> )
<i>magnitude</i>	string	A single or two comma separated float values	""	The magnitude of the star ( <i>optional</i> )
<i>fmethod</i>	string	"gauss" or "moffat"	"gauss"	The 2D function to fit to the collapsed cube ( <i>optional</i> )
<i>imethod</i>	string	"NN" "lwNN" "swNN" "MS" "CS"	"CS"	Interpolation method for reconstruction: NN: Nearest Neighbor lwNN: linear weighted NN swNN: square weighted NN MS: Modified Shepard's method CS: Cubic spline ( <i>optional</i> )
<i>range</i>	string	"x1_start,x1_end; x2_start,x2_end"	""	The spectral ranges in microns to combine when collapsing the reconstructed cubes spectrally ( <i>optional</i> )
<i>save_cubes</i>	bool	TRUE, FALSE	FALSE	Save intermediate reconstructed cubes ( <i>optional</i> )

#### **Advanced parameters**

Name	Type	valid values	Default	Comments
<i>flux</i>	bool	TRUE, FALSE	FALSE	Apply flux conservation ( <i>optional</i> )
<i>neighborhoodRange</i>	double	$\geq 1$	1.001	Defines the range to search for neighbors during reconstruction ( <i>optional</i> )
<i>b_samples</i>	int	$b\_samples > 2$	2048	Nr. of samples of reconstructed data for the



				wavelength
<i>b_start</i> <i>b_end</i>	double	<i>b_start</i> > 0.0 <i>b_end</i> > <i>b_start</i>	-1.0	Start and end wavelength. The defaults of -1.0 instruct to use the internally defined range (see Section 6.3)
<i>cmethod</i>	string	"ksigma" "min_max" "average" "median" "sum"	"ksigma"	The averaging method to apply ( <i>optional</i> )
<i>cpos_rej</i> <i>cneg_rej</i>	double	<i>cpos_rej</i> ≥ 0, <i>cneg_rej</i> ≥ 0	3.0 3.0	The positive and negative rejection thresholds for bad pixels ( <i>optional, applies only when --cmethod = "ksigma"</i> )
<i>citer</i>	int	<i>citer</i> ≥ 1	3	The number of iterations for kappa-sigma-clipping. ( <i>optional, applies only when --cmethod = "ksigma"</i> )
<i>cmax</i> <i>cmin</i>	int	<i>cmax</i> ≥ 0 <i>cmin</i> ≥ 0	1 1	The number of maximum and minimum pixel values to clip with min/max-clipping ( <i>optional, applies only when --cmethod = "min_max"</i> )
<i>xcal interpolation</i>	bool	TRUE, FALSE	TRUE	( <i>optional</i> )
<i>suppress_extension</i>	bool	TRUE, FALSE	FALSE	( <i>optional</i> )

### 7.1.5.6 Output Frames

KMOS type	DO Category	Comments
F1I	TELLURIC	The normalised telluric spectrum [ADU/DIT]
F1I	STAR_SPEC	The extracted star spectrum [ADU/DIT]
F2I	STD_IMAGE	The standard star PSF
F2I	STD_MASK	The generated mask used to extract the star spectrum

### Additional Output

All recipes doing reconstruction of cubes create a LUT which by default is saved to disk. For further information see Sec. 6.4.

### 7.1.5.7 Examples

```
$ esorex kmo_std_star std.sof
                        with std.sof containing:
                        obj1.fits                      STD
```





obj2.fits	STD
obj13fits	STD
sky1.fits	STD
sky2.fits	STD
xcal_HHH.fits	XCAL
ycal_HHH.fits	YCAL
lcal_HHH.fits	LCAL
master_flat_HHH.fits	MASTER_FLAT
illum_corr_HHH.fits	ILLUM_CORR
kmos_wave_band.fits	WAVE_BAND
kmos_solar_h_2400.fits	SOLAR_SPEC
kmos_atmos_k.fits	ATMOS_MODEL
kmos_spec_type.fits	SPEC_TYPE_LOOKUP

## 7.2 Science Reduction Recipes

In this section two recipes are described which do in fact the same thing: reconstructing the data and combining the corresponding cubes. The way they do it differs significantly.

`kmo_sci_red` implements the straight approach, which is as well the standard one. First all the data frames are reconstructed and saved to disk. Then all data cubes are shifted and combined in a second step. In this recipe the data will be interpolated twice, during reconstruction and shifting.

`kmo_multi_reconstruct` implements an approach which requires only one interpolation step in order to get the final combined data. Therefore first all data frames are reconstructed to obtain the needed individual shift values. Then a big lookup table for every IFU is generated taking into account all values of all frames. Based on this big LUT the combined cube is reconstructed in one step without the need of shifting any data afterwards. The interpolation in this reconstruction step has a much broader data basis, because the data of all frames can be taken into account at once. Of course this recipe takes a longer time to execute because of the 2-step reconstruction.

### 7.2.1 `kmo_sci_red`: Processing for Science Data

Recipe name	used in recipe/function	uses recipe/function
<code>kmo_sci_red</code>	-	<code>kmo_noise_map</code> <code>kmo_reconstruct_sci</code> <code>kmo_arithmetic</code> <code>kmo_combine</code> <code>kmo_shift</code>

Reconstruct and combine data frames dividing illumination and telluric correction.

#### 7.2.1.1 Description

Ideally at least two data frames have to be provided since we need for each IFU pointing to an object as well a sky frame for the same IFU.

Every IFU containing an object will be reconstructed and divided by telluric and illumination correction, if provided. By default these intermediate cubes are saved to disk. Frames just containing skies won't produce an output here, so the number of output frames can be smaller than the number of input frames.

Then the reconstructed objects with the same object name are combined. These outputs are also saved to disk, the number of created files depends on the number of reconstructed objects of different name. If the user just wants to combine a certain object, the parameters `--name` or `--ifus` can be used.

For exposures taken with the templates `KMOS_spec_obs_mapping8` and `KMOS_spec_obs_mapping24` the recipe behaves a bit different: All active IFUs will be combined, regardless of the object names.

This recipe must be called after the `kmo_std_star`-recipe.

#### Basic parameters:

`--imethod`

The interpolation method used for reconstruction.

`--smethod`

The interpolation method used for shifting.

**Advanced parameters:**

`--flux`

Specify if flux conservation should be applied.

`--background`

Specify if background subtraction should be applied.

`--suppress_extension`

If set to TRUE, the arbitrary filename extensions are suppressed. If multiple products with the same category are produced, they will be numbered consecutively starting from 0

`--sky_tweak`

If set to TRUE sky subtraction is not done by subtracting the corresponding detector images but subtracting a modified sky cube from the object cube. It is not allowed that `--sky_tweak` and `--no_subtract` both are TRUE.

**Advanced reconstruction parameters:**

`--neighborhoodRange`

Defines the range to search for neighbors during reconstruction

`--b_samples`

The number of samples in spectral direction for the reconstructed cube. Ideally this number should be greater than 2048, the detector size.

`--b_start`

`--b_end`

Used to define manually the start and end wavelength for the reconstructed cube. By default the internally defined values are used (see Section 6.3).

`--fast_mode`

If set to TRUE, the reconstructed cubes will be collapsed (using median) and only then be shifted and combined.

`--pix_scale`

Change the pixel scale [arcsec]. Default of 0.2" results into cubes of 14x14pix, a scale of 0.1 results into cubes of 28x28pix, etc.

**Advanced combining parameters:**

`--edge_nan`

Set borders of two sides of the cubes to NaN before combining them. This minimises unwanted border effects when dithering.

`--no_combine`

If set to TRUE, the reconstructed cubes will not be combined.

`--no_subtract`

If set to TRUE, the found objects and references won't be sky subtracted. Additionally all IFUs will be reconstructed, even the ones containing skies. This option sets the parameter `no_combine` to TRUE automatically.

--name  
 --ifus

Since an object can be present only once per exposure and since it can be located in different IFUs for the existing exposures, there are two modes to identify the objects:

- Combine by object names (default)  
 In this case the object name must be provided via the `--name` parameter. The object name will be searched for in all primary headers of all provided frames in the keyword ESO OCS ARMx NAME.
- Combine by index (advanced)  
 In this case the `--ifus` parameter must be provided. The parameter must have the same number of entries as frames are provided, e.g. `"3;1;24"` for 3 exposures. The index doesn't reference the extension in the frame but the real index of the IFU as defined in the EXTNAME keyword (e.g. 'IFU.3.DATA').

--method

There are following sources to get the shift parameters from:

- header (default)  
 The shifts are calculated according to the WCS information stored in the header of every IFU. The output frame will get larger, except the object is at the exact same position for all exposures. The size of the exposures can differ, but the orientation must be the same for all exposures.
- none  
 The cubes are directly recombined, not shifting at all. The output frame will have the same dimensions as the input cubes.  
 If the size differs a warning will be emitted and the cubes will be aligned to the lower left corner. If the orientation differs a warning will be emitted, but the cubes are combined anyway.
- center  
 The shifts are calculated using a centering algorithm. The cube will be collapsed and a 2D profile will be fitted to it to identify the centre. With the parameter `--fmethod` the function to fit can be provided. The size of the exposures can differ, but the orientation must be the same for all exposures.
- user  
 Read the shifts from a user specified file. The path of the file must be provided using the `--filename` parameter. For every exposure (except the first one) two shift values are expected per line, they have to be separated with simple spaces. The values indicate pixel shifts and are referenced to the first frame. The 1<sup>st</sup> value is the shift in x-direction to the left, the 2<sup>nd</sup> the shift in y-direction upwards. The size of the exposures can differ, but the orientation must be the same for all exposures.

--fmethod

see `--method` = "center"

The type of function that should be fitted spatially to the collapsed image. This fit is used to create a mask to extract the spectrum of the object. Valid values are "gauss" and "moffat".



--filename  
see --method = "user"

--cmethod

Following methods of frame combination are available:

- **ksigma (default)**  
An iterative sigma clipping. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:  
$$\text{val} > \text{mean} + \text{stdev} * \text{cpos\_rej}$$
  
and  
$$\text{val} < \text{mean} - \text{stdev} * \text{cneg\_rej}$$
  
where --cpos\_rej, --cneg\_rej and --citer are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2).
- **median**  
At each pixel position the median is calculated.
- **average**  
At each pixel position the average is calculated.
- **sum**  
At each pixel position the sum is calculated.

## **min\_max**

The specified number of minimum and maximum pixel values will be rejected.

--cmax and --cmin apply to this method.

--cpos\_rej  
--cneg\_rej  
--citer  
see --cmethod = "ksigma"

--cmax  
--cmin  
see --cmethod = "min\_max"

--extrapolate

By default no extrapolation is applied. This means that the intermediate reconstructed cubes will shrink at most one pixel, which is ok for templates like KMOS\_spec\_obs\_nodtosky or KMOS\_spec\_obs\_freeditheir. When the cubes will be arranged as a map, a grid is likely to occur between the IFUs. Therefore extrapolation during the shifting process can be switched on in order to get IFUs of original size. For frames taken with mapping templates, extrapolation is switched on automatically.


--xcal\_interpolation

If TRUE interpolate the pixel position in the slitlet (xcal) using the two closest rotator angles in the calibration file. Otherwise take the values of the closest rotator angle.

### 7.2.1.2 Flow Chart

To simplify the flowchart the internal data organising workflow isn't depicted. All steps apply individually to each active IFU containing an object and a sky exposure.  
The reduced data and noise cube is stored in a similar manner as the input frames.

*[1..N] raw object + sky frames (2D)*

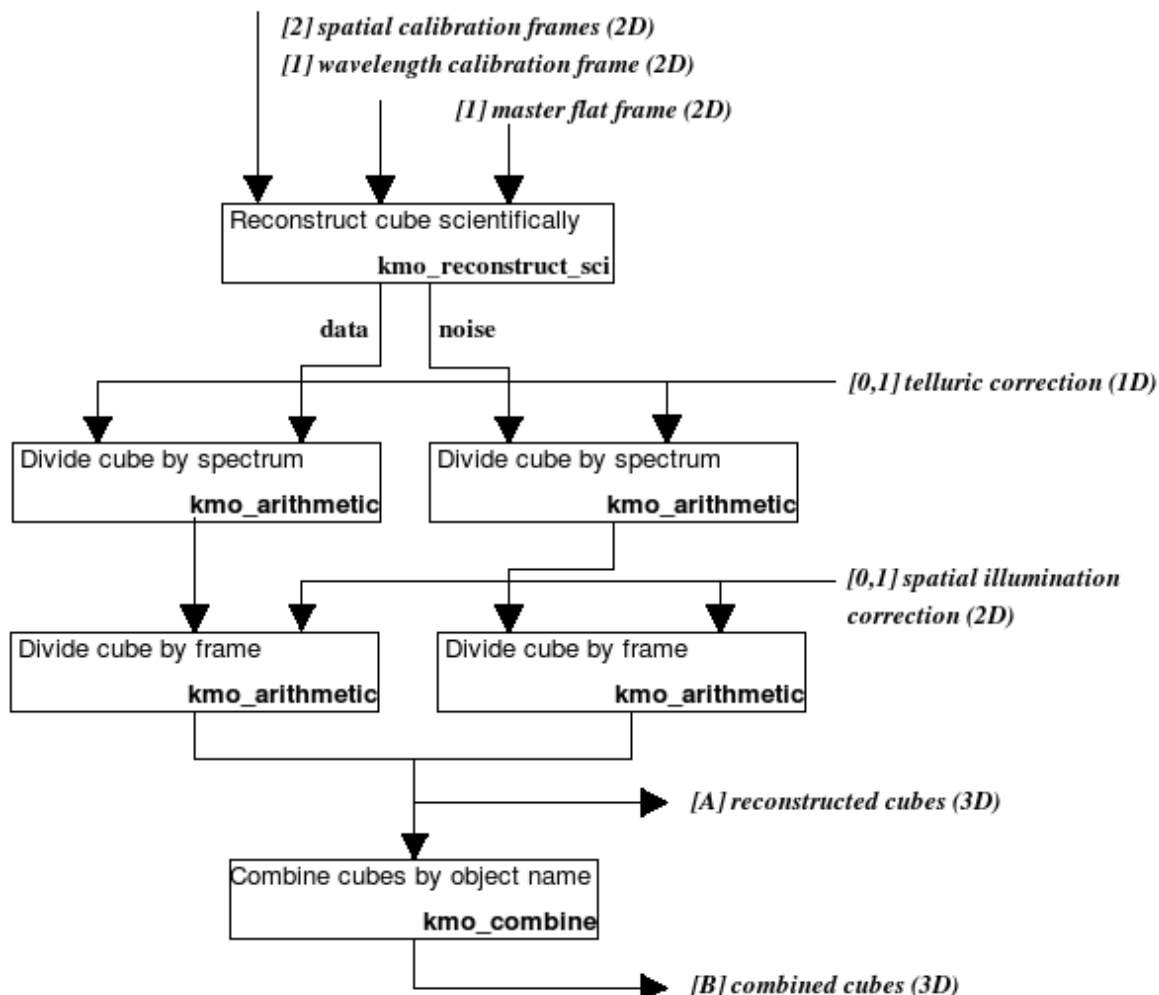

**Figure 34:** Flow chart of the recipe kmo\_sci\_red

The processing steps are:

1. The raw object is sky subtracted and reconstructed into a cube following the workflow explained in section 8.3.
2. The resulting data and noise cubes are divided by the telluric spectrum each.
3. Both data and noise cubes are divided spatially by the illumination correction.
4. Above steps are repeated for each IFU containing an object.

### 7.2.1.3 Input Frames

KMOS type	DO category	Amount	Comments
RAW	SCIENCE	$\geq 1$	The science frames
F2D	XCAL	1	Calibration frame 1 (from kmo_flat)
F2D	YCAL	1	Calibration frame 2



			(from kmo_flat)
F2D	LCAL	1	Calibration frame (from kmo_wave_cal)
F2D	MASTER_FLAT	1	(from kmo_flat)
F2L	WAVE_BAND	1	Table with start-/end-values of wavelengthrange
F2I	ILLUM_CORR	0,1	(from kmo_illumination)
F1I	TELLURIC	0,1	(from kmo_std_star)
F1S	OH_SPEC	0,1	OH reference spectrum

### 7.2.1.4 Fits Header Keywords

#### **Primary Header**

None

#### **Sub Headers**

None

### 7.2.1.5 Configuration Parameters

#### **Basic parameters**

Name	Type	valid values	Default	Comments
<i>imethod</i>	string	“NN” “lwNN” “swNN” “MS” “CS”	“CS”	Interpolation method: NN: Nearest Neighbor lwNN: linear weighted NN swNN: square weighted NN CM: Modified Shephard CS: cubic spline (optional)
<i>smethod</i>	string	“NN” “CS”	“CS”	Interpolation method: NN: Nearest Neighbor CS: cubic spline (optional)

#### **Advanced parameters**

Name	Type	valid values	Default	Comments
<i>flux</i>	bool	TRUE, FALSE	FALSE	Apply flux conservation
<i>background</i>	bool	TRUE, FALSE	FALSE	
<i>suppress_extension</i>	bool	TRUE, FALSE	FALSE	
<i>sky_tweak</i>	bool	TRUE, FALSE	FALSE	Use modified sky cube for sky subtraction
<i>neighborhoodRange</i>	double	$\geq 1$	1.001	Defines the range to search for neighbors
<i>b_samples</i>	int	$b\_samples > 2$	2048	Nr. of samples of reconstructed data for the wavelength
<i>b_start</i> <i>b_end</i>	double	$b\_start > 0.0$ $b\_end > b\_start$	-1.0	Start and end wavelength. The defaults of -1.0 instruct to use the internally defined



				range (see Section 6.3)
<i>fast_mode</i>	bool	TRUE, FALSE	FALSE	TRUE if cubes should be collapsed before combining
<i>pix_scale</i>	double	TRUE, FALSE	0.2	The pixel scale: 0.2 arcsec results in cubes of 14x14 pixels. 0.1 arcsec result in cubes of 28x28 pixels
<i>edge_nan</i>	bool	TRUE, FALSE	FALSE	Set two sides of the cubes to NaN
<i>no_combine</i>	bool	TRUE, FALSE	FALSE	Don't combine cubes
<i>no_subtract</i>	bool	TRUE, FALSE	FALSE	Don't subtract cubes
<i>name</i>	string	any	""	Name of the object to combine as defined in the keyword ESO OCS ARMi NAME (if this parameter is set, the --ifus parameter can't be set)
<i>ifus</i>	string	"ifu1;ifu2;..."	""	The indices of the IFUs to combine. The number of entries has to match the number of input frames (if this parameter is set, the --name parameter can't be set)
<i>method</i>	string	"none" "header" "center" "user"	"header"	The shifting method
<i>fmethod</i>	string	"gauss" or "moffat"	"gauss"	The 2D function to fit to the collapsed cube
<i>filename</i>	string	any	""	The path to the file with the shift vectors. (applies only to --method = "user")
<i>cmethod</i>	string	"ksigma" "min_max" "average" "median" "sum"	"ksigma"	The averaging method to apply (optional)
<i>cpos_rej</i> <i>cneg_rej</i>	double	$cpos\_rej \geq 0$ , $cneg\_rej \geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels (optional, applies only when -cmethod = "ksigma")
<i>citer</i>	int	$citer \geq 1$	3	The number of iterations for kappa-sigma-clipping. (optional, applies only when -cmethod = "ksigma")
<i>cmax</i> <i>cmin</i>	int	$cmax \geq 0$	1 1	The number of maximum and minimum pixel values to clip





		$\text{cmin} \geq 0$		with min/max-clipping (optional, applies only when - -cmethod = "min max")
<i>extrapolate</i>	bool	TRUE, FALSE	FALSE	FALSE: shifted IFU will be filled with NaNs at the borders TRUE: shifted IFU will be extrapolated at the borders (optional, applies only when smethod=CS and doing sub pixel shifts)
<i>xcal interpolation</i>	bool	TRUE, FALSE	TRUE	(optional)

### 7.2.1.6 Output Frames

KMOS type	DO Category	Comments
F3I	SCI_COMBINED	Combined cubes with noise
F3I	SCI_RECONSTRUCTED	Reconstructed cubes

### 7.2.1.7 Examples

```
$ esorex kmo_sci_red reduce.sof
```

with reduce.sof containing:

```
science 1.fits          SCIENCE
science 2.fits          SCIENCE
science 3.fits          SCIENCE
master_flat_HHH.fits    FLAT
xcal_HHH.fits           XCAL
ycal_HHH.fits           YCAL
lcal_HHH.fits           LCAL
kmos_wave_band.fits     WAVE_BAND
illum_corr_HHH.fits     ILLUM_CORR
telluric_HHH.fits       TELLURIC
```

## 7.2.2 **kmo\_multi\_reconstruct:** **Reconstruct and combine cubes in one processing step**

Recipe name	used in recipe/function	uses recipe/function
kmo_multi_reconstruct	-	kmo_noise_map kmo_reconstruct_sci kmo_arithmetic kmo_combine kmo_shift

Reconstruct and combine cubes in one processing step.

### 7.2.2.1 **Description**

This recipe shifts several exposures of an object and combines them. The different methods to match the exposures are described below (`--smethod` parameter).

The output cube is larger than the input cubes, according to the shifts to be applied. Additionally a border of NaN values is added. The WCS is the same as for the first exposure.

For each spatial/spectral pixel a new value will be calculated (according the `--cmethod` parameter) and written into the output cube.

Only exposures with equal orientation regarding the WCS can be combined (except `--smethod="none"`), north must point to the same direction. It is recommended to apply any rotation possibly after combining.

The default mapping mode is done via the `--name` parameter, where the name of the object has to be provided. The recipe searches in all input data cubes IFUs pointing to that object.

#### **Basic parameters:**

`--name`  
`--ifus`

Since an object can be present only once per exposure and since it can be located in different IFUs for the existing exposures, there are two modes to identify the objects:

- **Combine by object names (default)**  
In this case the object name must be provided via the `--name` parameter. The object name will be searched for in all primary headers of all provided frames in the keyword ESO OCS ARMx NAME.
- **Combine by index (advanced)**  
In this case the `--ifus` parameter must be provided. The parameter must have the same number of entries as frames are provided, e.g. `"3;1;24"` for 3 exposures. The index doesn't reference the extension in the frame but the real index of the IFU as defined in the EXTNAME keyword (e.g. 'IFU.3.DATA').

`--imethod`

Method to use for interpolation (NN, lwNN, swNN, MS or CS).

`--smethod`

There are following sources to get the shift parameters from:

- **header (default)**  
The shifts are calculated according to the WCS information stored in the header of every

IFU. The output frame will get larger, except the object is at the exact same position for all exposures. The size of the exposures can differ, but the orientation must be the same for all exposures.

- none  
The cubes are directly recombined, not shifting at all. The output frame will have the same dimensions as the input cubes.  
If the size differs a warning will be emitted and the cubes will be aligned to the lower left corner. If the orientation differs a warning will be emitted, but the cubes are combined anyway.
- center  
The shifts are calculated using a centering algorithm. The cube will be collapsed and a 2D profile will be fitted to it to identify the centre. With the parameter `--fmethod` the function to fit can be provided. The size of the exposures can differ, but the orientation must be the same for all exposures.
- user  
Read the shifts from a user specified file. The path of the file must be provided using the `--filename` parameter. For every exposure (except the first one) two shift values are expected per line, they have to be separated with simple spaces. The values indicate pixel shifts and are referenced to the first frame. The 1<sup>st</sup> value is the shift in x-direction to the left, the 2<sup>nd</sup> the shift in y-direction upwards. The size of the exposures can differ, but the orientation must be the same for all exposures.

### **Advanced parameters:**

`--size`

Spatial size of the output cube.

`--suppress_extension`

If set to TRUE, the arbitrary filename extensions are suppressed. If multiple products with the same category are produced, they will be numbered consecutively starting from 0

`--fmethod`

see `--smethod = "center"`

The type of function that should be fitted spatially to the collapsed image. This fit is used to create a mask to extract the spectrum of the object. Valid values are "gauss" and "moffat".

`--filename`

see `--smethod = "user"`

### **Advanced reconstruction parameters:**

`--pix_scale`

Change the pixel scale [arcsec]. Default of 0.2" results into cubes of 14x14pix, a scale of 0.1 results into cubes of 28x28pix, etc.

`--neighborhoodRange`

Defines the range to search for neighbors during reconstruction

`--b_samples`

The number of samples in spectral direction for the reconstructed cube. Ideally this number should be greater than 2048, the detector size.

```
--b_start
--b_end
```

Used to define manually the start and end wavelength for the reconstructed cube. By default the internally defined values are used (see Section 6.3).

### Advanced combining parameters:

```
--cmethod
```

Following methods of frame combination are available:

- **ksigma (default)**  
 An iterative sigma clipping. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:  

$$val > mean + stdev * cpos\_rej$$
 and  

$$val < mean - stdev * cneg\_rej$$
 where `--cpos_rej`, `--cneg_rej` and `--citer` are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2).
- **median**  
 At each pixel position the median is calculated.
- **average**  
 At each pixel position the average is calculated.
- **sum**  
 At each pixel position the sum is calculated.

### **min\_max**

The specified number of minimum and maximum pixel values will be rejected.

`--cmax` and `--cmin` apply to this method.


```
--cpos_rej
--cneg_rej
--citer
```

see `--cmethod = "ksigma"`

```
--cmax
--cmin
```

see `--cmethod = "min_max"`

### 7.2.2.2 Flow Chart

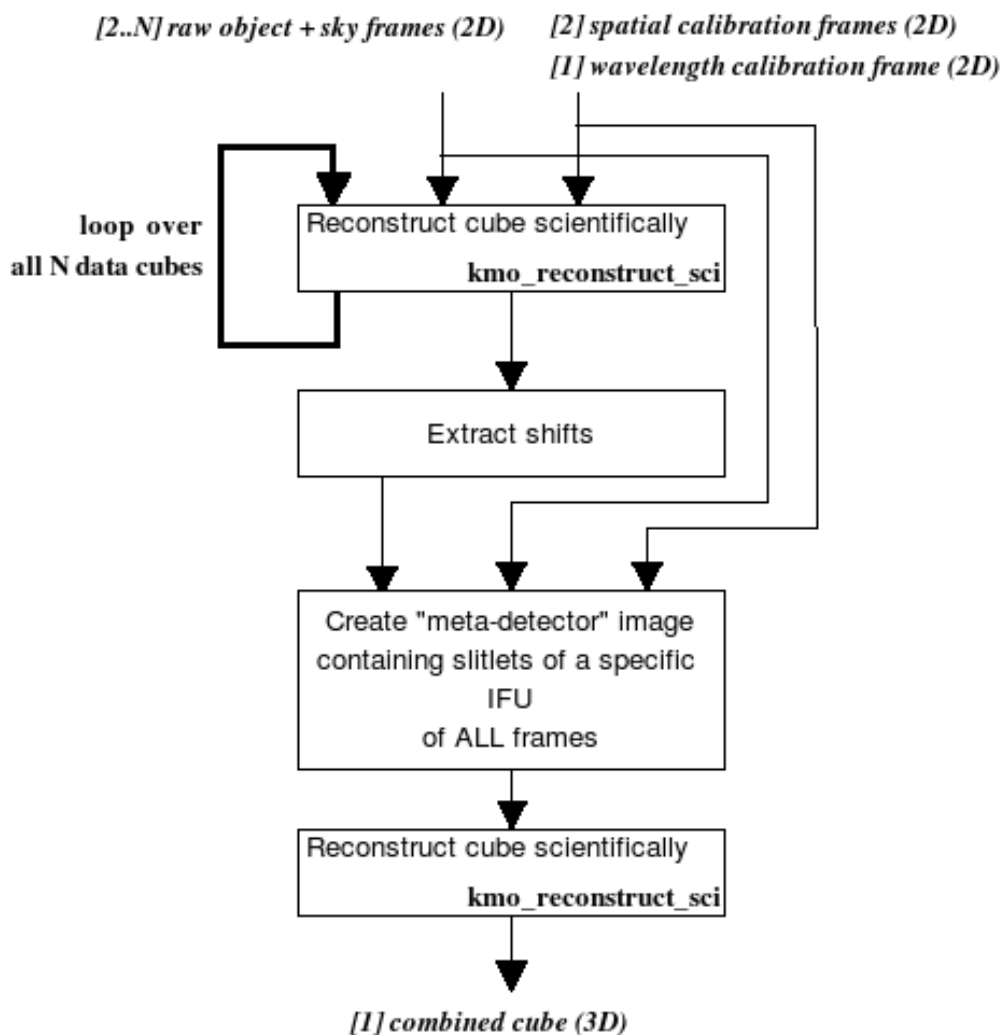

**Figure 35:** Flow chart of the recipe kmo\_sci\_red

The processing steps are:

1. All specified IFUs (either by number or object name) are reconstructed on all raw input frames
2. Depending on the shifting method the shifts of the IFUs are calculated
3. Then a “meta-detector” image is generated where all slitlets of all specified IFUs are arranged one next to the other. The same procedure is applied to the same sections of the calibration frames
4. The “super” images are now reconstructed directly resulting into the desired output data cube.

### 7.2.2.3 Input Frames

KMOS type	DO category	Amount	Comments
RAW	SCIENCE	$\geq 2$	The science frames
F2D	XCAL	1	Calibration frame 1 (from kmo_flat)
F2D	YCAL	1	Calibration frame 2

			(from kmo_flat)
F2D	LCAL	1	Calibration frame (from kmo_wave_cal)
F2L	WAVE_BAND	1	Table with start-/end-values of wavelengthrange

## 7.2.2.4 Fits Header Keywords

### Primary Header

None

### Sub Headers

None

## 7.2.2.5 Configuration Parameters

### Basic parameters

Name	Type	valid values	Default	Comments
name	string	any	""	Name of the object to combine as defined in the keyword ESO OCS ARMi NAME (if this parameter is set, the --ifus parameter can't be set)
ifus	string	"ifu1;ifu2;..."	""	The indices of the IFUs to combine. The number of entries has to match the number of input frames (if this parameter is set, the --name parameter can't be set)
imethod	string	"NN" "lwNN" "swNN" "MS" "CS"	"NN"	Interpolation method: NN: Nearest Neighbor lwNN: linear weighted NN swNN: square weighted NN CM: Modified Shephard CS: cubic spline (optional)
smethod	string	"none" "header" "center" "user"	"none"	The shifting method

### Advanced parameters

Name	Type	valid values	Default	Comments
size	string	std, max	max	
suppress_extension	bool	TRUE, FALSE	FALSE	
fmethod	string	"gauss" or "moffat"	"gauss"	The 2D function to fit to the collapsed cube
filename	string	any	""	The path to the file with the



				shift vectors. ( <i>applies only to</i> <i>--smethod = "user"</i> )
<i>pix_scale</i>	double	TRUE, FALSE	0.2	The pixel scale: 0.2 arcsec results in cubes of 14x14 pixels. 0.1 arcsec result in cubes of 28x28 pixels
<i>neighborhoodRange</i>	double	$\geq 1$	1.001	Defines the range to search for neighbors
<i>b_samples</i>	int	$b\_samples > 2$	2048	Nr. of samples of reconstructed data for the wavelength
<i>b_start</i> <i>b_end</i>	double	$b\_start > 0.0$ $b\_end > b\_start$	-1.0	Start and end wavelength. The defaults of -1.0 instruct to use the internally defined range (see Section 6.3)
<i>cmethod</i>	string	"ksigma" "min_max" "average" "median" "sum"	"ksigma"	The averaging method to apply ( <i>optional</i> )
<i>cpos_rej</i> <i>cneg_rej</i>	double	$cpos\_rej \geq 0$ , $cneg\_rej \geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels ( <i>optional, applies only when -cmethod = "ksigma"</i> )
<i>citer</i>	int	$citer \geq 1$	3	The number of iterations for kappa-sigma-clipping. ( <i>optional, applies only when -cmethod = "ksigma"</i> )
<i>cmax</i> <i>cmin</i>	int	$cmax \geq 0$ $cmin \geq 0$	1 1	The number of maximum and minimum pixel values to clip with min/max-clipping ( <i>optional, applies only when -cmethod = "min_max"</i> )

### 7.2.2.6 Output Frames

KMOS type	DO Category	Comments
F3I	CUBE_MULTI	Combined cubes with noise

### 7.2.2.7 Examples

```
$ esorex kmo_multi_reconstruct reduce.sof
    with reduce.sof containing:
    science1.fits          SCIENCE
    science2.fits          SCIENCE
    science3.fits          SCIENCE
    xcal_HHH.fits          XCAL
    ycal_HHH.fits          YCAL
```



lcal\_HHH.fits

LCAL

kmos\_wave\_band.fits

WAVE\_BAND



## 7.3 Common Recipes

### 7.3.1 kmo\_arithmetic: Basic Arithmetic

Recipe name	used in recipe/function	uses recipe/function
kmo_arithmetic	kmo_std_star kmo_sci_red kmo_rtd_image kmo_bkg_sub kmo_sky_tweak	-

Perform basic arithmetic on cubes.

#### 7.3.1.1 Description

With this recipe simple arithmetic operations, like addition, subtraction, multiplication, division and raising to a power can be performed.

Since FITS files formatted as F1I, F2I and F3I can contain data (and eventually noise) of either just one IFU or of all 24 IFUs, kmo\_arithmetic behaves differently in these cases.

When the number of IFUs is the same for both operands, the first IFU of the first operand is processed with the first IFU of the second operand.

When the second operand has only one IFU while the first operand has more IFUs, then all the IFUs of the first operand are processed individually with the IFU of the second operand.

If an operand contains noise and the other doesn't, the noise will not be processed.

Noise is only propagated if both operands contain noise extensions. If the second operand is a scalar noise is also propagated, of course.

If two cubes are given as operands, they will be combined according to the given operator. If a cube is given as first operand and an image as second, then it operates on each slice of the cube; similarly if a spectrum is given as the second operand, it operates on each spectrum of the cube; and a number as the second operand operates on each pixel of the cube.

#### Basic parameters:

--operator

Any of the following operations to perform: "+", "-", "\*", "/" (also "^" when the 2<sup>nd</sup> operand is a scalar)


--scalar

To be provided if a frame should be processed together with a scalar

--file\_extension

Define a string to append to the product filename ARITHMETIC in order to get a unique filename

### 7.3.1.2 Flow Chart

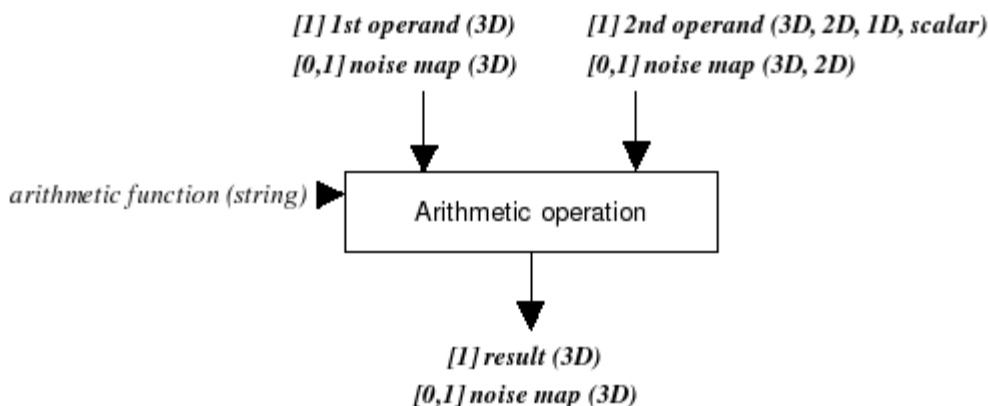

**Figure 36:** Flow chart of the recipe kmo\_arithmetic

The processing steps are:

1. Two operands are combined according to the arithmetic function given (+, -, /, \*).
2. The first operand is always a 3D fits frame, the second operand can have different dimensions:
  - a. 3D: The cubes are combined normally as described above.
  - b. 2D: The image operates on each spatial slice of the first cube.
  - c. 1D: The spectrum operates on each spectrum of the first cube.
  - d. scalar: The number operates on each pixel in the first cube.
3. Optionally noise maps can be provided for each operand. If done so, they will be combined according to the operation applied to the data (see also section 2.2.2).

### 7.3.1.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I, F2I, F1I, F2D or RAW	none or any	1	data frame, with or without noise
F3I, F2I, F1I, F2D or RAW	none or any	0, 1	data frame, with or without noise (optional)

This recipe also accepts also a path to a FITS file instead of a sof-file when calculating with a scalar.

### 7.3.1.4 Fits Header Keywords

None specific

### 7.3.1.5 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
operator	string	"+", "-", "*", "/", "^"	""	(mandatory)
scalar	double	any	-DBL_MAX	(mandatory, if only one file is supplied)
file_extension	string	any	""	(optional)



### 7.3.1.6 Output Frames

KMOS type	DO Category	Comments
F3I or	ARITHMETIC	1 <sup>st</sup> operator is F3I and 2 <sup>nd</sup> one is either F3I, F2I, F1I or scalar
F2I or		1 <sup>st</sup> operator is F2I and 2 <sup>nd</sup> one is either F2I, F1I or scalar
F1I or		1 <sup>st</sup> operator is F1I and 2 <sup>nd</sup> one is either F1I or scalar
F2D		1 <sup>st</sup> operator is F2D and 2 <sup>nd</sup> one is either F2D or scalar or 1 <sup>st</sup> operator is RAW and 2 <sup>nd</sup> one is either RAW or scalar

### 7.3.1.7 Examples

```
$ esorex kmo_arithmetic --operator="*" --scalar=9.7 F3I.fits  
  
$ esorex kmo_arithmetic --operator="^" --scalar=9.7 F2D.fits  
  
$ esorex kmo_arithmetic --operator="+" F3I_1.fits F3I_2.fits  
  
$ esorex kmo_arithmetic --operator="/" --ifu=4 F3I_F2I.sof  
  with F3I_F2I.sof containing:  
  F3I.fits  
  F2I.fits
```

### 7.3.2 **kmo\_combine:** **Combining Cubes**

Recipe name	used in recipe/function	uses recipe/function
kmo_combine	kmo_sci_red	kmo_make_image kmo_fit_profile kmo_shift kmclipm_combine_frames

Combine cubes spatially.

#### 7.3.2.1 **Description**

This recipe shifts several exposures of an object and combines them. The different methods to match the exposures are described below (`--method` parameter). The output cube is larger than the input cubes, according to the shifts to be applied. Additionally a border of NaN values is added. The WCS is the same as for the first exposure.

For each spatial/spectral pixel a new value will be calculated (according the `--cmethod` parameter) and written into the output cube.

Only exposures with equal orientation regarding the WCS can be combined (except `--method="none"`), north must point to the same direction. It is recommended to apply any rotation possibly after combining.

The behavior of the selection of IFUs to combine differs for some templates and can be controlled with the parameters `--name` and `--ifus`.

If the input data cubes stem from templates `KMOS_spec_obs_mapping8` or `KMOS_spec_obs_mapping24` all extensions from all input frames are combined into a single map by default (like in recipe `kmo_sci_red`). If just the area of a specific IFU should be combined, the parameter `--ifus` can be specified, or more easily `--name`.

If the input data cubes stem from other templates like e.g. `KMOS_spec_obs_freedit` all extensions of all input frames are combined into several output frames by default. The input IFUs are grouped according their targeted object name stored in the keywords `ESO OCS ARMx NAME`. If just a specific object should be combined, its name can be specified with parameter `--name`. If arbitrary IFUs should be combined, one can specify these with the parameter `--ifus`.

The default mapping mode is done via the `--name` parameter, where the name of the object has to be provided. The recipe searches in all input data cubes IFUs pointing to that object.

#### **Basic parameters:**

`--name`  
`--ifus`

Since an object can be present only once per exposure and since it can be located in different IFUs for the existing exposures, there are two modes to identify the objects:

- Combine by object names (default)  
In this case the object name must be provided via the `--name` parameter. The object name will be searched for in all primary headers of all provided frames in the keyword `ESO OCS ARMx NAME`.

- Combine by index (advanced)

In this case the `--ifus` parameter must be provided. The parameter must have the same number of entries as frames are provided, e.g. `"3;1;24"` for 3 exposures. The index doesn't reference the extension in the frame but the real index of the IFU as defined in the EXTNAME keyword (e.g. 'IFU.3.DATA').

## `--method`

There are following sources to get the shift parameters from:

- none (default)

The cubes are directly recombined, not shifting at all. The output frame will have the same dimensions as the input cubes.

If the size differs a warning will be emitted and the cubes will be aligned to the lower left corner. If the orientation differs a warning will be emitted, but the cubes are combined anyway.

- header

The shifts are calculated according to the WCS information stored in the header of every IFU. The output frame will get larger, except the object is at the exact same position for all exposures. The size of the exposures can differ, but the orientation must be the same for all exposures.

- center

The shifts are calculated using a centering algorithm. The cube will be collapsed and a 2D profile will be fitted to it to identify the centre. With the parameter `--fmethod` the function to fit can be provided. The size of the exposures can differ, but the orientation must be the same for all exposures.

- user

Read the shifts from a user specified file. The path of the file must be provided using the `--filename` parameter. For every exposure (except the first one) two shift values are expected per line, they have to be separated with simple spaces. The values indicate pixel shifts and are referenced to the first frame. The 1<sup>st</sup> value is the shift in x-direction to the left, the 2<sup>nd</sup> the shift in y-direction upwards. The size of the exposures can differ, but the orientation must be the same for all exposures.

## `--cmethod`

Following methods of frame combination are available:

- ***ksigma (default)***

An iterative sigma clipping. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:

$$val > mean + stdev * cpos\_rej$$

and

$$val < mean - stdev * cneg\_rej$$

where `--cpos_rej`, `--cneg_rej` and `--citer` are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2).

- **median**

At each pixel position the median is calculated.

- **average**

At each pixel position the average is calculated.

- **sum**

At each pixel position the sum is calculated.

- **min\_max**

The specified number of minimum and maximum pixel values will be rejected.

--cmax and --cmin apply to this method.

**Advanced parameters:**

--edge\_nan

Set borders of two sides of the cubes to NaN before combining them. This minimises unwanted border effects when dithering

--fmethod

see --method = "center"

The type of function that should be fitted spatially to the collapsed image. This fit is used to create a mask to extract the spectrum of the object. Valid values are "gauss" and "moffat".

--filename

see --method = "user"

--cpos\_rej

--cneg\_rej

--citer

see --cmethod = "ksigma"

--cmax

--cmin

see --cmethod = "min\_max"


--flux

Specify if flux conservation should be applied

--suppress\_extension

If set to TRUE, the arbitrary filename extensions are suppressed. If multiple products with the same category are produced, they will be numbered consecutively starting from 0

### 7.3.2.2 Flow Chart

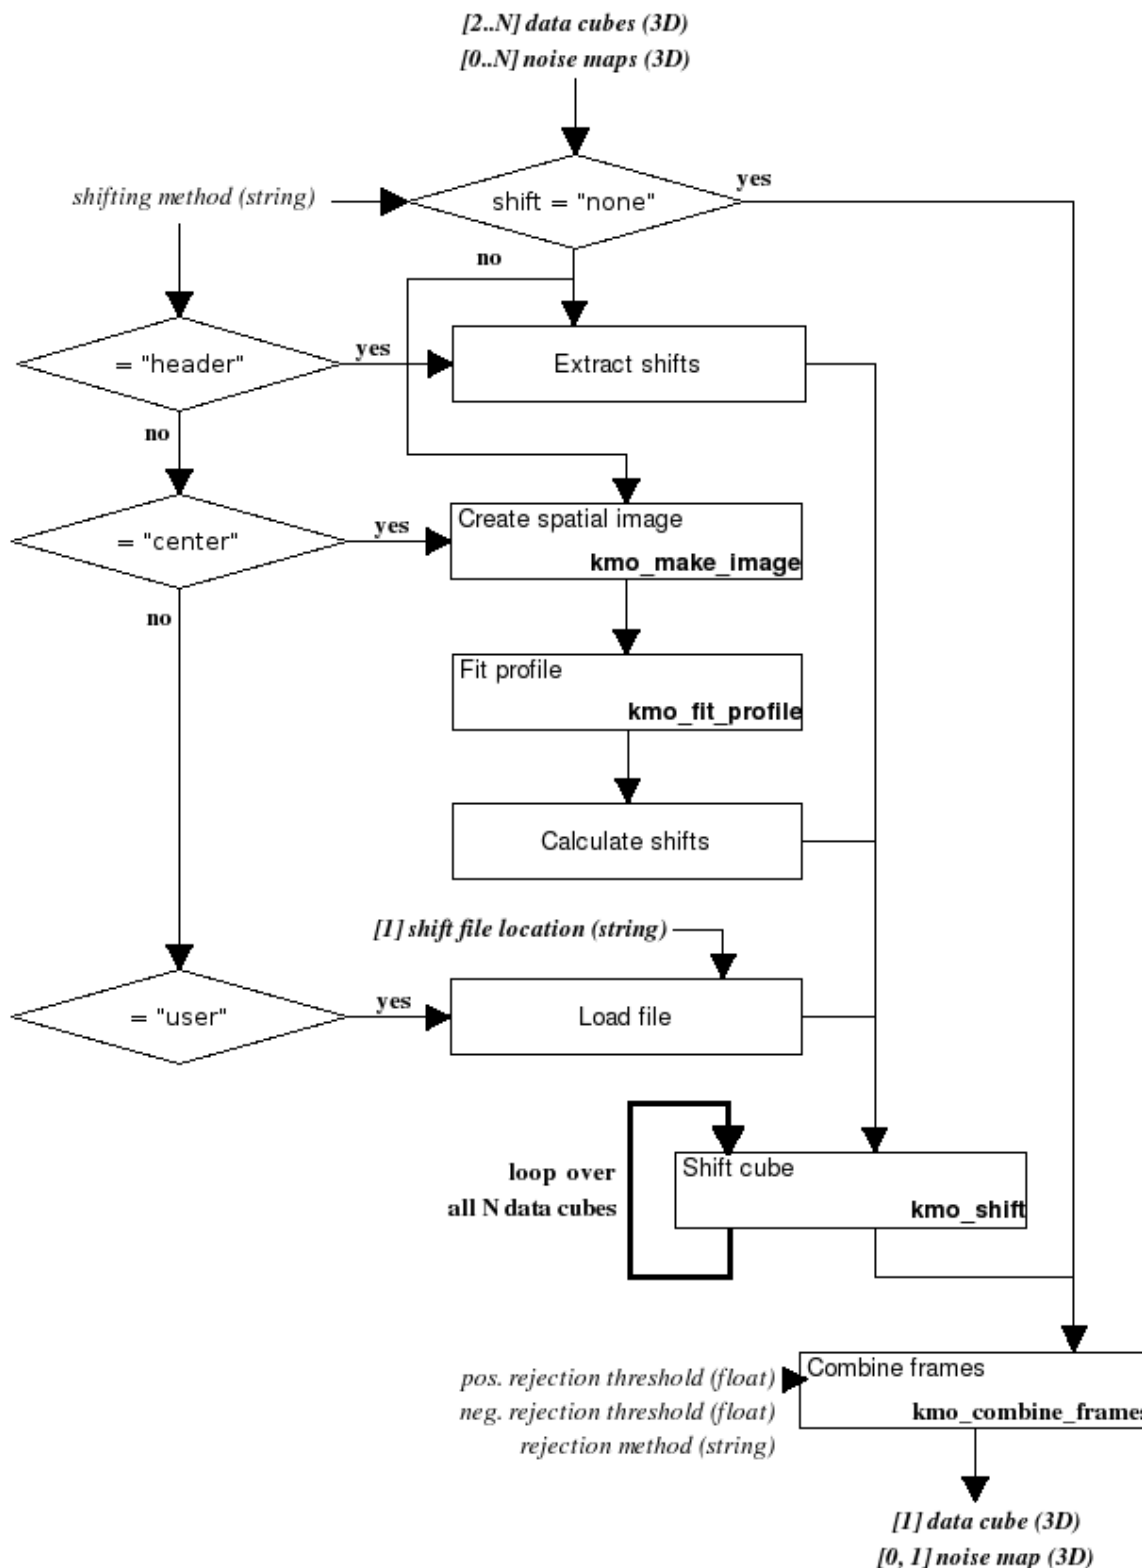

**Figure 37:** Flow chart of the recipe kmo\_combine

The processing steps are:

1. The actions taken depend on the shifting method:
  - a. “none”: Since no shifting is wanted the data and noise is directly propagated.

- b. “header”: The shift information is extracted from the fits file headers of the data cubes. All shifts are relative to the first cube in the list.
- c. “center”: The shifts are calculated using a centering algorithm. First the cubes are collapsed spatially, then a profile will be fit to find the centre of the object.
- d. “user”: The user provides a file with stored shift information, relative to the first cube in the list.

2. The actual shift is executed now.

The data cubes and corresponding noise maps are combined using rejection.

## 7.3.2.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I	any	$\geq 1$	any F3I data frames, the DO category is propagated to the output

## 7.3.2.4 Fits Header Keywords

### Primary Header

Keyword	Type	Value	Comments
MINDIT	double	~2.5	Estimated value
NDIT	Int	1	
EXPTIME	double	any	

### Sub Headers

Keyword	Type	Value	Comments
CRPIX1, CRPIX2, CRPIX3	double	any	all frames
CRVAL1, CRVAL2, CRVAL3	double	any	all frames
CDELTA1, CDELTA2, CDELTA3	double	any	all frames
CD1_1, CD1_2, CD2_1 CD2_2	double	any	all frames

## 7.3.2.5 Configuration Parameters

### Basic parameters

Name	Type	valid values	Default	Comments
name	string	any	“”	Name of the object to combine as defined in the keyword ESO OCS ARMi NAME (if this parameter is set, the --ifus parameter can't be set)
ifus	string	"ifu1;ifu2;..."	“”	The indices of the IFUs to combine. The number of entries has to match the





				number of input frames (if this parameter is set, the <code>--name</code> parameter can't be set
method	string	"none" "header" "center" "user"	"none"	The shifting method
cmethod	string	"ksigma" "min_max" "average" "median" "sum"	"ksigma"	The averaging method to apply (optional)

## Advanced parameters

Name	Type	valid values	Default	Comments
<code>edge_nan</code>	bool	TRUE, FALSE	FALSE	
<code>fmethod</code>	string	"gauss" or "moffat"	"gauss"	The 2D function to fit to the collapsed cube
filename	string	any	"	The path to the file with the shift vectors. (applies only to <code>--method = "user"</code> )
cpos_rej cneg_rej	double	cpos_rej $\geq 0$ , cneg_rej $\geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels (optional, applies only when <code>--cmethod =</code> "ksigma")
citer	int	citer $\geq 1$	3	The number of iterations for kappa-sigma-clipping. (optional, applies only when <code>--cmethod =</code> "ksigma")
cmax cmin	int	cmax $\geq 0$ cmin $\geq 0$	1 1	The number of maximum and minimum pixel values to clip with min/max- clipping (optional, applies only when <code>--cmethod =</code> "min_max")
flux	bool	TRUE, FALSE	FALSE	
suppress_extension	bool	TRUE, FALSE	FALSE	

## 7.3.2.6 Output Frames

KMOS type	DO Category	Comments
F3I	COMBINE_<ESO PRO CATG>_<name> or COMBINE_<ESO PRO CATG>_<ifu> or	The keyword "ESO PRO CATG" is appended



COMBINE <ESO PRO CATG> mapping
--------------------------------

## 7.3.2.7 Examples

```
$ esorex kmo_combine -name="NGC_150" combine.sof
```

```
with combine.sof containing:  
fits1_NGC_150_in_ifu_2.fits  
fits2_NGC_150_in_ifu_17.fits  
fits3_NGC_150_in_ifu_9.fits
```

### 7.3.3 **kmo\_copy:** **Copy Cube Sections**

Recipe name	used in recipe/function	uses recipe/function
kmo_copy	kmo_extract_pv	-

Copy a section of a cube to another cube, image or spectrum.

#### 7.3.3.1 **Description**

With this recipe a specified region of an IFU-based cube (F3I), image (F2I) or vector (F1I) can be copied to a new FITS file. One can copy just a plane out of a cube (any orientation) or a vector out of an image etc. By default the operation applies to all IFUs. The input data can contain noise frames which is then copied in the same manner as the input data.

It is also possible to extract a specific IFU out of a KMOS FITS structure with 24 IFU extensions or 48 extensions if noise is present (see example in 7.3.3.7).

#### **Basic parameters:**

--ifu

Use this parameter to apply the operation to a specific IFU.

--x

--y

--z

These are the start values in each dimension. The first pixel is addressed with 1.

--xsize

--ysize


--zsize

These are the extents in each dimension to copy.

--autocrop

If set to TRUE all borders containing NaN values are cropped. Vectors will be shortened, images and cubes can get smaller. In this special case following parameters can be omitted: --x, --y, --z, --xsize, --ysize and --zsize.

#### 7.3.3.2 **Flow Chart**

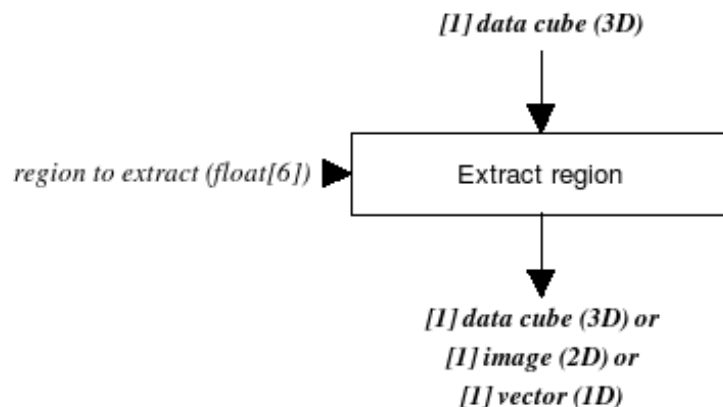

**Figure 38:** Flow chart of the recipe kmo\_copy

The specified range (in all dimensions) of the input data is copied and returned. If the specified ranges in one or two dimensions are reduced to a single value, then an image or a vector will be returned, respectively.

### 7.3.3.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I or F2I or F1I	none or any	1	data frame, with or without noise

This recipe also accepts also a path to a FITS file instead of a sof-file.

### 7.3.3.4 Fits Header Keywords

None specific

### 7.3.3.5 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
<i>ifu</i>	int	$1 \leq ifu \leq \text{NEXTEND}$	-1	<i>optional</i> If ifu is specified, the recipe operates only on the specified IFU.
<i>x, y, z</i>	int	$1 \leq x \leq \text{NAXIS1}$ $1 \leq y \leq \text{NAXIS2}$ $1 \leq z \leq \text{NAXIS3}$	1	<i>(mandatory if autocrop isn't set)</i>
<i>xsize, ysize, zsize</i>	int	$1 < xsize \leq \text{NAXIS1}-x$ $1 < ysize \leq \text{NAXIS2}-y$ $1 < zsize \leq \text{NAXIS3}-z$	1	<i>(optional)</i> If one or more of these are omitted, a plane, a vector or a scalar is extracted. A scalar is returned in a vector of size 1.
<i>autocrop</i>	bool	TRUE, FALSE	FALSE	<i>optional</i> If set to TRUE, <i>x, y, z, xsize, ysize</i> and <i>zsize</i> are ignored.

### 7.3.3.6 Output Frames

KMOS type	DO Category	Comments
F3I	COPY	for F3I as input and <i>x, y, z, xsize, ysize, zsize</i> defined
KMOS type	DO Category	Comments
F2I	COPY	for F3I as input and <i>x, y, z, xsize, ysize</i> defined or <i>x, y, z, xsize, zsize</i> defined or



		x, y, z, ysize, zsize defined  for F2I as input and x, y, xsize, ysize defined
--	--	---

KMOS type	DO Category	Comments
F1I	COPY	<p>for F3I as input and x, y, z, xsize defined or x, y, z, ysize defined or x, y, z, zsize defined or <b>x, y, z defined (vector of size 1)</b></p> <p>for F2I as input and x, y, xsize defined or x, y, ysize defined</p> <p>for F1I as input and x, xsize defined or x defined (vector of size 1)</p>

### 7.3.3.7 Examples

extract cube:

```
$ esorex kmo_copy --x=3 --y=2 --z=1 --xsize=2 --ysize=3
--zsize=6 F3I.fits
```

extract plane:

```
$ esorex kmo_copy --x=3 --y=2 --z=1 --xsize=2 --ysize=3 F3I.fits
```

extract vector just of IFU 4:

```
$ esorex kmo_copy --x=3 --y=2 --z=1 --ysize=3 -ifu=4 F3I.fits
```

extract whole IFU 4:

```
$ esorex kmo_copy --x=1 --y=1 --z=1 --xsize=<NAXIS1>
--ysize=<NAXIS2> --zsize=<NAXIS3> --ifu=4 F3I.fits
```

extract scalar:

```
$ esorex kmo_copy --x=3 --y=2 --z=1 F3I.fits
```

autocrop:

```
$ esorex kmo_copy --autocrop=TRUE --ifu=8 F3I.fits
```



### 7.3.4 **kmo\_extract\_spec:** **Extracting Spectra**

Recipe name	used in recipe/function	uses recipe/function
kmo_extract_spec	kmo_std_star kmo_sky_tweak	kmo_make_image kmo_fit_profile

Extract a spectrum from a cube.

#### 7.3.4.1 **Description**

This recipe extracts a spectrum from a datacube. The datacube must be in F3I KMOS FITS format (either with or without noise). The output will be a similarly formatted F1I KMOS FITS file.

##### **Basic parameters:**

--mask\_method

There are several ways to define the region to consider for spectrum calculation:

- **integrated (default)**  
A circular mask with defined centre and radius is created (--centre and --radius have to be defined). This mask is applied to all extensions.
- **mask**  
An arbitrary mask can be provided (for example the mask created by kmo\_sky\_mask can be used). The mask must be in F2I KMOS FITS format, mustn't contain noise and must have as many extensions as the input cube. The mask can be binary as well as it can contain float values, so a weighted mask is also possible. (0: pixels is ignored, 1: pixel is included) The mask must be of the same size that the input datacube.
- **optimal**  
The mask is created automatically by fitting a normalised profile (using kmo\_fit\_profile) to the image of the datacube (using kmo\_make\_image the datacube is summed up in spectral direction according to the specified --cmethod). This profile is then used as mask input. When --save\_mask is set to true the mask is saved on disk. The remaining parameters not described here apply to the fitting of the profile.

If the spectra of several objects in a IFU should be extracted, --mask\_method="mask" is recommended. With several calls to kmo\_extract\_spec using different masks all spectra can be extracted.

##### **Advanced parameters:**

--centre

--radius

see --mask\_method = "integrated"

--save\_mask

see --mask\_method = "optimal"

--cmethod

Applies only if --mask\_method = "integral"

Following methods of frame combination are available:

- **ksigma (default)**

An iterative sigma clipping. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:

$val > mean + stdev * cpos\_rej$

and

$val < mean - stdev * cneg\_rej$

where `--cpos_rej`, `--cneg_rej` and `--citer` are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2).

- **median**

At each pixel position the median is calculated.

- **average**

At each pixel position the average is calculated.

- **sum**

At each pixel position the sum is calculated.

- **min\_max**

The specified number of minimum and maximum pixel values will be rejected.

`--cmax` and `--cmin` apply to this method.

`--cpos_rej`

`--cneg_rej`

`--citer`


see `--cmethod = "ksigma"`

`--cmax`

`--cmin`

see `--cmethod = "min_max"`

### 7.3.4.2 Flow Chart

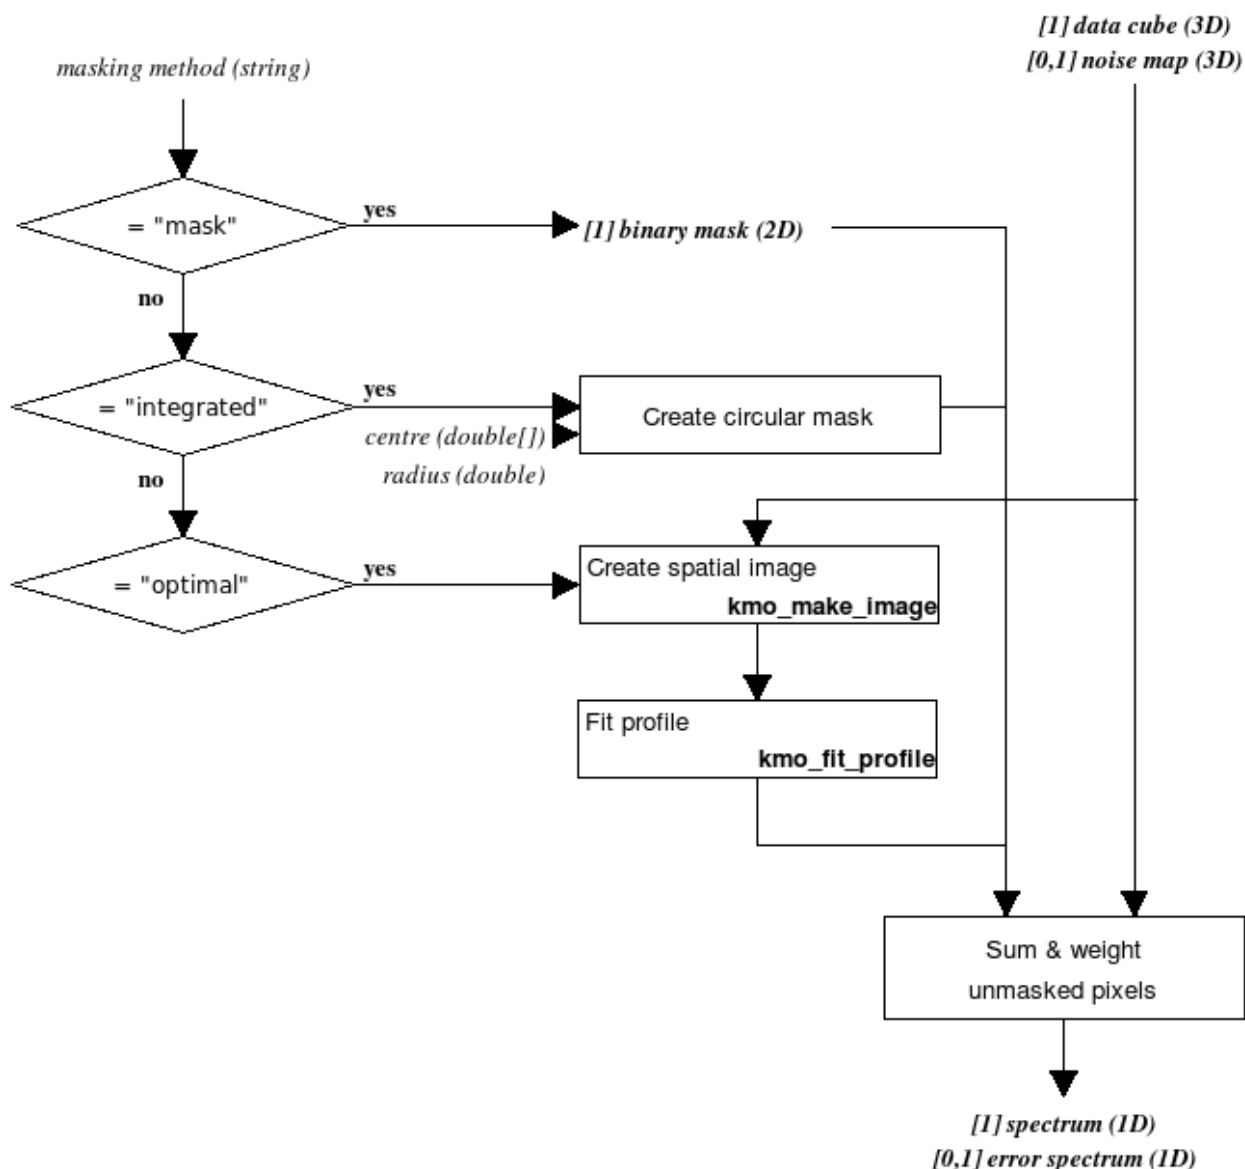

**Figure 39:** Flow chart of the recipe `kmo_extract_spec`

The processing steps are:

1. A mask is generated (or taken as input) where sky is 0.0 and object is 1.0:
  - a. “optimal” method
    - I. The data cube is collapsed using `kmo_make_image`.
    - II. From the resulting image the signal to noise, based on a Gaussian fit using `kmo_fit_profile`, is estimated.
    - III. The fit will be scaled in a way that the maximum value equals one. The result is a mask with float values.
  - b. “integrated” method
    - I. A binary mask with specified centre and radius is defined.
  - c. “mask” method
    - I. The binary input mask is taken.





2. All unmasked pixels in each spatial slice are summed and weighted all along the spectral axis.
3. An optional noise map is masked the same way as the input data and combined as described in Sect. 2.2.2.
4. If there are several objects in a single cube, their spectra can be extracted separately using different masks.

### 7.3.4.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I	none or any	1	cube with or without noise
F2I	none or any	0 or 1	(optional, applies only when <code>--mask_method = "mask"</code> )

This recipe also accepts also a path to a FITS file instead of a sof-file.

### 7.3.4.4 Fits Header Keywords

None specific

### 7.3.4.5 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
<i>mask_method</i>	string	"optimal" "integrated" "mask"	"integrated"	(optional)

#### Advanced parameters

Name	Type	valid values	Default	Comments
<i>centre</i>	double[2]	$0 \leq x \leq \text{NAXIS1}$ , $0 \leq y \leq \text{NAXIS2}$	[7.5,7.5]	The centre of the circular mask [pixel] (mandatory, if <code>--mask_method = "integrated"</code> )
<i>radius</i>	double	radius $\geq 0$	3.0	The radius of the circular mask [pixel] (mandatory, if <code>--mask_method = "integrated"</code> )
<i>save_mask</i>	bool	true false	false	True if the calculated mask should be saved. (optional, applies only when <code>--mask_method = "optimal"</code> )
<i>cmethod</i>	string	"ksigma" "min_max" "average" "median" "sum"	"ksigma"	The averaging method to apply (optional)
<i>cpos_rej</i> <i>cneg_rej</i>	double	$\text{cpos\_rej} \geq 0$ , $\text{cneg\_rej} \geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels (optional, applies only when



				<code>--cmethod = "ksigma")</code>
citer	int	$\text{citer} \geq 1$	3	The number of iterations for kappa-sigma-clipping. (optional, applies only when <code>--cmethod = "ksigma")</code> )
cmax cmin	int	$\text{cmax} \geq 0$ $\text{cmin} \geq 0$	1 1	The number of maximum and minimum pixel values to clip with min/max-clipping (optional, applies only when <code>--cmethod = "min_max")</code> )

### 7.3.4.6 Output Frames

KMOS type	DO Category	Comments
F1I	EXTRACT_SPEC	Extracted spectrum
F2I	EXTRACT_SPEC_MASK	The calculated mask (optional, if <code>--mask_method="optimal"</code> and <code>--save mask=true</code> )

### 7.3.4.7 Examples

```
$ esorex kmo_extract_spec --mask_method="integrated"
                        --centre="3.0:4.5" --radius=4 cube.fits
```

```
$ esorex kmo_extract_spec --mask_method="optimal" cube.fits
```

```
$ esorex kmo_extract_spec --mask_method="mask" extract.sof
```

with `extract.sof` containing:

```
F3I.fits    DATA
F2I.fits    MASK
```

### 7.3.5 **kmo\_fit\_profile:** **Fitting Spectral and Spatial Profiles**

Recipe name	used in recipe/function	uses recipe/function
kmo_fit_profile	kmo_extract_spec kmo_std_star kmo_rtd_image kmo_combine kmo_extract_moments	-

Fit spectral line profiles as well as spatial profiles with a simple function - for example to measure resolution or find the centre of a source.

#### 7.3.5.1 **Description**

This recipe creates either spectral or spatial profiles of sources using different functions to fit. Spectral profiles can be created for F1I frames (if WCS is defined in the input frame, the output parameters are in respect to the defined WCS).

Spatial profiles can be created for F2I frames (any WCS information is ignored here).

If the frames contain no noise information, constant noise is assumed for the fitting procedure.

#### **Basic parameters:**

--method

F1I frames can be fitted using either "gauss", "moffat" or "lorentz" function.

F2I frames can be fitted using either "gauss" or "moffat" function.


#### **Advanced parameters:**

--range

For F1I frames the spectral range can be defined. With available WCS information the range can be provided in units (e.g. "1.2;1.5"), otherwise in pixels (e.g. "112;224").

For F2I frames the spatial range can be defined as follow: "x1,x2;y1,y2"

#### 7.3.5.2 **Flow Chart**

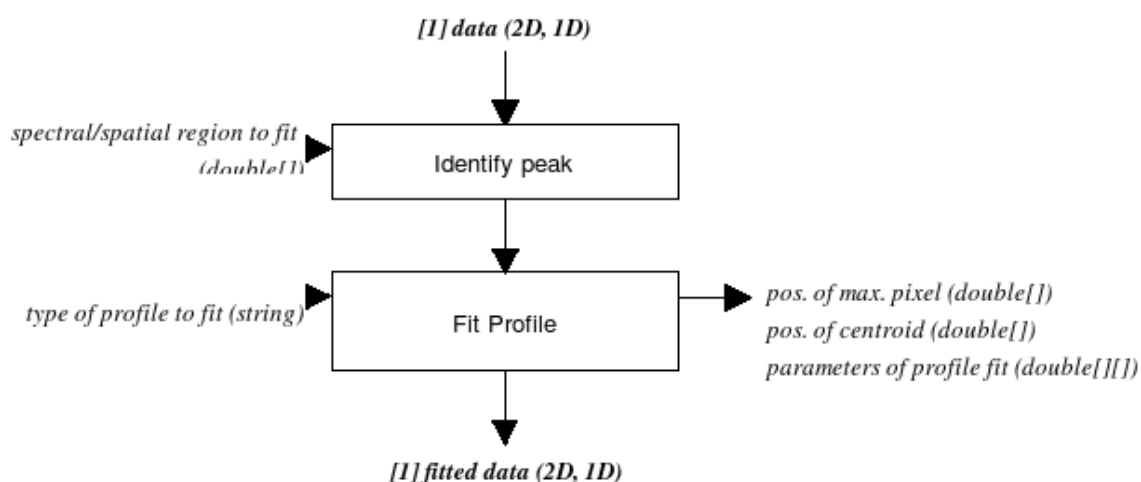

**Figure 40:** Flow chart of the recipe kmo\_fit\_profile

The processing steps are:

1. The region to fit is defined by the spectral (1D) or spatial (2D) interval provided. In this interval, the peak is identified.
2. Then a function is fitted to the interval according to a defined profile (Gaussian, Moffat, Lorentzian). Output parameters are the position (either lambda-position or pixel number depending if WCS data is provided in the headers of the input data frames) of the maximum pixel, the position of the centroid and the parameters of the function fit.

### 7.3.5.3 Input Frames

KMOS type	DO category	Amount	Comments
F1I or F2I	none or any	1	data frame, with or without noise

This recipe also accepts also a path to a FITS file instead of a sof-file.

### 7.3.5.4 Fits Header Keywords

#### Primary Header

Keyword	Type	Value	Comments
MINDIT	double	~2.5	Estimated value
NDIT	Int	1	
EXPTIME	double	any	

#### Sub Headers

Keyword	Type	Value	Comments
CRPIX1	double	any	(optional for F1I frames)
CRVAL1	double	any	(optional for F1I frames)
CDEL1	double	any	(optional for F1I frames)

### 7.3.5.5 Configuration Parameters

Name	Type	valid values	Default	Comments
method	string	“gauss”, “moffat”, “lorentz”	“gauss”	(optional, “lorentz” applies only to F1I frames)
range	string	“x1,x2” (for F1I)  or  “x1,x2; y1,y2” (for F2I)	“”	F1I frames with WCS: values are in microns F1I frames without WCS: values denote pixel positions (zero based). F2I frames: values denote pixel positions (base 1 for images, FITS convention) (optional, default is the whole range)

### 7.3.5.6 Output Frames

KMOS type	DO Category	Comments
-----------	-------------	----------



F1I or F2I	FIT_PROFILE	Fitted 1D-profile or Fitted 2D-profile <i>(in both cases without noise)</i>
---------------	-------------	---

## 7.3.5.7 Examples

```
$ esorex kmo_fit_profile fli_with_noise.fits
```

### 7.3.6 **kmo\_make\_image:** **Making Images**

Recipe name	used in recipe/function	uses recipe/function
kmo_make_image	kmo_std_star kmo_illumination kmo_rtd_image kmo_extract_spec kmo_combine	-

Collapse a cube to create a spatial image.

#### 7.3.6.1 **Description**

This recipe collapses a cube along the spectral axis using rejection. By default all spectral slices are averaged.

Errors are propagated for the same spectral ranges as for the input data if a noise map is provided.

##### **Basic parameters:**

--range

The spectral range can be delimited to one or several sub-ranges like “1.8,1.9” or “1.8,1.9; 2.0,2.11”

--cmethod

Following methods of collapsing a cube are available:

- **ksigma (default)**  
An iterative sigma clipping. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:  

$$val > mean + stdev * cpos\_rej$$
and  

$$val < mean - stdev * cneg\_rej$$
where --cpos\_rej, --cneg\_rej and --citer are the corresponding configuration parameters. In the first iteration median and percentile level are used (See Sec. 8.2).
- **median**  
At each pixel position the median is calculated.
- **average**  
At each pixel position the average is calculated.
- **sum**  
At each pixel position the sum is calculated.
- **min\_max**  
The specified number of minimum and maximum pixel values will be rejected.  
--cmax and --cmin apply to this method.

##### **Advanced parameters:**

--threshold


Optionally an OH spectrum can be provided. In this case a threshold can be defined. The wavelengths of values above the threshold level in the OH spectrum are omitted in the input frame. This parameter can be combined with the --range parameter. Negative threshold values are ignored.

Own spectra can be converted into the required F1S KMOS FITS format for the OH spectrum using `kmo_fits_stack`.

```
--cpos_rej
--cneg_rej
--citer
see --cmethod = "ksigma"

--cmax
--cmin
see --cmethod = "min_max"
```

### 7.3.6.2 Flow Chart

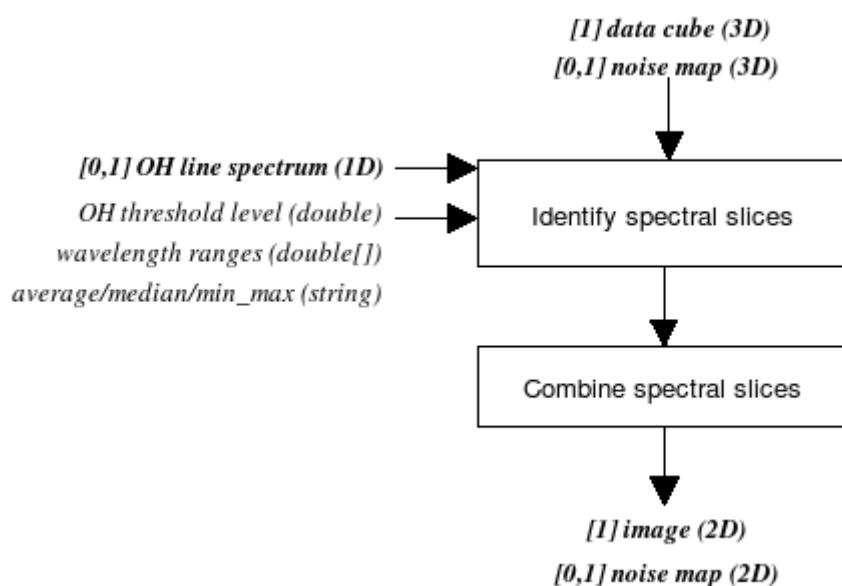

**Figure 41:** Flow chart of the recipe `kmo_make_image`

The processing steps are:

1. If a OH line spectrum is provided, the spectral slices which are to be combined are identified according to the threshold level and the wavelength ranges applied to the spectrum (i.e. if the wavelength of the spectral slice lies in between a predefined range or above the threshold level in the OH line spectrum, it is omitted).
2. The identified spectral slices are averaged to create a spatial image (Either applying a median or averaging using rejection or `min_max` rejecting a predefined number of max- and min-values).
3. Optionally a noise map matching the data cube can be provided, it will be combined along the same spectral ranges as defined above (see also section 2.2.2) and output as a 2d noise map.

### 7.3.6.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I	none or any	1	data frame, with or without noise



F1S	none or any	0 or 1	the OH line spectrum. Own spectra can be converted to F1S using kmo_fits_stacker ( <i>optional</i> )
-----	-------------	--------	--

This recipe also accepts also a path to a FITS file instead of a sof-file.

### 7.3.6.4 Fits Header Keywords

#### **Primary Header**

Keyword	Type	Value	Comments
MINDIT	double	~2.5	Estimated value
NDIT	int	1	
EXPTIME	double	any	

#### **Sub Headers**

Keyword	Type	Value	Comments
CRPIX3	double	any	
CRVAL3	double	any	
CDEL3	double	any	

### 7.3.6.5 Configuration Parameters

#### **Basic parameters**

Name	Type	valid values	Default	Comments
<i>range</i>	string	“start1,end1;start2,end2; ...”	“”	The spectral ranges to combine ( <i>optional, applies only if a OH-spectrum is provided</i> )
<i>threshold</i>	double	any, if <i>threshold</i> < 0 then no thresholding is applied	0.1	The OH threshold level ( <i>optional, applies only if a OH-spectrum is provided</i> )
<i>cmethod</i>	string	“ksigma” “min_max” “average” “median” “sum”	“ksigma”	The averaging method to apply ( <i>optional</i> )
<i>cpos_rej</i> <i>cneg_rej</i>	double	<i>cpos_rej</i> ≥ 0, <i>cneg_rej</i> ≥ 0	3.0 3.0	The positive and negative rejection thresholds for bad pixels ( <i>optional, applies only when --cmethod = “ksigma”</i> )
<i>citer</i>	int	<i>citer</i> ≥ 1	3	The number of iterations for kappa-sigma-clipping. ( <i>optional, applies only when --cmethod = “ksigma”</i> )
<i>cmax</i>	int	<i>cmax</i> ≥ 0	1	The number of maximum





cmin		cmin $\geq$ 0	1	and minimum pixel values to clip with min/max- clipping ( <i>optional, applies only when --cmethod = "min_max"</i> )
------	--	---------------	---	---

### 7.3.6.6 Output Frames

KMOS type	DO Category	Comments
F2I	MAKE_IMAGE	Collapsed data cubes

### 7.3.6.7 Examples

```
$ esorex kmo_make_image data.fits
```

```
$ esorex kmo_make_image data_noise.fits
```

```
$ esorex kmo_make_image --method="median" data_noise.fits
```

```
$ esorex kmo_make_image --method="average" --pos_rej_thresh=2.2  
--neg_rej_thresh=1.7 --iterations=2  
data_noise.fits
```

```
$ esorex kmo_make_image --method="min_max" --nr_max=20 --nrmin=10  
data_noise.fits
```

```
$ esorex kmo_make_image F3I_ohspec.sof
```

with F3I\_ohspec.sof containing:

```
data.fits      DATA  
oh_spec.fits   OH_LIST
```

```
$ esorex kmo_make_image --range="1.8,1.9;2.0,2.1" F3I_ohspec.sof
```

with F3I\_ohspec.sof containing:

```
data.fits      DATA  
oh_spec.fits   OH_LIST
```

## 7.3.7 **kmo\_noise\_map:** **Noise Estimation**


Recipe name	used in recipe/function	uses recipe/function
kmo_noise_map	kmo_std_star kmo_sci_red	-

Generate a noise map from a raw frame.

### 7.3.7.1 **Description**

The noise in each pixel of the input data is estimated using gain and readnoise. The readnoise is expected to be in the primary header (ESO DET CHIP RON), the gain (ESO DET CHIP GAIN) has to be in each of the subsequent headers of each detector frame. The output is the initial noise map of the data frame.

### 7.3.7.2 **Flow Chart**

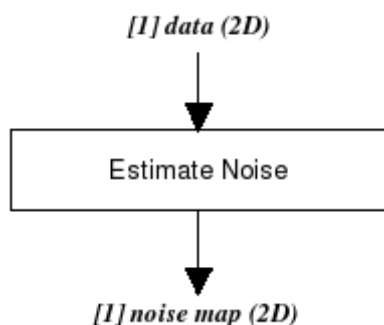

**Figure 42:** Flow chart of the recipe kmo\_noise\_map

The noise in each pixel of the input data is estimated according to the method described in Sect. 2.2.1. The output is the initial noise map of the data frame.

### 7.3.7.3 **Input Frames**

KMOS type	DO category	Amount	Comments
RAW	none or any	1	raw data frame

This recipe also accepts also a path to a FITS file instead of a sof-file.

### 7.3.7.4 **Fits Header Keywords**

#### **Primary Header**

Keyword	Type	Value	Comments
MINDIT	double	~2.5	Estimated value
NDIT	Int	1	
EXPTIME	double	any	

#### **Sub Headers**

Keyword	Type	Value	Comments
ESO DET CHIP GAIN	double	any	



ESO DET CHIP RON	double	any	
------------------	--------	-----	--

## 7.3.7.5 Configuration Parameters

None

## 7.3.7.6 Output Frames

KMOS type	DO Category	Comments
F2D	NOISE_MAP	Initial noise map

## 7.3.7.7 Examples

```
$ esorex kmo_noise_map RAW.fits
```

### 7.3.8 **kmo\_reconstruct:** **Reconstructing a Cube**

Recipe name	used in recipe/function	uses recipe/function
kmo_reconstruct	kmo_std_star kmo_illumination kmo_sci_red kmo_rtd_image	-

Performs the cube reconstruction using different interpolation methods.

#### 7.3.8.1 **Description**

Data with or without noise is reconstructed into a cube using the calibration frames XCAL, YCAL and LCAL. XCAL and YCAL are generated using recipe `kmo_flat`, LCAL is generated using recipe `kmo_wave_cal`.

The input data can contain noise extensions and will be reconstructed into additional extensions.

#### **Basic parameters:**

`--imethod`

The interpolation method used for reconstruction.

`--detectorimage`

Specify if a resampled image of the input frame should be generated. Therefore all slitlets of all IFUs are aligned one next to the other. This frame serves for quality control. One can immediately see if the reconstruction was successful.

`--file_extension`

Set to TRUE if OBS\_ID (from input frame header) should be appended to the output frame.

#### **Advanced parameters:**

`--flux`

Specify if flux conservation should be applied.

`--neighborhoodRange`

Defines the range to search for neighbors during reconstruction

`--b_samples`

The number of samples in spectral direction for the reconstructed cube. Ideally this number should be greater than 2048, the detector size.

`--b_start`

`--b_end`

Used to define manually the start and end wavelength for the reconstructed cube. By default the internally defined values are used (see Section 6.3).


`--pix_scale`

Change the pixel scale [arcsec]. Default of 0.2" results into cubes of 14x14pix, a scale of 0.1" results into cubes of 28x28pix, etc.

--xcal\_interpolation

If TRUE interpolate the pixel position in the slitlet (xcal) using the two closest rotator angles in the calibration file. Otherwise take the values of the closest rotator angle.

### 7.3.8.2 Flow Chart

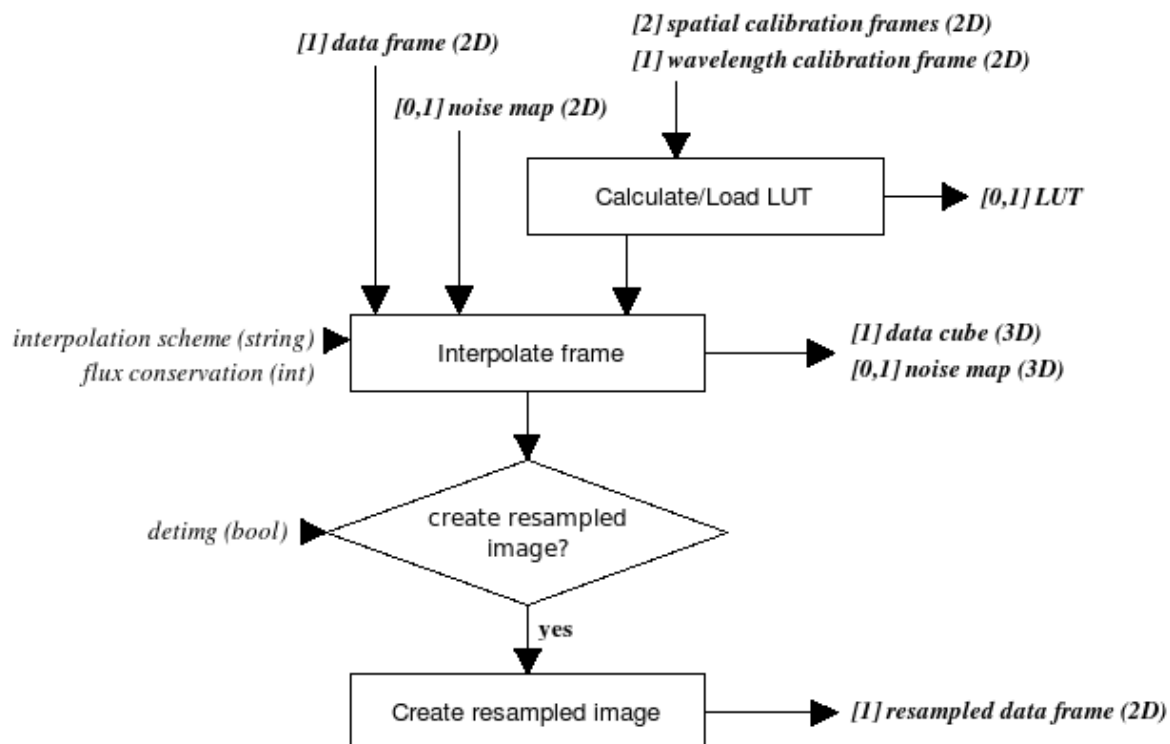

**Figure 43:** Flow chart of the recipe kmo\_reconstruct

The processing steps are:

1. First the LUT for correcting spectral curvature and wavelength position is calculated and saved to disk or just loaded from disk (see Sec. 6.2)
2. Then the data cube and the optional noise map are interpolated according the LUT. Additionally the interpolation scheme can be chosen and if flux conservation should be applied.
3. If desired the reconstructed cube can also be saved as resampled image, meaning that the reconstructed cube is decomposed into its slitlets which are saved into a frame with one slitlet beside the other. This way the quality of reconstruction can be determined quickly visually.

### 7.3.8.3 Input Frames

KMOS type	DO category	Amount	Comments
RAW or F2D	DARK or FLAT_ON or ARC_ON or OBJECT or STD or SCIENCE	1	data frame, with or without noise
F2D	XCAL	1	Calibration frame 1 (from kmo_flat)

F2D	YCAL	1	Calibration frame 2 (from <i>kmo_flat</i> )
F2D	LCAL	1	Calibration frame 3 (from <i>kmo_wave_cal</i> )
F2L	WAVE_BAND	1	Table with start-/end-values of wavelengthrange
F1S	OH_SPEC	0,1	OH reference spectrum

## 7.3.8.4 Fits Header Keywords

### Primary Header

None

### Sub Headers

None

## 7.3.8.5 Configuration Parameters

### Basic parameters

Name	Type	valid values	Default	Comments
<i>imethod</i>	string	“NN” “lwNN” “swNN” “MS” “CS”	“CS”	Interpolation method: NN: Nearest Neighbor lwNN: linear weighted NN swNN: square weighted NN MS: Modified Shepard’s method CS: Cubic spline ( <i>optional</i> )
<i>detectorimage</i>	bool	TRUE, FALSE	FALSE	TRUE if resampled detector image should be created, FALSE otherwise
<i>file_extension</i>	bool	TRUE, FALSE	FALSE	TRUE if OBS_ID keyword should be appended to output frames, FALSE otherwise

### Advanced parameters

Name	Type	valid values	Default	Comments
<i>flux</i>	bool	TRUE, FALSE	FALSE	Apply flux conservation
<i>neighborhoodRange</i>	double	$\geq 1$	1.001	Defines the range to search for neighbors
<i>b_samples</i>	int	$b\_samples > 2$	2048	Nr. of samples of reconstructed data for the wavelength
<i>b_start</i> <i>b_end</i>	double	$b\_start > 0.0$ $b\_end > b\_start$	-1.0	Start and end wavelength. The defaults of -1.0 instruct to use the internally defined range (see Section 6.3)
<i>pix_scale</i>	double	TRUE, FALSE	0.2	The pixel scale: 0.2 arcsec results in cubes of 14x14



				pixels. 0.1 arcsec result in cubes of 28x28 pixels
<i>xcal_interpolation</i>	bool	TRUE, FALSE	TRUE	

***Options for pipeline developers only:***

Name	Type	valid values	Default	Comments
dev_flip	bool	TRUE, FALSE	FALSE	Set this parameter to TRUE if the wavelengths on the detector are ascending from bottom to top (only for old simulation data)

### 7.3.8.6 Output Frames

KMOS type	DO Category	Comments
F3I	CUBE_DARK or CUBE_FLAT or CUBE_ARC or CUBE_OBJECT_SCIENCE or CUBE_SKY_SCIENCE	Reconstructed cube with or without noise
F2D	DET_IMG_REC	if parameter <code>--detimg</code> has been set to TRUE

***Additional Output***

All recipes doing reconstruction of cubes create a LUT which by default is saved to disk. For further information see Sec. 6.4.

### 7.3.8.7 Examples

```
$ esorex kmo_reconstruct reconstruct.sof
```

```
with reconstruct.sof containing:
object_science.fits  OBJECT_SCIENCE
xcal_YJYJYJ.fits     XCAL
ycal_YJYJYJ.fits     YCAL
lcal_YJYJYJ.fits     LCAL
kmos_wave_band.fits  WAVE_BAND
```

### 7.3.9 **kmo\_rotate:** **Rotating a Cube**

Recipe name	used in recipe/function	uses recipe/function
kmo_rotate	kmo_extract_pv	-

Rotate a cube spatially.

#### 7.3.9.1 **Description**

This recipe rotates a cube spatially (CCW). If the rotation angle isn't a multiple of 90 degrees, the output cube will be interpolated and get larger accordingly.

By default all IFUs will be rotated.

#### **Basic parameters:**

`--rotations`

This parameter must be supplied. It contains the amount of rotation to apply. The unit is in degrees. If it contains one value (e.g. "3.5") all IFUs are rotated by the same amount. If 24 values are supplied each IFU is rotated individually (e.g. "2.3;15.7;...;-3.3").

`--imethod`

The interpolation method to apply when rotating an angle not being a multiple of 90. There are two methods available:

- BCS: Bicubic spline
- NN: Nearest Neighbor (currently disabled)

`--ifu`

If a single IFU should be rotated, it can be defined using the `--ifu` parameter (`--rotations` parameter contains only one value).

#### **Advanced parameters:**

`--flux`


Specify if flux conservation should be applied.

`--extrapolate`

By default the output frame grows when rotating an angle not being a multiple of 90. In this case none of the input data is lost. When it is desired to keep the same size as the input frame this parameter can be set to TRUE and the data will be clipped.



## 7.3.9.2 Flow Chart

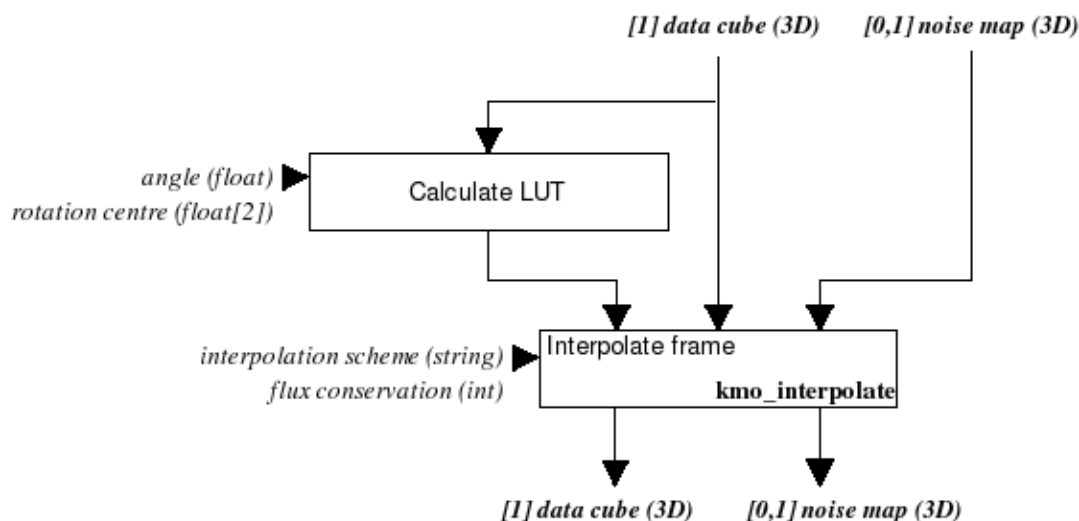

**Figure 44:** Flow chart of the recipe kmo\_rotate

The processing steps are:

1. First the LUT representing the spatial rotation is calculated.
  2. Then the data cube and the optional noise map are interpolated according the LUT.
- Additionally the interpolation scheme can be chosen and if flux conservation should be applied.

## 7.3.9.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I	none or any	1	data frame, with or without noise

This recipe also accepts also a path to a FITS file instead of a sof-fil

## 7.3.9.4 Fits Header Keywords

### Primary Header

Keyword	Type	Value	Comments
MINDIT	double	~2.5	Estimated value
NDIT	Int	1	
EXPTIME	double	any	

### Sub Headers

Keyword	Type	Value	Comments
CRPIX1, CRPIX2	double	any	
CRVAL1, CRVAL2	double	any	
CDELTA1, CDELTA2	double	any	
CD-Matrix	double	any	



### 7.3.9.5 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
<i>rotations</i>	string	string with 1 or 24 elements [degrees] e.g. "2.3;15.7;...;-3.3"	""	The rotations for all specified IFUs ( <i>mandatory</i> )
<i>imethod</i>	string	"BCS" "NN"	"BCS"	Interpolation method: BCS: Bicubic spline NN: Nearest Neighbor ( <i>optional, applies only when rotation angle isn't a multiple of 90 degrees</i> )
<i>ifu</i>	int	$24 \geq \text{ifu} \geq 0$	0	The ifu to rotate. 0 rotates all ifus the same amount ( <i>optional</i> )

#### Advanced parameters

Name	Type	valid values	Default	Comments
<i>flux</i>	bool	TRUE, FALSE	FALSE	Apply flux conservation
<i>extrapolate</i>	bool	TRUE, FALSE	FALSE	FALSE: Output frame will be larger than the input TRUE: Output and input frame have the same size, data will be clipped ( <i>optional, applies only when rotation angle isn't a multiple of 90 degrees</i> )

### 7.3.9.6 Output Frames

KMOS type	DO Category	Comments
F3I	ROTATE	Rotated cube

### 7.3.9.7 Examples

```
$ esorex kmo_rotate --ifu=8 --rotations="93.87" data.fits
```

```
$ esorex kmo_rotate -rotations="1.1;3.8;-4.5;.....;18,9" data.fits
```

## 7.3.10 **kmo\_shift:** **Translating a Cube**

Recipe name	used in recipe/function	uses recipe/function
kmo_shift	kmo_extract_pv kmo_combine	-

Shift a cube spatially.

### 7.3.10.1 **Description**

This recipe shifts a cube spatially. A positive x-shift shifts the data to the left, a positive y-shift shifts upwards, where a shift of one pixel equals 0.2 arcsec. The output will still have the same dimensions, but the borders will be filled with NaNs accordingly.

To adjust only the WCS without moving the data the `--wcs-only` parameter has to be set to TRUE. The WCS is updated in the same way as if the data would have moved as well. This means that the point at (x,y) has the same coordinates as the point (x+1,y+1) after updating the WCS (the WCS moved in the opposite direction).

#### **Basic parameters:**

`--shifts`

This parameter must be supplied. It contains the amount of shift to apply. The unit is in arcsec. If the `--shifts` parameter contains only two values (x,y), all IFUs will be shifted by the same amount. If it contains 48 values (x1,y1;x2,y2;...;x24,y24), the IFUs are shifted individually.

`--imethod`

The interpolation method to apply when the shift value isn't a multiple of the pixel scale. There are two methods available:

- BCS: Bicubic spline
- NN: Nearest Neighbor

`--ifu`

If a single IFU should be shifted, it can be defined using the `--ifu` parameter (`--shifts` parameter contains only two values).

#### **Advanced parameters:**

`--flux`

Specify if flux conservation should be applied when applying a subpixel shift.


`--extrapolate`

By default no extrapolation is applied. At the borders NaN values are introduced. When choosing "BCS" as interpolation method and applying a sub-pixel shift, extrapolation can be switched on.

`--wcs-only`

By default data and WCS are shifted in sync. If this parameter is set to TRUE only the WCS is updated (i.e. if someone thinks that the IFU isn't pointing exactly to the correct coordinates).

### 7.3.10.2 Flow Chart

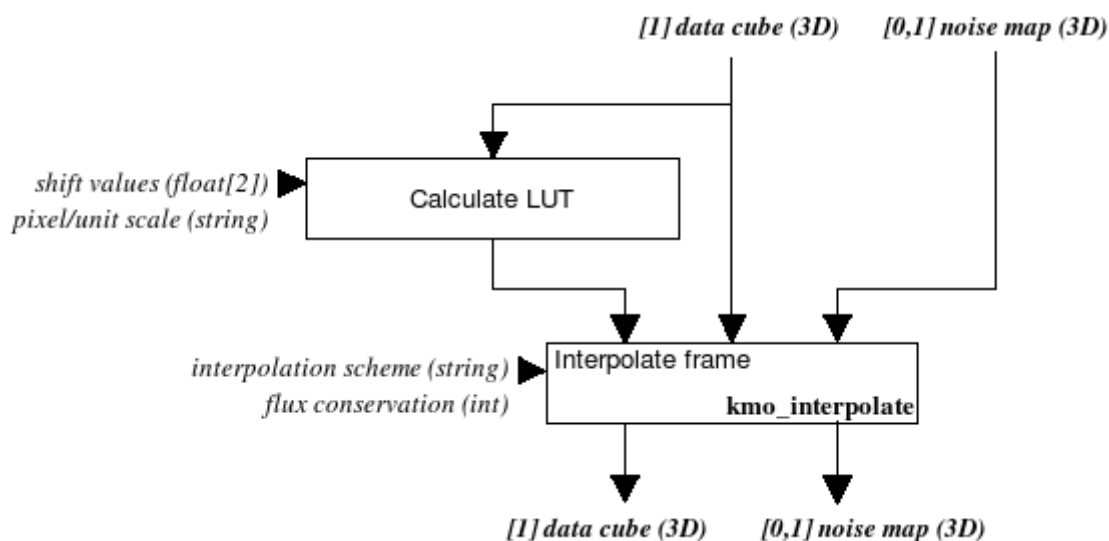

**Figure 45:** Flow chart of the recipe kmo\_shift

The processing steps are:

1. First the LUT representing the shift is calculated.
  2. Then the data cube and the optional noise map are interpolated according the LUT.
- Additionally the interpolation scheme can be chosen and if flux conservation should be applied.

### 7.3.10.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I	none or any	1	data frame, with or without noise

This recipe also accepts also a path to a FITS file instead of a sof-fil

### 7.3.10.4 Fits Header Keywords

#### **Primary Header**

Keyword	Type	Value	Comments
MINDIT	double	~2.5	Estimated value
NDIT	Int	1	
EXPTIME	double	any	

#### **Sub Headers**

Keyword	Type	Value	Comments
CRPIX1, CRPIX2	double	any	
CRVAL1, CRVAL2	double	any	
CDELTA1, CDELTA2	double	any	
CD-Matrix	double	any	



### 7.3.10.5 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
<i>shifts</i>	string	string with 2 or 48 elements [arcsec] e.g. [x1, y1; x2, y2;...]	""	The shifts for each spatial dimension for all specified IFUs ( <i>mandatory</i> )
<i>imethod</i>	string	"BCS" "NN"	"BCS"	Interpolation method: BCS: Bicubic spline NN: Nearest Neighbor ( <i>optional, applies only when the shift isn't a multiple of the pixel scale</i> )
<i>ifu</i>	int	$24 \geq \text{ifu} \geq 0$	0	The ifu to shift. 0 shifts all ifus the same amount ( <i>optional</i> )

#### Advanced parameters

Name	Type	valid values	Default	Comments
<i>flux</i>	bool	TRUE, FALSE	FALSE	Apply flux conservation ( <i>optional</i> )
<i>extrapolate</i>	bool	TRUE, FALSE	FALSE	FALSE: shifted IFU will be filled with NaNs at the borders TRUE: shifted IFU will be extrapolated at the borders ( <i>optional, applies only when method=BCS and doing sub pixel shifts</i> )
<i>wcs-only</i>	bool	TRUE, FALSE	FALSE	FALSE: data and WCS are shifted together TRUE: only the WCS is shifted

### 7.3.10.6 Output Frames

KMOS type	DO Category	Comments
F3I	SHIFT	Shifted cube

### 7.3.10.7 Examples

```
$ esorex kmo_shift --ifu=8 --shifts="0.2,0.11" data.fits
```

```
$ esorex kmo_shift -shifts="0.4,0.2;-0.01,-0.09;.....;0.1;0.1" data.fits
```

### 7.3.11 **kmo\_sky\_mask:** **Creating a Mask of Sky Pixels**

Recipe name	used in recipe/function	uses recipe/function
kmo_sky_mask	kmo_sky_tweak	kmo_stats

Create a mask of spatial pixels that indicates which pixels can be considered as sky.

#### 7.3.11.1 **Description**

This recipes calculates masks of the skies surrounding the objects in the different IFUs of a reconstructed F3I frame. In the resulting mask pixels belonging to objects have value 1 and sky pixels have value 0.

The noise and the background level of the input data cube are estimated using the mode calculated in **kmo\_stats**. If the results aren't satisfactory, try changing `--cpos_rej` and `--cneg_rej`. Then pixels are flagged in the data cube which have a value less than the mode plus twice the noise ( $val < mode + 2 * sigma$ ). For each spatial pixel the fraction of flagged pixels in its spectral channel is determined.

Spatial pixels are selected where the fraction of flagged spectral pixels is greater than 0.95 (corresponding to the  $2 * sigma$  above).

The input cube can contain noise extensions, but they will be ignored. The output doesn't contain noise extensions.

#### **Basic parameters:**

`--fraction`

The fraction of pixels that have to be greater than the threshold can be defined with this parameter (value must be between 0 and 1).

`--range`

If required, a limited wavelength range can be defined (e.g. "1.8,2.1").

#### **Advanced parameters:**

`--cpos_rej`

`--cpos_rej`

`--citer`

An iterative sigma clipping is applied in order to calculate the mode (using **kmo\_stats**). For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:


$val > mean + stdev * cpos\_rej$

and

$val < mean - stdev * cneg\_rej$

In the first iteration median and percentile level are used.

### 7.3.11.2 Flow Chart

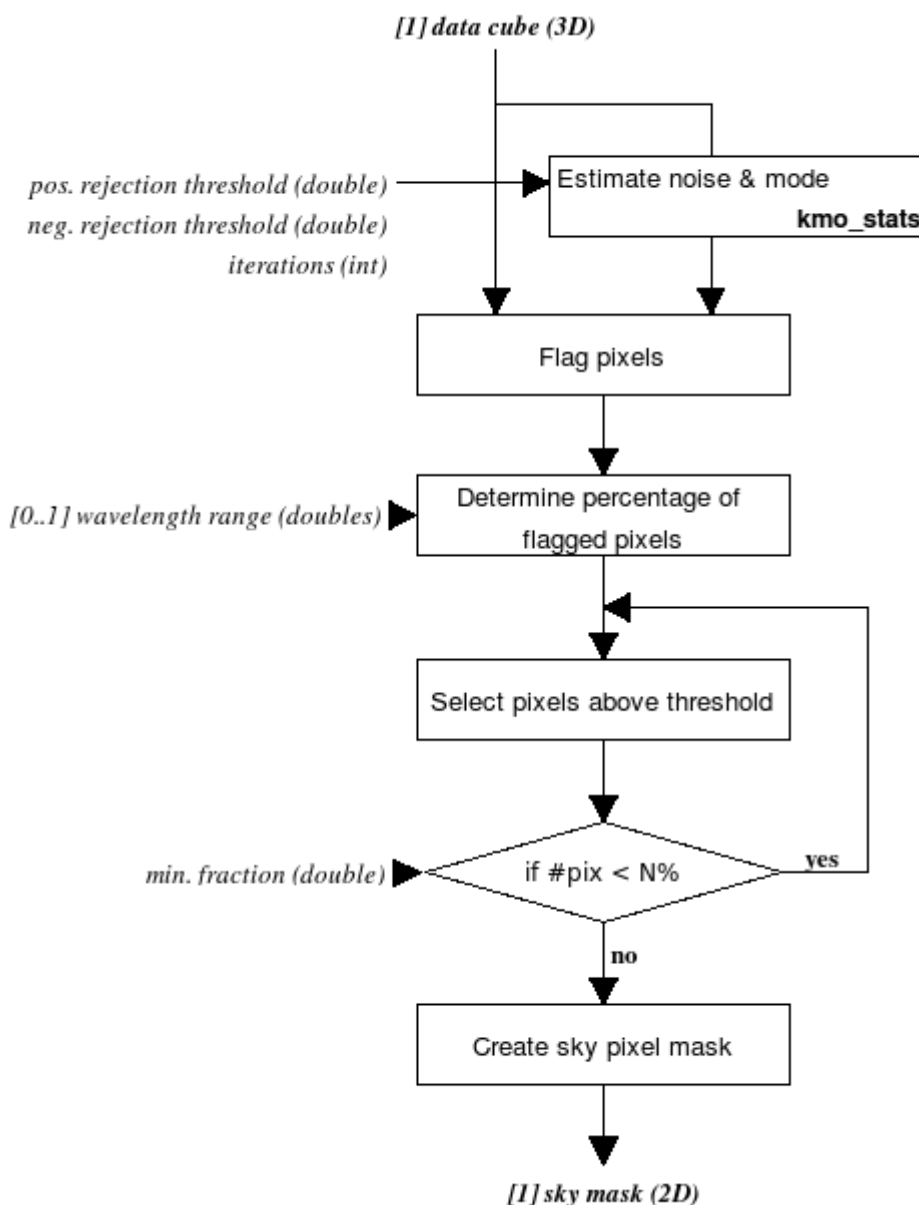

**Figure 46:** Flow chart of the recipe kmo\_sky\_mask

The processing steps are:

1. The noise and the background level (mode) of the input data cube are estimated. Note that although the noise varies with wavelength, a single estimate of the noise is sufficient for the purpose here.
2. Flag pixels in the data cube which have a value less than the mode plus twice the noise ( $val < mode + 2\sigma$ )
3. For each spatial pixel the fraction of flagged pixels in its spectral channels is determined. If required, a limited wavelength range can be provided for this step.
4. Spatial pixels are selected where the fraction of flagged spectral pixels is greater than 0.95 (corresponding to the  $2\sigma$  above)
5. If less than a specified percentage of spatial pixels are included, then increase the selection to include this many.



Create a mask indicating ‘sky’ pixels (sky = 0, object = 1).

### 7.3.11.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I	none or any	1	one reconstructed frame

This recipe also accepts also a path to a FITS file instead of a sof-file.

### 7.3.11.4 Fits Header Keywords

#### **Primary Header**

Keyword	Type	Value	Comments
MINDIT	double	~2.5	Estimated value
NDIT	Int	1	
EXPTIME	double	any	

#### **Sub Headers**

Keyword	Type	Value	Comments
CRPIX3	double	any	
CRVAL3	double	any	
CDEL3	double	any	

### 7.3.11.5 Configuration Parameters

#### **Basic parameters**

Name	Type	valid values	Default	Comments
<i>fraction</i>	double	$1.0 \geq \text{fraction} \geq 0.0$	0.95	Minimum fraction of spatial pixels to select as sky (optional)
<i>range</i>	string	“start,end”	“”	Min & max spectral range to use in sky pixel determination (microns) (optional)

#### **Advanced parameters**

Name	Type	valid values	Default	Comments
cpos_rej cneg_rej	double	cpos_rej $\geq 0$ , cneg_rej $\geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels (optional)
citer	int	citer $\geq 1$	3	The number of iterations for kappa-sigma-clipping. (optional)





## 7.3.11.6 Output Frames

KMOS type	DO Category	Comments
F2I	SKY_MASK	The sky mask frame

## 7.3.11.7 Examples

```
$ esorex kmo_sky_image f3i.fits
```

```
$ esorex kmo_sky_image -fraction=0.6 f3i.fits
```

```
$ esorex kmo_sky_image --ranges="1.8,1.9" f3i.fits
```

## 7.3.12 kmo\_sky\_tweak: Second Order Sky Subtraction


Recipe name	used in recipe/function	uses recipe/function
kmo_sky_tweak	kmo_sci_red	kmo_arithmetic kmo_extract_spec kmo_sky_mask kmo_shift kmo_fit_profile

Removal of OH sky lines.

### 7.3.12.1 Description

The recipe, as implemented, is divided into 2 main processing steps: removal of thermal background (**Figure 47**) and compensation of vibrational variations (**Figure 48**).

### 7.3.12.2 Flow Chart

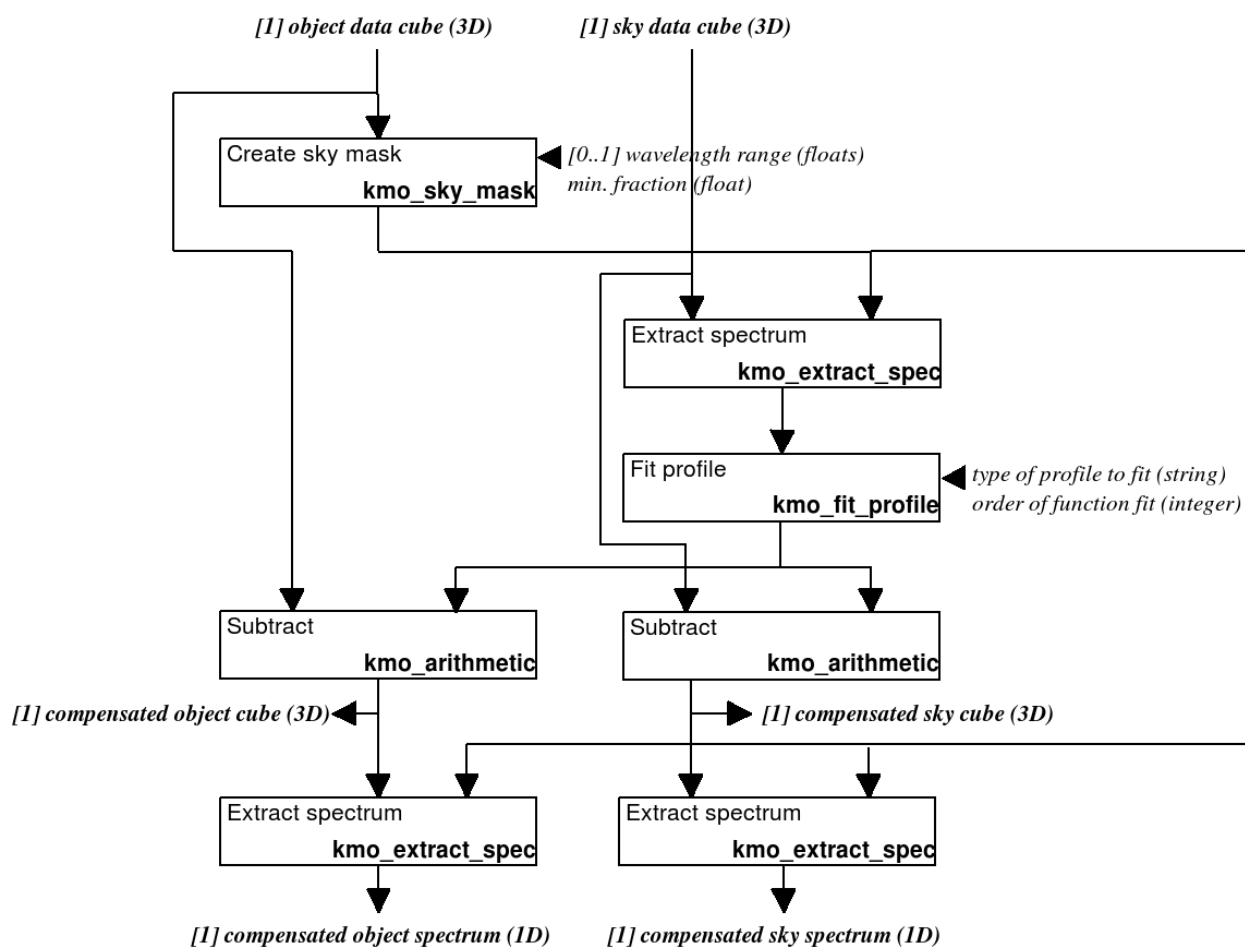


**Figure 47:** Flow chart of the recipe kmo\_sky\_tweak (Part 1)

The processing steps of **Figure 47** are:

1. Identify spaxels with least flux in object cube (kmo\_sky\_mask).

2. Sum spectra from these spaxels in both object and sky cubes separately.
3. Fit a blackbody function to the underlying continuum in the sky spectrum (the thermal background).
4. The fitted function is subtracted from both the original object and sky cubes and from the extracted object and sky spectra.
5. The spectra with removed thermal background are compared with regard to offsets in bright OH lines. The sky cube (with removed thermal background) is shifted accordingly. Note that for KMOS, the default is for spectral flexure to already be corrected. However there may be some situations where this is not so, in which case this step is carried out here.
6. Again the spectrum of the processed object and sky cubes are extracted using the same mask as in step 1.

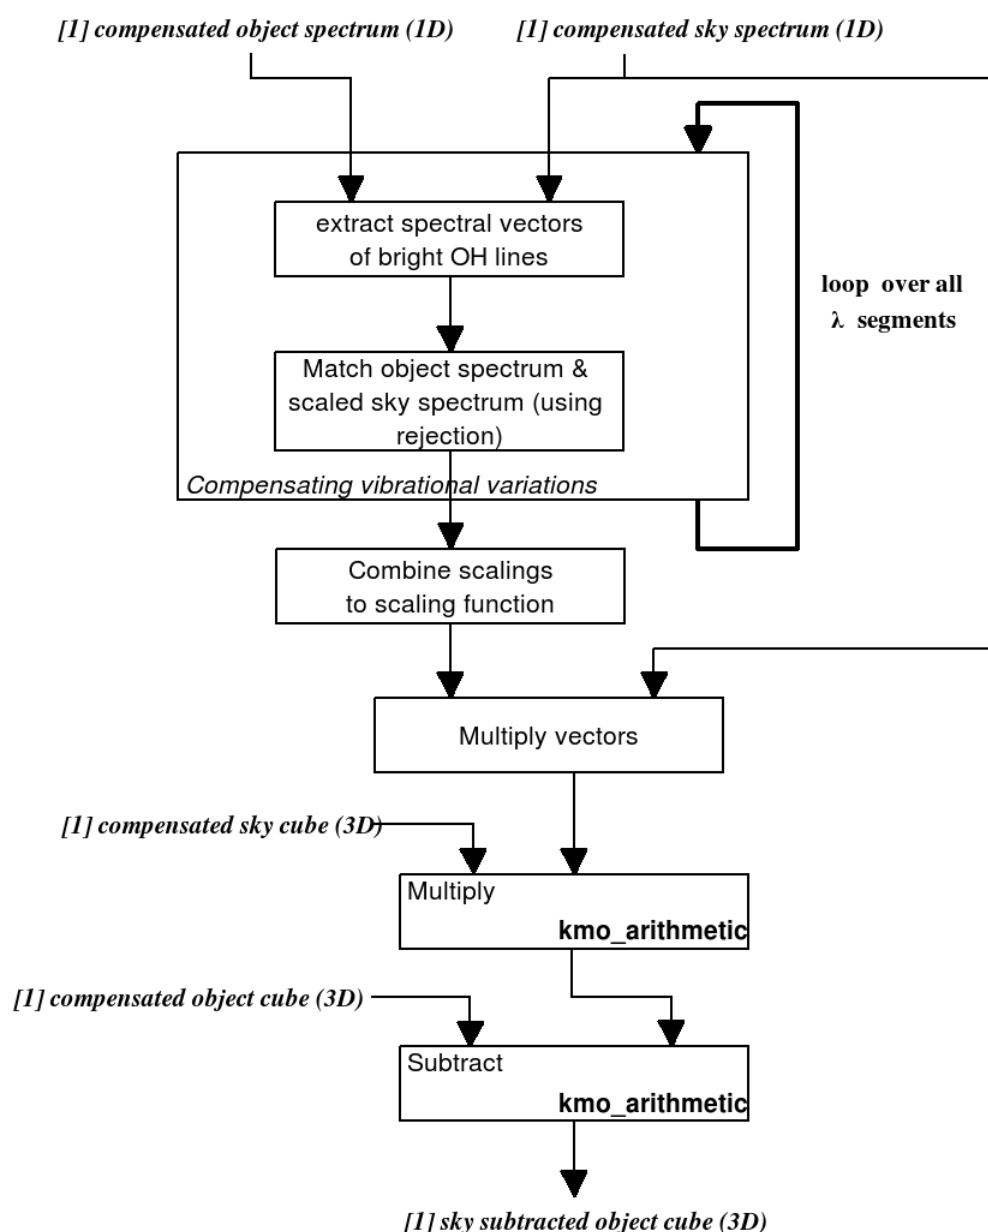

**Figure 48:** Flow chart of the recipe kmo\_sky\_tweak (Part 2)

The processing steps of **Figure 48** are:

1. To correct vibrational variations, the spectra are divided into segments along the wavelength axis. For each segment the spectral vectors of bright OH lines are extracted.
2. The sky spectrum is scaled to match the object spectrum in each spectral segment.
3. The scalings of each spectral segment are combined to a single scaling function which is applied to the sky spectrum.
4. To correct rotational variations, steps 7 to 9 are repeated.
5. The two scaling functions are multiplied.
6. The resulting scaling function is multiplied with the compensated sky cube which in turn is subtracted from the compensated object cube.

### 7.3.12.3 Input Frames

KMOS type	DO category	Amount	Comments
F3I	CUBE_OBJECT	$\geq 1$	object cubes
F3I	CUBE_SKY	1	sky cubes

### 7.3.12.4 Fits Header Keywords

#### **Primary Header**

None

#### **Sub Headers**

None

### 7.3.12.5 Configuration Parameters

None

### 7.3.12.6 Output Frames

KMOS type	DO Category	Comments
F3I	OBJECT_S	Sky-corrected object cubes

### 7.3.12.7 Examples

```
$ esorex kmo_sky_tweak tweak.sof
```

with reduce.sof containing:

```
objects1.fits          CUBE_OBJECT
objects2.fits          CUBE_OBJECT
sky.fits               CUBE_SKY
```



## **kmo\_stats:** **Basic Statistics**

Recipe name	used in recipe/function	uses recipe/function
kmo_stats	kmo_bkg_sub kmo_sky_tweak kmo_sky_mask	-

Perform basic statistics on a KMOS-conform fits-file.

### **7.3.12.8 Description**

This recipe performs basic statistics on KMOS-conform data-frames of type F2D, F1I, F2I and F3I either with or without noise and RAW. Optionally a 2D mask can be provided to define a region on which the statistics should be calculated on (mask 0: exclude pixel, mask 1: include pixel). A mask can't be provided for statistics on F1I frames.

The output is stored in a vector of length 11. The vector represents following values:

1. Number of pixels
2. Number of finite pixels
3. Mean
4. Standard Deviation
5. Mean with iterative rejection (i.e. mean & sigma are calculated iteratively, each time rejecting pixels more than +/-N sigma from the mean)
6. Standard Deviation with iterative rejection
7. Median
8. Mode (i.e. the peak in a histogram of pixel values)
9. Noise (a robust estimate given by the standard deviation from the negative side of the histogram of pixel values)
10. Minimum
11. Maximum

The same numerical operations are applied to the noise as with the data itself.

### **Basic parameters:**

--ext

These parameters specify with extensions to process. The value 0, which is default, calculates all extensions.

### **Advanced parameters:**

--cpos\_rej

--cpos\_rej

--citer

An iterative sigma clipping is applied in order to calculate the mode. For each position all pixels in the spectrum are examined. If they deviate significantly, they will be rejected according to the conditions:


$val > mean + stdev * cpos\_rej$

and

$val < mean - stdev * cneg\_rej$

In the first iteration median and percentile level are used.

### 7.3.12.9 Flow Chart

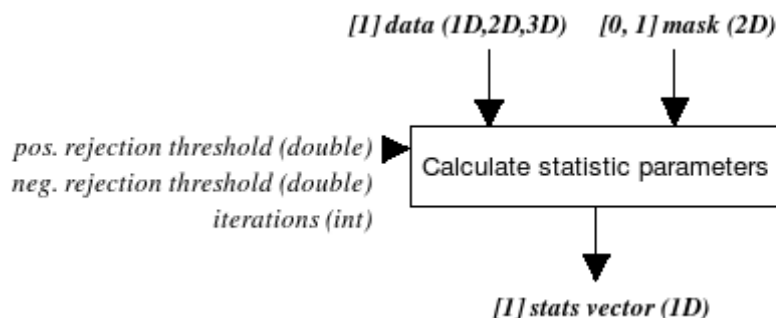

**Figure 49:** Flow chart of the recipe kmo\_stats

The input data and an optional mask (2D) are taken as inputs and a vector of length 11 is returned as output.

### 7.3.12.10 Input Frames

KMOS type	DO category	Amount	Comments
F3I, F2I, F1I, F2D, B2D, RAW	none or any	1	one frame, with or without noise
F2I, F2D, B2D, RAW	none or any	0 or 1	mask <i>(optional)</i>

This recipe also accepts also a path to a FITS file instead of a sof-file.

### 7.3.12.11 Fits Header Keywords

None

### 7.3.12.12 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
ext	int	ext $\geq 0$	0	Specifies which extensions to calculate. 0 calculates them all <i>(optional)</i>

#### Advanced parameters

Name	Type	valid values	Default	Comments
cpos_rej cneg_rej	double	cpos_rej $\geq 0$ , cneg_rej $\geq 0$	3.0 3.0	The positive and negative rejection thresholds for bad pixels <i>(optional)</i>



citer	int	citer $\geq$ 1	3	The number of iterations for kappa-sigma-clipping. <i>(optional)</i>
ifu	int	ifu $\geq$ 0	0	Specifies which extensions to calculate. 0 calculates them all <i>(optional, applies only for F1I, F2I and F3I frames)</i>
det	int	det $\geq$ 0	0	Specifies which extensions to calculate. 0 calculates them all <i>(optional, applies only for F2D and RAW frames)</i>

### 7.3.12.13 Output Frames

KMOS type	DO Category	Comments
F1I	STATS	The calculated statistics parameters

### 7.3.12.14 Examples

```
$ esorex kmo_stats F3I.fits
```

with stats.sof containing:  
F3I.fits DATA

```
$ esorex kmo_stats -ifu=1 stats.sof
```

with stats.sof containing:  
F3I.fits DATA  
F2I.fits MASK

### 7.3.13 **kmo\_fits\_strip:** **Stripping FITS files**

Recipe name	used in recipe/function	uses recipe/function
kmo_fits_strip	-	-

Strip noise, rotator and/or empty extensions from a processed KMOS fits frame.

#### 7.3.13.1 **Description**

With this recipe KMOS fits frames can be stripped in following way:

##### **Basic parameters:**

--noise

All noise extensions will be removed. Only the data extensions remain.

--angle

Applies only to calibration products from kmo\_flat and kmo\_wave\_cal.

All extensions matching provided angle are kept, the others are removed.

Supply a single integer value.

--empty

All empty extensions will be removed.

--extension


Supply a comma-separated string with integer values indicating the extensions to keep. The other extensions are removed (any data or noise information is disregarded, the values are interpreted absolutely)

The parameters --noise, --angle and --empty can be combined.

When --extension is specified, all other parameters are ignored.

When no parameter is provided, no output will be generated.

#### 7.3.13.2 **Flow Chart**

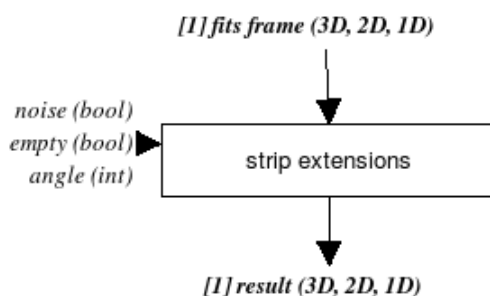

**Figure 50:** Flow chart of the recipe kmo\_fits\_strip

#### 7.3.13.3 **Input Frames**

KMOS type	DO category	Amount	Comments
F3I,	none or any	1	one frame,





F2I, F1I, F2D			with or without noise
---------------------	--	--	-----------------------

This recipe also accepts also a path to a FITS file instead of a sof-file.

### 7.3.13.4 Fits Header Keywords

None

### 7.3.13.5 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
noise	bool	TRUE, FALSE	FALSE	If set to TRUE, all noise extensions are stripped ( <i>optional</i> )
angle	int	angle $\geq 0$ and angle $< 360$	-1	Applies to calibration frames with several rotatr angles included. If set to a valid value only the specified rotator angle is kept, the others are removed
empty	bool	TRUE, FALSE	FALSE	If set to TRUE, all empty extensions are stripped ( <i>optional</i> )
extension	string	e.g. "1,4,6"	""	IFU IDs provided mustn't be bigger than the actual number of extensions ( <i>optional</i> )

### 7.3.13.6 Output Frames

KMOS type	DO Category	Comments
F3I, F2I, F1I, F2D	STRIP	The stripped frame

### 7.3.13.7 Examples

```
$ esorex kmo_fits_strip --noise F3I_data_noise.fits
```

```
$ esorex kmo_fits_strip --empty F3I_data_empty.fits
```

```
$ esorex kmo_fits_strip --angle=120 xcal_HHH.fits
```

## 7.4 Development Recipes

The recipes in this section are intended for use for the pipeline developers. They can be used to setup test cases with individual FITS files. The most interesting recipe for pipeline users might be `kmo_fits_check`. It can be used to display information on a KMOS FITS file.

### 7.4.1 `kmo_dev_setup`: Creating a KMOS-conform FITS file semi-automatically

Recipe name	used in recipe/function	uses recipe/function
<code>kmo_dev_setup</code>	-	<code>kmo_fits_stack</code>

Creates KMOS conform fits-files specific to recipes.

#### 7.4.1.1 Description

This recipe is intended to create KMOS conform files in a semi-automatic manner. It is sufficient to provide a single FITS file and a few parameters to create KMOS conform FITS files suited for different recipes. Internally it calls repeatedly the recipe `kmo_fits_stack`. There are also parameters that allow to prepare the frames, i.e. early test out of the lab, in a way they can be processed.

One extension from the input frame is taken, some noise is added automatically in order to create similar frames for the other extensions.

#### Basic parameters:

`--type`

Defines for which recipe the files should be created.

`--extension`

Defines which extension is used to create frames\n"

`--xshift`

`--yshift`

Shift frames in x and y\n"

`--rotangle`

Sets the ESO OCS ROT OFFANGLE keyword in the primary header.

`--topcrop`

`--bottomcrop`

`--leftcrop`

`--rightcrop`

These are cropping the image (filled with 0).

`--mainkey`

`--subkey`

Add individual keywords to primary- or sub-header

`--valid`

Defines if IFUs are active or inactive



--objects

Defines if IFUs contain object or sky.

--date

Sets the DATE-OBS keyword in the primary header.

--filter

Sets the filter type for all extensions.

--grating

Sets the grating type for all extensions.

#### 7.4.1.2 Flow Chart

None

#### 7.4.1.3 Input Frames

KMOS type	DO category	Amount	Comments
none	any	1	any FITS file with or without extensions

#### 7.4.1.4 Fits Header Keywords

The keywords already present in the provided input FITS files are copied to the output KMOS FITS files. Additional keywords can be added using the --mainkey and --subkey parameters. The keywords provided with mainkey go into the empty primary header, the subkey keywords go into ALL subsequent extensions.

The mainkey and subkey parameters consist of one or several triples. A triple has following order: keyword, type and value. The strings mustn't contain any spaces, the entries have to be separated by a semicolon ( ; ) since entries also can contain commas. Triples are also separated by semicolons.

Example:

mainkey = "DIT;double;1.0;EXPTIME;double; 519.9;WEATHER;string;very\_sunny"

subkey = "CHIP1;bool;1.0;"

Valid types are: string, int, float, double and bool.

#### 7.4.1.5 Configuration Parameters

Name	Type	valid values	Default	Comments
<i>type</i>	string	DARK, DARK_MASTER, FLAT_ON, FLAT_OFF, ARC_ON, ARC_OFF, STD,	-	-



		SKY, GENERIC		
<i>extension</i>	int	$extension \geq 0$	0	FITS extension to process (0: primary, 1, 2,...)
<i>xshift</i> <i>yshift</i>	int	$xshift \geq 0$ , $yshift \geq 0$	0	number of pixels to shift to the right/to the top
<i>rotangle</i>	double	any	-1.0	sets the ESO OCS ROT OFFANGLE keyword in the primary header (CCW)
<i>topcrop</i> <i>bottomcrop</i> <i>leftcrop</i> <i>rightcrop</i>	int	$topcrop \geq 0$ , $bottomcrop \geq 0$ , $leftcrop \geq 0$ , $rightcrop \geq 0$	0	number of rows or columns to crop
<i>mainkey</i> <i>subkey</i>	string		-	Additional keywords for primary or subheaders ( <i>optional</i> )
<i>valid</i>	string			Specify which IFUs are active. Either empty string or string with 8 elements (ones or zeros) e.g: [1;0;1;0;0;...;1] ( <i>optional</i> )
<i>objects</i>	string			(STD only): Specify which IFUs contain objects. Either empty string or string with 8 elements (ones or zeros) e.g: [1;0;1;0;0;...;1] ( <i>optional</i> )
<i>date</i>	string			(STD only): Specify the date to save into DATE- OBS e.g: [2010-01- 31T11:53:15.9789] ( <i>optional</i> )
<i>filter</i>	string	"H", "HK", "IZ", "K", "YJ"	-	-
<i>grating</i>	string	"H", "HK", "IZ", "K", "YJ"	-	-

--objects defines if IFUs contain object or sky  
--date sets theDATE-OBS keyword in the primary header  
--filter sets the filter type for all extensions  
--grating sets the grating type for all extensions

## 7.4.1.6 Output Frames

KMOS type	DO Category	Comments
-----------	-------------	----------



RAW, F2D, B2D, F3I, F2I, F1I, F1S, F1L or F2L	depending on --type parameter	Stacked KMOS FITS file
--	-------------------------------	------------------------

### 7.4.1.7 Examples

```
#!/bin/bash
```

```
darkpath=raw_data/darksim.fits
flatpath=raw_data/flatsim.fits
arcpath=raw_data/arcsim.fits
skypath=raw_data/skysim.fits
speccsimpath=raw_data/speccsim.fits
stdpath=raw_data/stdsim.fits
```

```
extension=0
valid="1;1;1;1;1;1;1;1"
filter="H"
grating="H"
rotangle=0.0
```

```
sub_key="ESO DET CHIP GAIN;double;1.1;ESO DET CHIP RON;double;0.1"
main_key_arc="ESO INS LAMP1 ST;bool;1"
```

```
# DARK BIAS
```

```
esorex kmo_dev_setup --type=DARK --rotang=$rotangle --ext=$extension
--valid=$valid $darkpath
```

```
# DARK MASTER
```

```
esorex kmo_dev_setup --type=DARK_MASTER --rotang=$rotangle
--ext=$extension --valid=$valid
--subkey="$sub_key" $darkpath
```

```
# FLAT_ON
```

```
esorex kmo_dev_setup --type=FLAT_ON --rotang=$rotangle --ext=$extension
--valid=$valid --filt=$filter --grat=$grating
--subkey="$sub_key" $flatpath
```

```
# FLAT_OFF
```

```
esorex kmo_dev_setup --type=FLAT_OFF --rotang=$rotangle
--ext=$extension --valid=$valid --filt=$filter
--grat=$grating $darkpath
```

```
# ARC_ON
```

```
esorex kmo_dev_setup --type=ARC_ON --rotang=$rotangle --ext=$extension
--valid=$valid --filt=$filter --grat=$grating
--mainkey="$main_key_arc" --subkey="$sub_key"
$arcpath
```



```
# ARC_OFF
esorex kmo_dev_setup --type=ARC_OFF --rotang=$rotangle --ext=$extension
                        --valid=$valid --filt=$filter --grat=$grating
                        --subkey="$sub_key" $darkpath

# SKY
esorex kmo_dev_setup --type=SKY --rotang=$rotangle --ext=$extension
                        --valid=$valid --filt=$filter --grat=$grating
                        $skypath

# SPECSIM
esorex kmo_dev_setup --type=GENERIC --rotang=$rotangle --ext=$extension
                        --valid=$valid --filt=$filter --grat=$grating
                        $specsimpath

# STD OBJ
esorex kmo_dev_setup --type=STD --rotang=$rotangle --ext=$extension
                        --valid=$valid --date="2011-01-12T11:10:00.0000"
                        --objects="0;1;0;0;1;0;0;0" --filt=$filter
                        --grat=$grating --subkey="$sub_key" $stdpath
mv std_123.fits std_obj_123.fits

# STD SKY
esorex kmo_dev_setup --type=STD --rotang=$rotangle --ext=$extension
                        --valid=$valid --date="2011-01-12T11:12:00.0000"
                        --objects="0;0;0;0;0;0;0;0" --filt=$filter
                        --grat=$grating --subkey="$sub_key" $skypath
mv std_123.fits std_sky_123.fits
```



### 7.4.2 **kmo\_fits\_check:** **Check FITS files**

Recipe name	used in recipe/function	uses recipe/function
kmo_fits_check	-	-

Check contents of a KMOS fits-file.

#### 7.4.2.1 **Description**

Recipe to print information on FITS files, contained data/noise values or header keywords of all extensions of a fits file, preferably a KMOS fits-file (RAW, F1I, F2I, F3I, F2D etc.). This recipe is intended for debugging purposes only.

By default a short summary is printed.

The following data types of keywords are recognized: bool, char, double, float, int, long, string  
As input one fits-file is accepted, no output frame is generated.

#### **Basic parameters:**

--h

With this parameter just the header keywords are printed:

- 1 prints the primary header and the headers of all the extensions
- 0 prints just the primary header
- 1 prints the header of the first extension etc.

--d

With this parameter just the data (or depending on the extension: noise) is printed:

- 1 prints the primary header and the headers of all the extensions
- 0 prints data of the primary header which is empty for KMOS FITS frames
- 1 prints the data/noise of the first extension etc.

This parameter should only be used with very small datasets, otherwise the screen will be flooded with numbers.

#### 7.4.2.2 **Flow Chart**

None

#### 7.4.2.3 **Input Frames**

KMOS type	DO category	Amount	Comments
any	none or any	1	any FITS file (also non-KMOS frames)

This recipe also accepts also a path to a FITS file instead of a sof-file.

#### 7.4.2.4 **Fits Header Keywords**

None specific

#### 7.4.2.5 **Configuration Parameters**

##### **Basic parameters**

Name	Type	valid values	Default	Comments
------	------	--------------	---------	----------



<i>h</i>	int	$-1 \leq h$	-2	<i>(optional)</i>
<i>d</i>	int	$-1 \leq d$	-2	<i>(optional)</i>

The defaults of -2 for h and d lead to printing the short summary. This value can't be provided manually.

## 7.4.2.6 Output Frames

None

## 7.4.2.7 Examples

print summary:

```
$ esorex kmo_fits_check test.fits
```

print all headers:

```
$ esorex kmo_fits_check --h=-1 test.fits
```

print primary header:

```
$ esorex kmo_fits_check --h=0 test.fits
```

print primary data extension (which should always be empty for KMOS FITS files):

```
$ esorex kmo_fits_check --d=0 test.fits
```

print 5<sup>th</sup> data extension:

```
$ esorex kmo_fits_check --d=5 test.fits
```





### 7.4.3 **kmo\_fits\_stack:** **Creating a KMOS-conform FITS file manually**

Recipe name	used in recipe/function	uses recipe/function
kmo_fits_stack	-	-

Creates KMOS conform fits-files.

#### 7.4.3.1 **Description**

FITS files to be processed by the KMOS pipeline have to meet certain conditions. This recipe is intended to provide to the user a simple way to test the pipeline with own data, which wasn't produced by KMOS itself.

The input set of frame is checked for integrity (do all the frames have the same size, do they correspond to the desired output type, is there the correct number of files). Then an empty main header is written with desired keywords. A keyword consists of the name, data type and value. Additional keywords can be added either to the empty primary header or to all sub headers.

#### **Basic parameters:**

--category

Set to TRUE if DFS header keywords should be generated. In this case the --subkey parameter is ignored and "kmos\_" is added as prefix to created filenames.

--type

Depending on the type of the FITS file to create different combinations of frames have to be provided:

- **RAW**  
exactly 3 files tagged as DATA
- **F2D**  
exactly 3 files tagged as DATA or  
exactly 6 files tagged alternating as DATA and NOISE (beginning with DATA)
- **B2D**  
exactly 3 files tagged as BADPIX
- **F1I, F2I, F3I**  
as many DATA frames as wanted (at least one) or  
as many DATA and NOISE frames as wanted (at least one of each, the number of DATA frames has to match the one of NOISE frames)
- **F1S**  
exactly 1 file tagged as DATA
- **F1L**  
exactly 1 file tagged as DATA (either plain text or binary fits table)
- **F2L**  
exactly 1 file tagged as DATA (either plain text or binary fits table)

--mainkey

--subkey



Additional keywords can be added either to the empty primary header or to all sub headers. Provided keywords must have following form: "keyword;type;value;keyword;type;value" (no spaces inbetween!)

Allowed values for type are: string, int, float, double, bool

--valid

With the --valid parameter one can specify which values should be handled as invalid by the pipeline. The keyword ESO OCS ARMi NOTUSED will be set accordingly.

### 7.4.3.2 Flow Chart

None

### 7.4.3.3 Input Frames

KMOS type	DO category	Amount	Comments
none	STACK_DATA	≥1	data frames

KMOS type	DO category	Amount	Comments
none	STACK_DATA	≥1	data frames
none	STACK_NOISE	≥1	noise frames (same number as data frames)

KMOS type	DO category	Amount	Comments
none	STACK_BADPIX	3	badpixel frames

### 7.4.3.4 Fits Header Keywords

The keywords already present in the provided input FITS files are copied to the output KMOS FITS files. Additional keywords can be added using the --mainkey and --subkey parameters. The keywords provided with mainkey go into the empty primary header, the subkey keywords go into ALL subsequent extensions.

The mainkey and subkey parameters consist of one or several triples. A triple has following order: keyword, type and value. The strings mustn't contain any spaces, the entries have to be separated by a semicolon ( ; ) since entries also can contain commas. Triples are also separated by semicolons.

Example:

mainkey = "DIT;double;1.0;EXPTIME;double; 519.9;WEATHER;string;very\_sunny"

subkey = "CHIP1;bool;1.0;"

Valid types are: string, int, float, double and bool.

### 7.4.3.5 Configuration Parameters

#### Basic parameters

Name	Type	valid values	Default	Comments
type	string	"RAW", "F2D", "B2D",	"	(mandatory)



		"F3I", "F2I", "F1I", "F1S", "F1L", "F2L"		
<i>filename</i>	string	Any	"fits_stack"	suffix ".fits" will be added (optional)
<i>mainkey</i>	string	"keyword;type;value"	""	(optional)
<i>subkey</i>	string	"keyword;type;value"	""	(optional)
<i>valid</i>	string	empty string or string with 24 elements (either ones or zeros), e.g. [1;0;1;1;1;0;0;0;...;1]	""	(optional)

### 7.4.3.6 Output Frames

KMOS type	DO Category	Comments
RAW, F2D, B2D, F3I, F2I, F1I, F1S, F1L or F2L	FITS_STACKER	Stacked KMOS FITS file

### 7.4.3.7 Examples

```
$ esorex kmo_fits_stack --type="RAW" --filename="my_raw" raw.sof
```

with raw.sof containing:

```
data1.fits    STACK_DATA
data2.fits    STACK_DATA
data3.fits    STACK_DATA
```

```
$ esorex kmo_fits_stack --type="F2D" --filename="my_f2d"
--mainkey="EXPTIME;double;3.0" f2d.sof
```

with f2d.sof containing:

```
data1.fits    STACK_DATA
data2.fits    STACK_DATA
data3.fits    STACK_DATA
```

```
$ esorex kmo_fits_stack --type="F1I" --filename="my_f1i" f1i.sof
```

with f1i.sof containing:

```
data_vector1.fits    STACK_DATA
noise_vector1.fits    STACK_NOISE
data_vector2.fits    STACK_DATA
noise_vector2.fits    STACK_NOISE
```

```
$ esorex kmo_fits_stack --type="B2D" --filename="my_badpix" badpix.sof
```

with badpix.sof containing:

```
badpix1.fits    STACK_BADPIX
badpix2.fits    STACK_BADPIX
```



badpix3.fits      STACK\_BADPIX

```
$ esorex kmo_fits_stack --type="F1S" --filename="my_f1s" f1s.sof
```

with f1s.sof containing:  
data\_vector.fits      STACK\_DATA

```
$ esorex kmo_fits_stack --type="F1L" --filename="my_f1l" f1l.sof
```

with f1l.sof containing:  
two\_columns\_ascii.txt      STACK\_DATA

```
$ esorex kmo_fits_stack --type="F2L" --filename="my_f2l" f2l.sof
```

with f2l.sof containing:  
three\_columns\_ascii.txt      STACK\_DATA

## 8 Data Reduction Library Functions

All recipes described in Section 7 are implemented as functions with similar names inside the library. Their descriptions have not been repeated here. By implementing them as functions allows one to create an appropriate simple wrapper so that they can be used either as recipe plugins or for use within KMCLIPM, without having to repeat the functional part of the code.

In addition, there are a few extra functions, which are defined as such because they are used repeatedly in various recipes or fulfil another special task. These are the functions described explicitly in this chapter.

### 8.1 Acquisition Reduction for RTD

Recipe name	used in recipe/function	uses recipe/function
kmclipm_rtd_image	-	kmo_make_image kmo_fit_profile kmo_reconstruct

kmclipm\_rtd\_image is intended to be used only by the Instrument Control Software (ICS). In order to use it the function

```
kmclipm_set_cal_path(const char *path, int test_mode)
```

has to be called once, defining the path where the xcal-, ycal- and lcal-calibration files are stored and whether we are in test mode (default: `test_mode = FALSE`) or not.

The calibration files are generated using the recipes `kmo_flat` and `kmo_wave_cal` (see Sec. 7.1.2 and 7.1.3) and have manually to be copied to the specified directory in order to use the real time display (RTD) in ICS.

To create the necessary raw frames for the above mentioned recipes, the templates

```
KMOS_spec_cal_calunit and  
KMOS_spec_cal_wave
```

have to be executed. There the number of rotator offsets has to be specified (for the moment being 6 offsets are recommended). So we get for 5 bands and 6 angles and 3 different calibration files a total of 90 calibration files.

The naming of the calibration files follows this convention:

e.g. xcal\_xxx\_yyy\_z.fits

x: grating for every detector


y: filter for every detector

z: rotator angle

#### 8.1.1 Description

In general, only a few bright stars are observed with a few IFUs (with short DIT). The other IFUs point to faint objects that will not necessarily be visible with the short DIT used for acquisition. Thus a vector is provided indicating the IFUs, which are to be processed. However, in some cases, the calculations and image reconstruction will be performed for all IFUs (initial tests, calibrations, etc).

### 8.1.2 Flow Chart

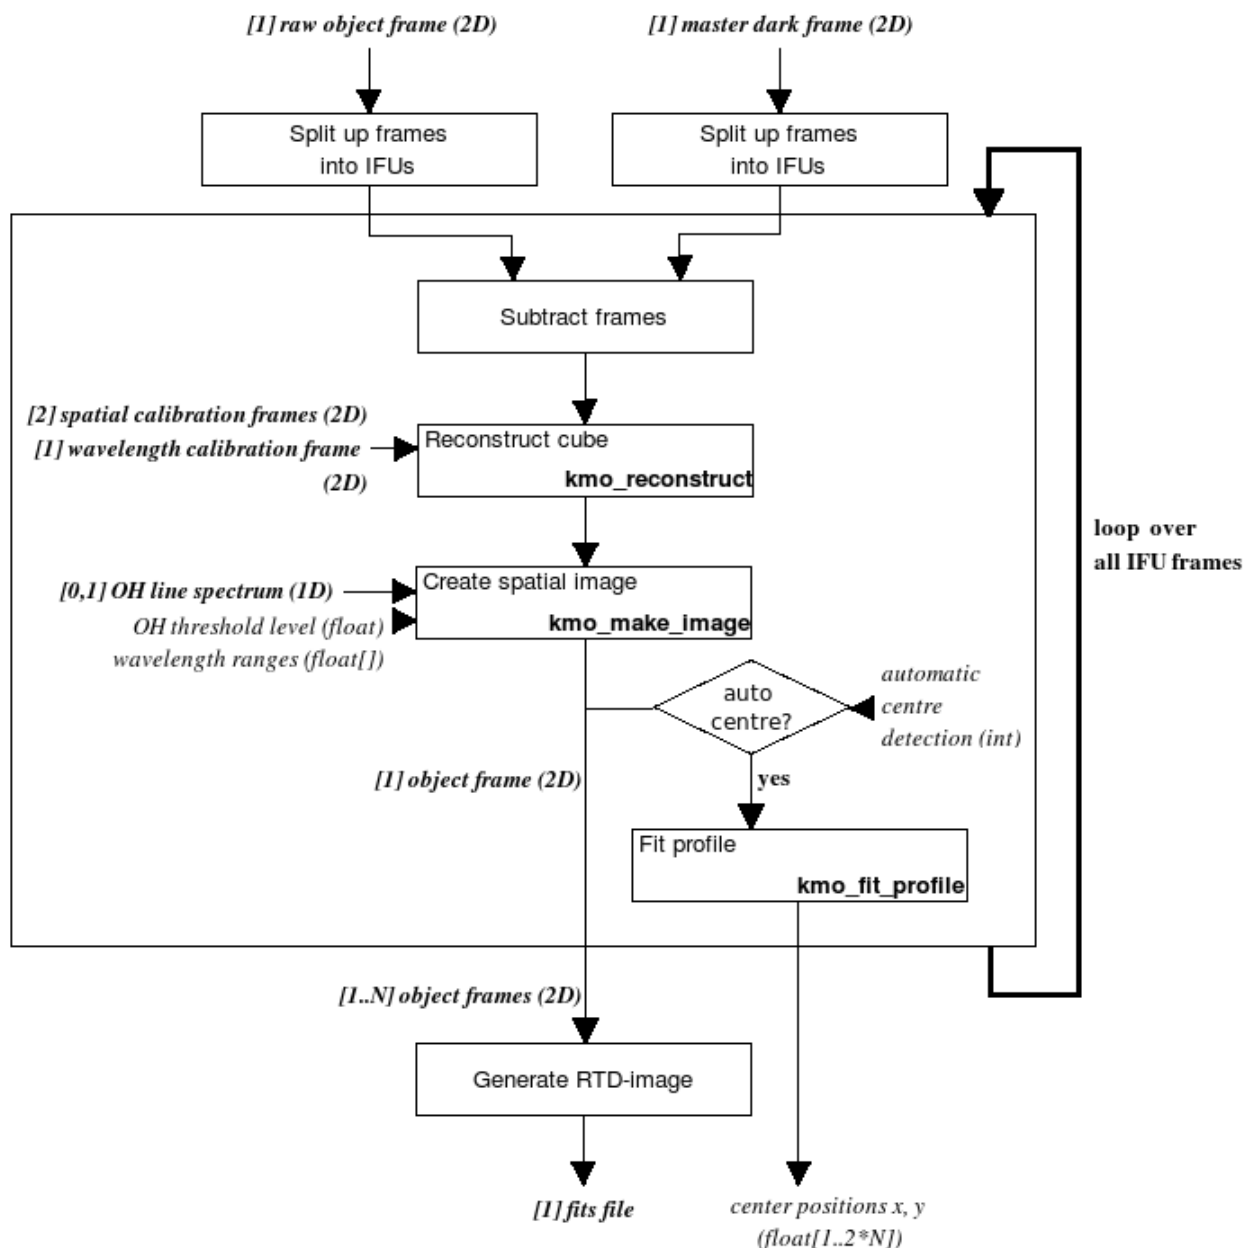

**Figure 51:** Flow chart of the recipe `kmo_rtd_image`

The processing steps are:

1. From the raw object frame and the master dark (or a specified sky frame) the desired IFU frame is extracted.
2. The two IFU frames are subtracted.
3. The resulting frame is reconstructed into a cube using the bad pixel mask, the spectral curvature calibration frame and the wavelength calibration frame.
4. The cube is collapsed along the spectral axis within specified wavelength range. If required wavelengths across OH sky emission lines are omitted.
5. If automatic centres are required, they will be extracted now. The resulting x- & y-values are stored in a vector.
6. The steps above are repeated for each IFU to process.
7. The resulting images are merged into a single combined image.

## 8.2 Combine frames using pixel rejection

Recipe name	used in recipe/function	uses recipe/function
kmclipm_combine_frames	kmo_dark kmo_flat kmo_illumination	-

Combines data frames with or without noise and either (re)calculates or propagates noise.

### 8.2.1 Description

This function is always used when several input frames have to be combined into one. For each pixel position the pixel values at this position of every frame are put into a vector. This vector is to be averaged according one of the following methods available:

- Kappa-sigma clipping  
Any value of the vector which deviates significantly will be rejected. This method is iterative.  
( $\text{value} > \text{mean} + \sigma * \text{pos\_rejection\_threshold}$  or  
 $\text{value} < \text{mean} - \sigma * \text{neg\_rejection\_threshold}$ )  
In the first iteration median and percentile level are used.
- Min-max clipping  
The specified number of minimum and maximum values of the vector will be rejected. This method is applied once.
- Average  
The average of all values of the vector is calculated.
- Median  
The median of all values of the vector is calculated.
- Sum  
The sum of all values of the vector is calculated.

The above mentioned methods act all the same regardless the number of input data frames. For reasonable noise estimations it is recommended to provide at least three or more frames. If less than three frames are provided the noise estimation is performed as depicted in Table 1 below.

## 8.2.2 Flow Chart

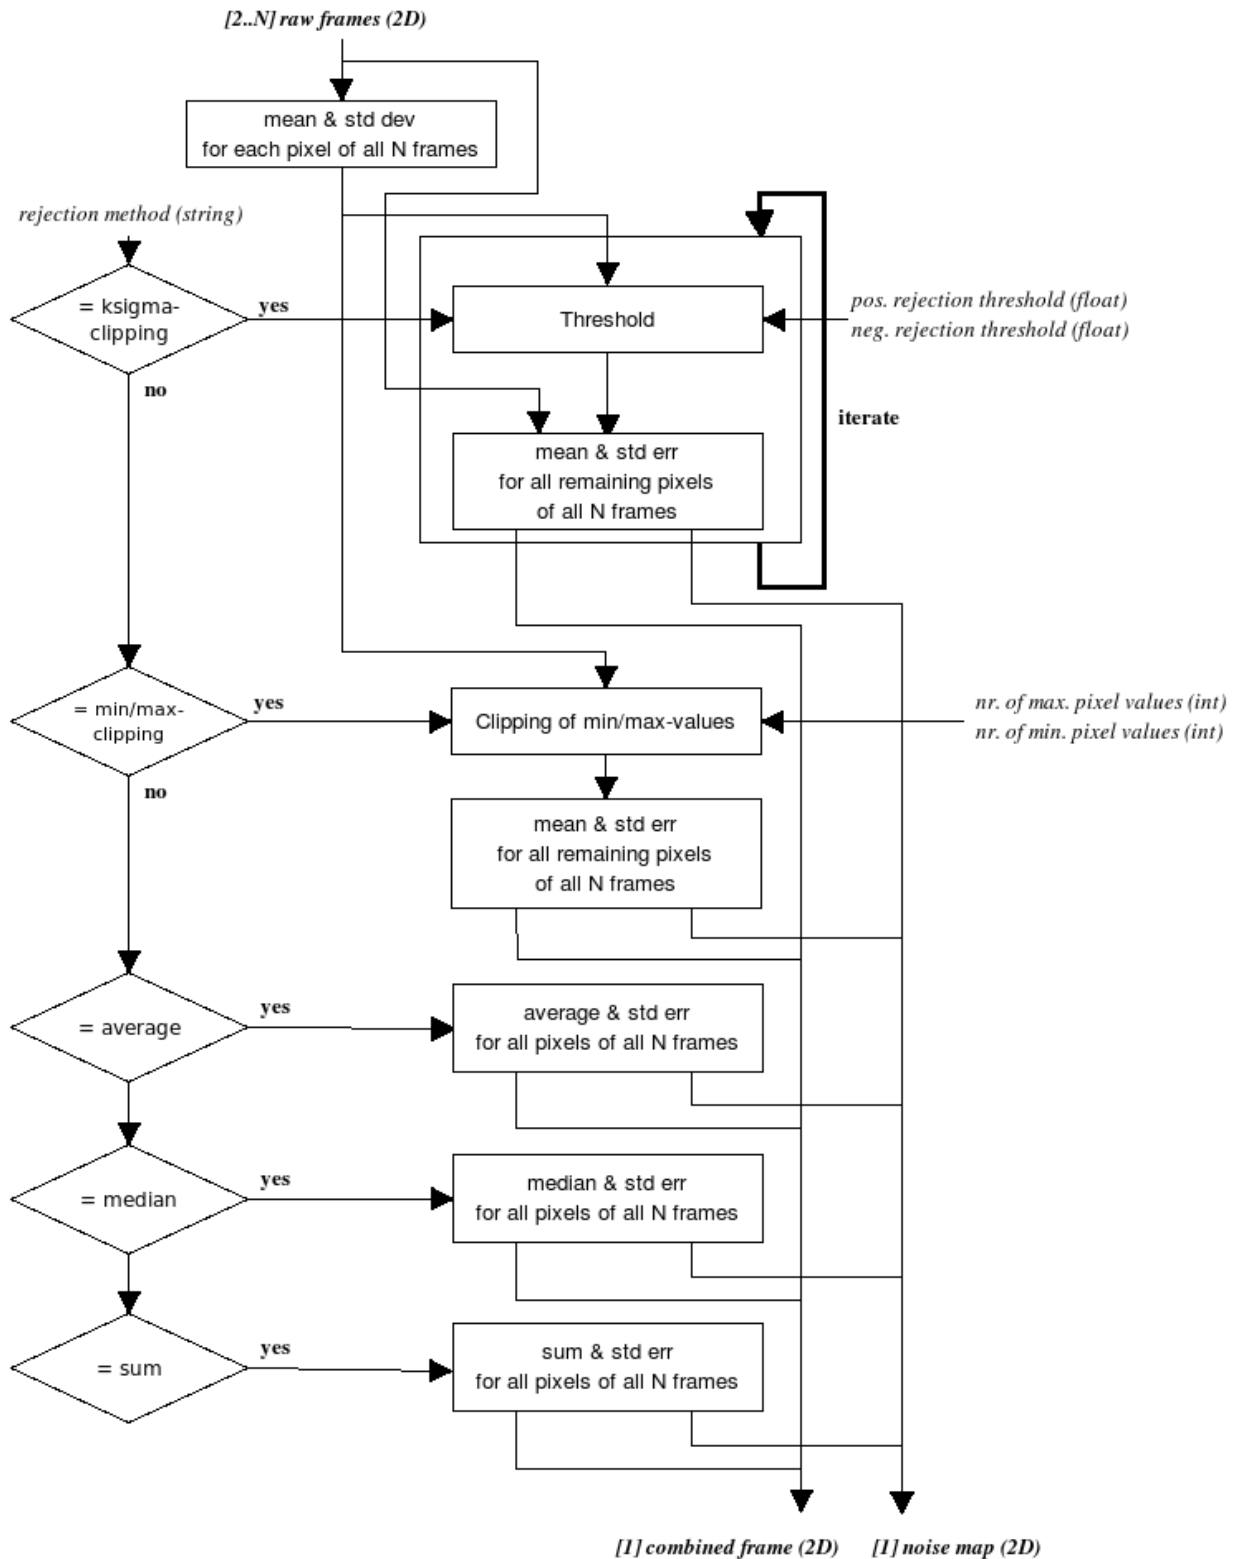


Figure 52: Flow chart for `kmclipm_combine_frames`



The processing steps are:

1. Depending on the method chosen the frames will be combined differently:
  - a. Kappa-sigma clipping
    - i. Two thresholds are calculated
    - ii. All pixels above or below the thresholds are rejected
    - iii. These steps are repeated as many times as desired
  - b. Min-max clipping
    - i. The desired number of minimum and maximum values is clipped
  - c. Average
    - i. For all pixel positions the average of the values is calculated
  - d. Median
    - i. For all pixel positions the median of the values is calculated
  - e. Sum
    - i. For all pixel positions the sum of the values is calculated

	$\geq 3$ frames	2 frames	1 frame
<b>with noise<sub>in</sub></b>	$\text{avg}_{\text{data}} = \text{combine}(\text{data}_{\text{in}})$ <p><b><i>for 'median' method:</i></b></p> $\text{avg}_{\text{noise}} = \frac{\text{stdev}_{\text{median}}(\text{data}_{\text{in}})}{\sqrt{n}}$ <p><b><i>for all other methods:</i></b></p> $\text{avg}_{\text{noise}} = \frac{\text{stdev}(\text{data}_{\text{in}})}{\sqrt{n}}$	$\text{avg}_{\text{data}} = \text{combine}(\text{data}_{\text{in}})$ <p><b><i>for 'sum' method:</i></b></p> $\text{avg}_{\text{noise}} = \sqrt{\frac{\text{noise}_{\text{in}1}^2 + \text{noise}_{\text{in}2}^2}{2}}$ <p><b><i>for all other methods:</i></b></p> $\text{avg}_{\text{noise}} = \frac{1}{2} \sqrt{\frac{\text{noise}_{\text{in}1}^2 + \text{noise}_{\text{in}2}^2}{2}}$	$\text{avg}_{\text{data}} = \text{data}_{\text{in}}$ $\text{avg}_{\text{noise}} = \text{noise}_{\text{in}}$
<b>w/o noise<sub>in</sub></b>	$\text{avg}_{\text{data}} = \text{combine}(\text{data}_{\text{in}})$ $\text{avg}_{\text{noise}} = \frac{\text{stdev}(\text{data}_{\text{in}})}{\sqrt{n}}$	$\text{avg}_{\text{data}} = \text{combine}(\text{data}_{\text{in}})$ $\text{avg}_{\text{noise}} = \frac{ \text{data}_{\text{in}1} - \text{data}_{\text{in}2} }{\sqrt{2}}$	$\text{avg}_{\text{data}} = \text{data}_{\text{in}}$ $\text{avg}_{\text{noise}} = \text{stdev}(\text{data}_{\text{in}})$

**Table 1** The function *combine()* stands for *kmclipm\_combine\_frames()* and handles the input data as described above. *n* is the number of input frames.

## 8.3 Scientific reconstruction of a data cube

Recipe name	used in recipe/function	uses recipe/function
<code>kmo_reconstruct_sci</code>	<code>kmo_std_star</code> <code>kmo_sci_red</code>	<code>kmo_noise_map</code> <code>kmo_reconstruct</code>


Reconstructing cubes using noise estimation and master flat frame.

### 8.3.1 Description

This function reconstructs a data cube in a scientific manner, taking into account a sky or dark frame and a flat frame, as opposed to `kmo_reconstruct` which just stacks up the slitlets to form a data cube. The function gets the whole frames as input and extracts the part with the desired IFU and returns the reconstructed cube with noise. The flow chart doesn't show the splitting of the frames into IFU frames.

This function is used in the higher level recipe `kmo_sci_red`.

### 8.3.2 Flow Chart

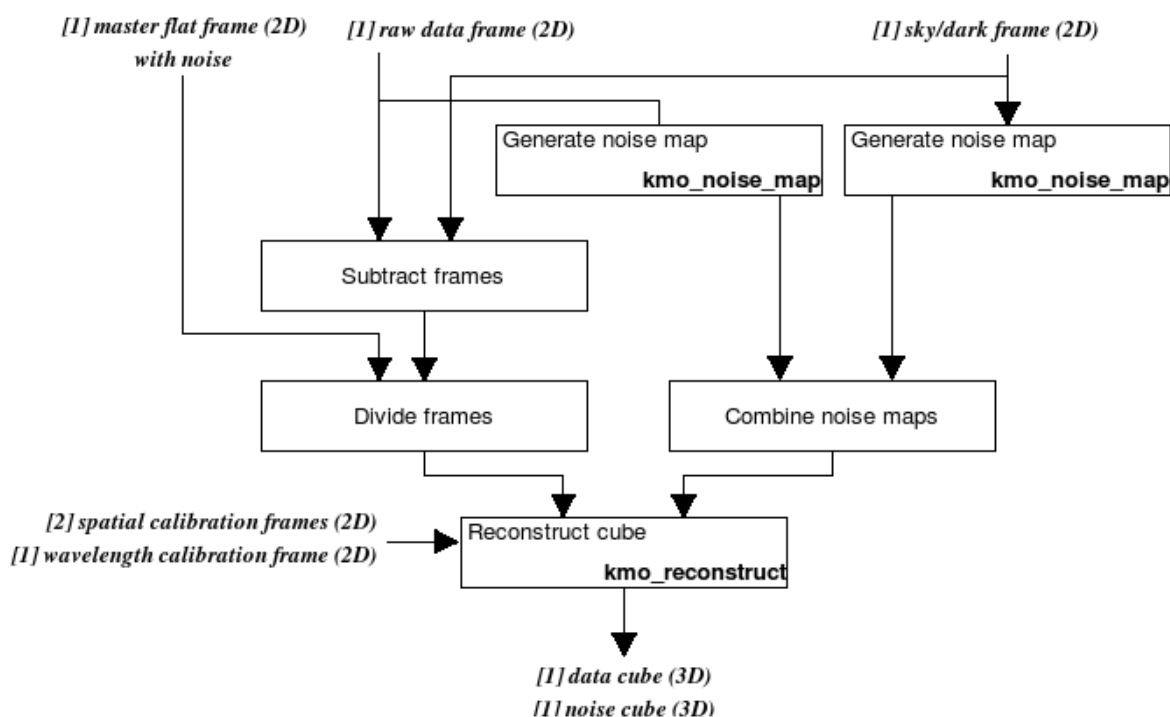

**Figure 53:** Flow chart for `kmo_reconstruct_sci`

The processing steps are:

1. The data frame and the sky (or dark) frame are subtracted and divided by the master flat field.
2. The noise of the data frame and the sky (or dark) frame are generated using `kmo_noise_map`.
3. The noise of the three frames (the noise of the master flat frame has already been calculated in `kmo_flat`) is combined according the operations performed in step 1.
4. The resulting 2D data and noise frame are reconstructed into a cube using the three calibration frames

## PART III: DRS MAINTAINANCE & DEVELOPMENT

In this section different aspects regarding the creation of new calibration data and the maintainance of the KMOS DRS pipeline for further development are described.

### 9 Updating the Calibration Data

After instrument maintainance or after a warming up/cooling down-cycle the instrument, the arms and spectrographs are expected to have different characteristics than before. In this case it is strongly recommended to renew the calibration files. Manipulation of the arms particularly affects all spatial calibration files (BADPIXEL\_DARK, BADPIXEL\_FLAT, FLAT\_EDGE, ILLUM\_CORR, MASTER\_DARK, MASTER\_FLAT, TELLURIC, XCAL, YCAL), manipulation of the spectrographs affects all spectral calibrations (WAVE\_BAND, REF\_LINES, LCAL, ILLUM\_CORR, TELLURIC).

Besides this the spatial and spectral calibration frames are expected to be stable in time. So we recommend to renew these files every few months to a year (exact intervals have to be defined during operation) in normal operating conditions.

#### 9.1 Standard Data Handling at the VLT

As depicted in Figure 54, the standard workflow for obtaining exposures follows the solid blue arrows from top to bottom. The user triggers any template on the IWS which in succession generates arbitrary exposures. These are sent to the PWS where they are automatically archived and processed by the DO and the DRS. The raw frames and the products are copied to the OWS as well mirrored to ESO Garching.


The PWS acts as a sort of master in this scenario on which the other workstations depend on. It is asserted that the raw frames, products and calibration data are kept synchronized on the OWS. In fact all steps described above are standard ones and apply to all instruments at the VLT.

Following the standard way at ESO, the QC department creates new calibration files and will copy them to the PWS.

Due to the huge amount of calibration data, ESO at Paranal will create new calibration data from KMOS on its own to avoid the lengthy data transfer from Garching to Paranal.

#### **Regarding KMOS an additional step has to be performed:**

A subset of the Calib DB on the PWS has to be kept synchronized on the IWS (dashed orange arrow). The ESO DHA has to assert this.

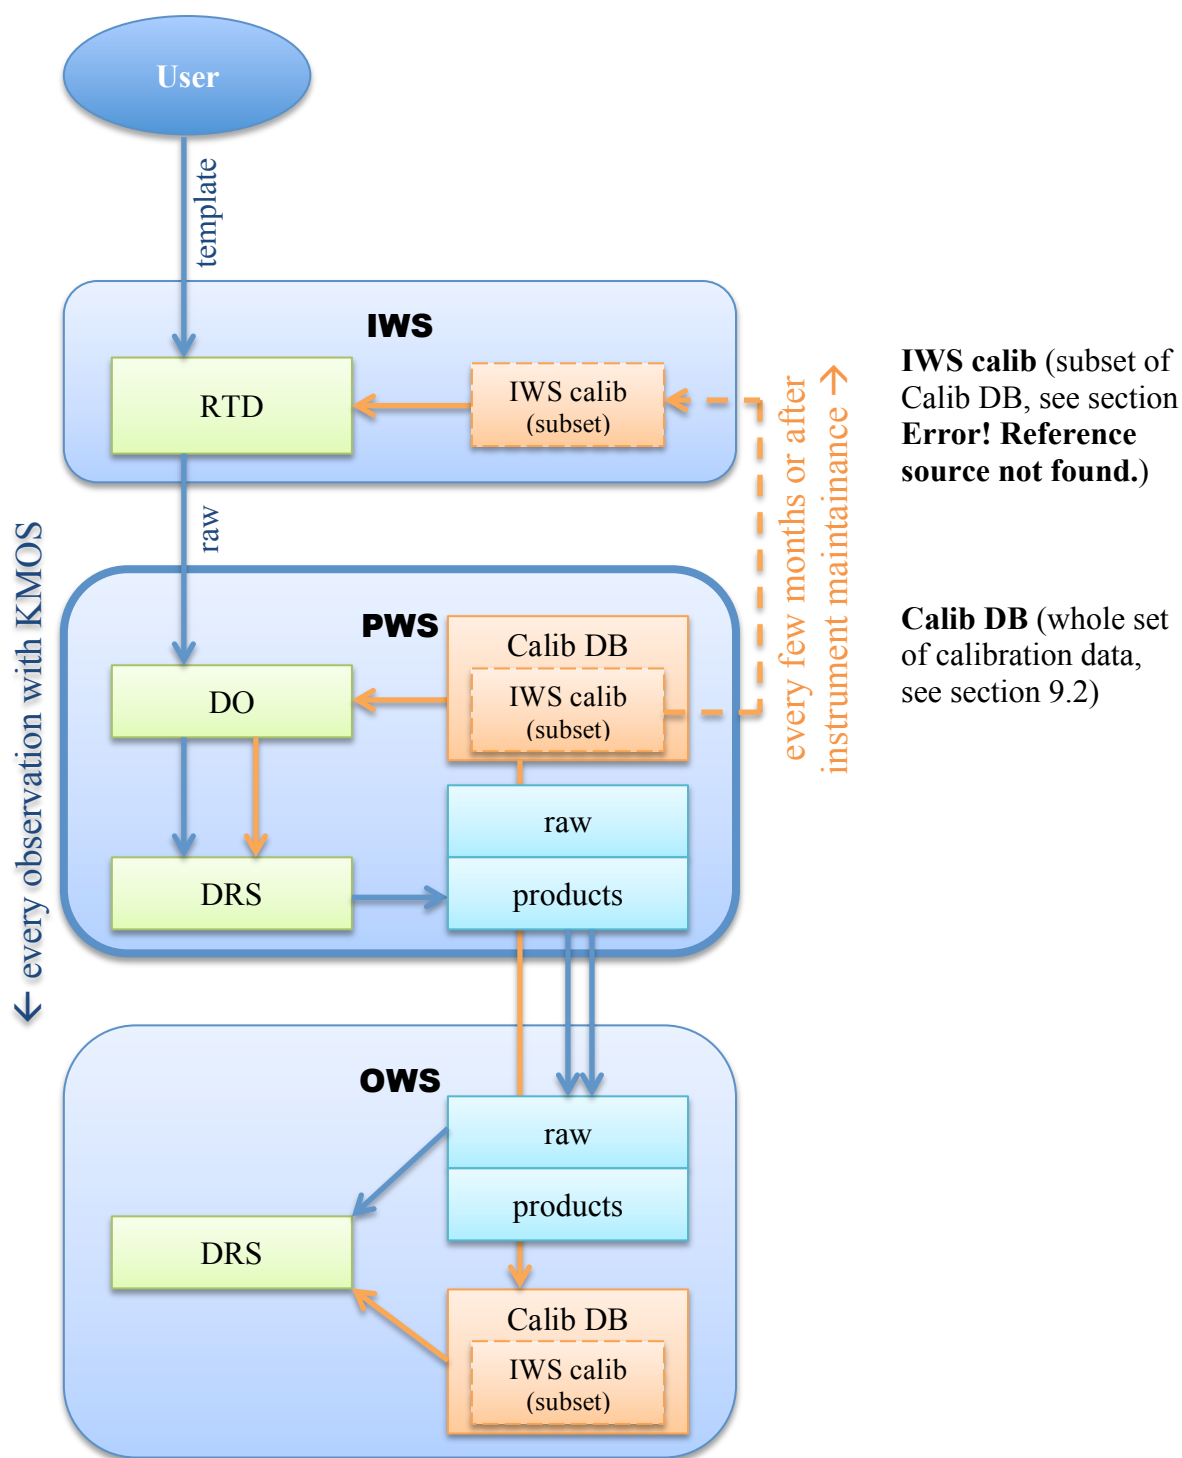

IWS: Instrument Workstation  
PWS: Pipeline Workstation  
(or Online Workstation)  
OWS: Offline Workstation

Karma: OB Preparation Tool  
RTD: Real Time Display  
DO: Data Organiser  
DRS: Data Reduction Software

**Figure 54** Standard data flow at the VLT

## 9.2 Alphabetical listing of all calibration files

There are 5 bands (H, HK, IZ, K, YJ). For each band there are 6 rotator angles (0, 60, 120, 180, 240, 360 degrees). Therefore the band-specific calibrations will amount to 15 files.<sup>1</sup>

The “Calib DB” depicted in Figure 54 consists of the frames listed below:

PRO CATG	size	#	comments
ARC_LIST	8.5 KB	5	Arcline lists
ATMOS_MODEL	35 KB	5	Atmospheric models
BADPIXEL_DARK	48 MB	1	Badpixel frame
BADPIXEL_FLAT	289 MB	5	Badpixel frame after flat-fielding
FLAT_EDGE	1.5 MB	5	Table with edge fitting parameters
LCAL	289 MB	5	Spectral calibration file
MASTER_DARK	97 MB	1	Master dark frame
MASTER_FLAT	577 MB	5	Master flat frames
OH_SPEC	300 KB	5	
REF_LINES	8.5 KB	1	Table with arcline fitting parameters
SOLAR_SPEC	50 KB	5	Solar spectra
SPEC_TYPE_LOOKUP	8.5 KB	1	Spectral lookup table
XCAL	289 MB	5	Spatial calibration file No. 1
YCAL	289 MB	5	Spatial calibration file No. 2
WAVE_BAND	8.5 KB	1	Fits table with start-/end-values of wavebands
<b>Σ</b>	<b>8.8 GB</b>	<b>55 files</b>	

### 9.2.1 Subset of calibration files needed for Karma and RTD (kmclipm)

The “IWS calib (subset)” consists of a subset of above frames:

PRO CATG	size	#	comments
LCAL	289 MB	5	<b>Important:</b> on IWS the original filenames have to be used and not the archived filenames (e.g. lcal_HHH_HHH.fits and kmos_wave_band.fits)
XCAL	289 MB	5	
YCAL	289 MB	5	
WAVE_BAND	8.5 KB	1	

<sup>1</sup> The filter resp. grating setting can be extracted from following keywords (It is guaranted by the ICS that these keywords always contain the same value):

ESO INS FILT1 ID	ESO INS GRAT1 ID
ESO INS FILT2 ID	ESO INS GRAT2 ID
ESO INS FILT3 ID	ESO INS GRAT3 ID

The rotator angle can be extracted from:

ESO OCS NAANGLEx



# Data Reduction Library Design & Manual

Doc No: VLT-MAN-KMO-146611-007  
Version: 2.7  
Author: A. Agudo Berbel, E. Wiezorrek,  
R. Davies, N. Förster Schreiber,  
Date: 07.08.2013

**$\Sigma$**

**4.3 GB**

**16 files**

## 9.3 Calibration Schedule

### 9.3.1 Every few months to a year or after instrument maintainance

<b>BADPIXEL_DARK</b>	<b>MASTER_DARK</b>	<b>XCAL</b>
<b>BADPIXEL_FLAT</b>	<b>MASTER_FLAT</b>	<b>YCAL</b>
<b>FLAT_EDGE</b>	<b>TELLURIC</b>	<b>LCAL</b>
<b>ILLUM_CORR</b>		

These calibration frames can be produced using the KMOS data reduction pipeline. As input data new calibration exposures have to be produced using the following ICS templates with default settings (the templates switch the filters and gratings automatically where appropriate):

Template ID	DO category	Associated recipe	DO category
KMOS_spec_cal_dark <sup>2</sup>	DARK	kmo_dark	MASTER_DARK BADPIXEL_DARK
KMOS_spec_cal_unit <sup>3</sup>	FLAT_ON FLAT_OFF	kmo_flat	MASTER_FLAT BADPIXEL_FLAT XCAL YCAL FLAT_EDGE
KMOS_spec_cal_wave <sup>3</sup>	ARC_ON ARC_OFF	kmo_wave_cal	LCAL DET_IMAGE_WAVE

To check the quality of the calibration frames the QC parameters can be checked and compared to former values, best to be stored in an external database. Additionally a quick visual check consists of looking at the generated DET\_IMG\_WAVE frames from kmo\_wave\_cal-recipe. Obvious errors in the wavelength calibration are easy to identify.

The estimated execution time for the first three templates involved in this procedure is about 3.5 hours. About the same time is needed to execute the associated pipeline recipes.

### 9.3.2 After instrument maintainance

#### 9.3.2.1 WAVE\_BAND

This file (and as well the ones described in section 9.3.3) can be updated using the DRS pipeline and a text file containing the actual values. In order to assert that all relevant keywords are set correctly a script called `calib_creator.sh` is provided in `kmosp/catalogs`. The according call looks like this:

```
$ calib_creator.sh WAVE_BAND ref/wave_band.txt
```

The sample script `create_all.sh` shows the rather self explaining usage. All needed reference files are located in the directory `kmosp/catalogs/ref`. The text files there can either be edited manually with a text editor or easily be re-created using the ESO tool `dtfits`:

<sup>2</sup> single execution at any rotator angle

<sup>3</sup> multiple executions at following rotator angles: 0, 60, 120, 180, 240, 300 degrees

```
$ dtfits -s ' ' kmos-calib/kmos_wave_band.fits > ref/wave_band.txt
```

The newly created static calibration frame must be committed to the CVS repository kmos-calib, as well the updated reference file in directory kmosp/catalogs/ref must be committed into the CVS repository kmosp.

The exact command issued by `calib_creator.sh` to create a WAVE\_BAND frame is:

```
$ esorex kmo_fits_stack \
  --type="F2L" \
  --filename="kmos_wave_band" \
  --mainkey="ESO PRO CATG;string;WAVE_BAND" \
  --valid="none" \
  --input="ref/wave_band.txt"
```

### 9.3.2.2 REF\_LINES

#### **Introduction**

The KMOS spectral calibration recipe uses a two step approach to fit the calibration lamp images to the spectral line lists. In the first step it tries to fit a few selected well isolated (reference) lines. Using the position of these lines a first attempt to fit the position of the lines versus their wavelength is done. For the rest of the lines this estimate is used to detect them in a much smaller search range.

An IDL tool is available to create and maintain a table of reference lines for each band each table holding the lines for the three detectors.

#### **Prerequisites**

##### **Trace files:**

The IDL tool to generate the reference table needs some data input files which hold the trace over the detector for each slitlet of each IFU in lambda direction. These data files are created using the KMOS pipeline running the KMO\_WAVE\_CAL recipe. To trigger the creation of the data files the environment variable KMO\_WAVE\_CAL\_DATA\_PREFIX must be set. The string you choose will prefix all data files. The file name will be completed by the recipe with band ID, IFU and slitlet number. It is a good choice to start the KMO\_WAVE\_CAL\_DATA\_PREFIX with a “.” character to hide the trace data files in standard directory views.

The trace data files will be created in the current working directory.

When no reference table calibration file exists yet or it is too bad to process all slitlets it is necessary to use a different line estimation method in the KMO\_WAVE\_CAL recipe. Again an environment variable is used, KMO\_WAVE\_LINE\_ESTIMATE. Setting it to value of “0” shall result in a stable run of the KMO\_WAVE\_CAL recipe to generate the trace data files.

Don't forget to remove the environment variables after the trace data files are generated.

Examples:

bash shell:

```
$ export KMO_WAVE_CAL_DATA_PREFIX=.wave_cal_data
$ export KMO_WAVE_LINE_ESTIMATE=0
$ esorex kmo_wave_cal wavecal.sof
$ unset KMO_WAVE_CAL_DATA_PREFIX
$ unset KMO_WAVE_LINE_ESTIMATE
```

csh shell:



```
$ setenv      KMO_WAVE_CAL_DATA_PREFIX .wave_cal_data
$ setenv      KMO_WAVE_LINE_ESTIMATE 0
$ esorex      kmo_wave_cal wavecal.sof
$ unsetenv    KMO_WAVE_CAL_DATA_PREFIX
$ unsetenv    KMO_WAVE_LINE_ESTIMATE
```

## **Line lists:**

The IDL tool to generate the reference table needs the same line list files as used by the KMO\_WAVE\_CAL recipe of the pipeline. The combined AR and NE line list files are expected to have the file naming convention:

```
kmos_ar_ne_list_%s.fits
```

with %s being the lower case band name (h, k, hk, yj or iz).

## **Usage of the IDL tool**

The IDL tool to generate the reference table is distributed as compressed TAR file. Create a new empty directory, use it as working directory and untar the TAR file:

```
$ mkdir <dirName>
$ cd <dirName>
$ tar -cxvf <tarfile>
```

There are several ways to start the IDL tool

1. `$ idl main.pro`  
Use this way if your IDL installation allows the call of IDL batch file as argument. In this case you can edit *main.pro* to setup your default values for the arguments.
2. `$ idl -idl_startup main.pro`  
This way should work with any IDL installation. Again you can edit *main.pro* to setup your default values for the arguments.
3. `$ idl -vm=kmo_wave_calib.sav`  
This way should work with any IDL installation. All required arguments must be specified in the command line.
4. `$ idl -vm=installationDir/kmo_wave_calib.sav`  
This way should work with any IDL installation. This way your working directory can be different. All required arguments must be specified in the command line.

Following arguments are required by the IDL tool:

**cal\_dir** Specifies the directory where the line list calibration files will be found  
**data\_dir** Specifies the directory where the trace data file will be found.  
**prefix** Specifies the name prefix of the trace data files.  
**table** Specifies the name (including the directory path) of the reference lines table

Following arguments are optional:

**table** Specifies a FITS table with a set of reference line to start with. The default is an empty table.  
**pattern** Specifies file pattern for line list FITS tables. The pattern must contain at least one “%s” placeholder for the band name. The default is the pattern `kmos_ar_ne_list_%s.fits`

Default values for your installation can be fixed in the file *main.pro*.

Examples:

```
$ idl main.pro -args -table=../ref_lines.fits
```

The other argument values are defined in *main.pro*.

```
$ idl -idl_startup main.pro -args -table=../ref_lines.fits \
--prefix=test
```

The other argument values are defined in main.pro.

```
$ idl -vm=kmo_wave_calib.sav -args -table=../ref_lines.fits \
--prefix=.wave_cal_data \
-cal_dir=../calFiles \
-data_dir=../data
```

### 9.3.3 Rarely or almost never to renew

#### 9.3.3.1 ARC\_LIST, ATMOS\_MODEL, OH\_SPEC, SOLAR\_SPEC, SPEC\_TYPE\_LOOKUP

These are calibration files can be produced using the KMOS data reduction pipeline. The procedure is the same as described in section 9.3.2 for WAVE\_BAND.

```
$ calib_creator.sh SPEC_TYPE_LOOKUP ref/spec_type.txt
```

Additional parameters as filter or star temperature have to be provided for following calibration files:

```
$ calib_creator.sh ARC_LIST ref/ar_ne_list_iz.txt IZ
$ calib_creator.sh ATMOS_MODEL ref/atmos_yj.txt YJ
$ calib_creator.sh OH_SPEC ref/ohspec_H.fits H
$ calib_creator.sh SOLAR_SPEC ref/solar_h_2400.fits H 2400
```

(in the last example the temperature is just needed to create the correct output filename)

## 9.4 How to create XCAL, YCAL and LCAL

To create proper XCAL, YCAL and LCAL frames at the standard 6 rotator angles of 0°, 60°, 120°, 180°, 240° and 300° following templates have to be executed: KMOS\_spec\_cal\_dark, KMOS\_spec\_cal\_calunitflat and KMOS\_spec\_cal\_wave. Best practice is to run these templates in a single OB with their default values.

Furthermore the following static calibration frames of type ARC\_LIST, REF\_LINES and WAVE\_BAND are needed. They can be found in the CVS repository kmos-calib or in the pipeline deliverable.

```
kmos_ar_ne_list_h.fits
kmos_ar_ne_list_hk.fits
kmos_ar_ne_list_k.fits
kmos_ar_ne_list_iz.fits
kmos_ar_ne_list_yj.fits
kmos_wave_band.fits
kmos_wave_ref_table.fits
```

The following workflow creates all needed calibration frames for the RTD, for the pipeline workstation and for anyone using the KMOS DRS pipeline. The needed bash-script easySPARK\_calibration.sh can either be found in the CVS repository kmosp/tools/easySPARK or in the bin folder of the installed pipeline (e.g. using the distributed kmos-kit). easySPARK\_calibration.sh makes calls to

`easySPARK_dark.sh`, `easySPARK_flat` and `easySPARK_wave_cal.sh`. Therefore it is best if these scripts are available in the PATH environment variable.

- Update the environment variable PATH to the directory containing the above mentioned scripts:
  - `$ export PATH=<script_installation_path>:$PATH` (for bash)
  - or
  - `> setenv PATH <script_installation_path>:$PATH` (for tcsh)
- Set the environment variable KMOS\_CALIB to the directory containing the above mentioned static calibration frames:
  - `$ export KMOS_CALIB=<...>/kmos_calib` (for bash)
  - or
  - `> setenv KMOS_CALIB <...>/kmos_calib` (for tcsh)
- Change into directory where you want to create the calibration frames
- Execute the script. As argument a single file (path and name) is required. All associated exposures are retrieved via the OBS.START and TPL.START keyword, which is identical for all exposures generated in a single template. It is expected that the raw data frames are stored in directories with the same data format like on the pipeline workstation in Paranal (e.g. 2013-03-20), the script searches for frames automatically one day back and forth to be sure to find all frames belonging to the same OB:
  - `$ easySPARK_calibration.sh \`  
`/data-ut1/2013-03-20/KMOS_SPEC_CAL080_0068.fits`
- When the associated frames have been collected, they will be printed to the terminal window to be cross-checked again. Hit return to continue with Yes.
  - `kmo_dark`: at least 3 frames recommended
  - `kmo_flat`: at least 21 frames recommended for 6 rotator angles (3 off-frames, 6 times 3 on-frames)
  - `kmo_wave_cal`: at least 7 frames expected for 6 rotator angles (1 off-frame, 6 times 1 on-frame)
- You will be asked if a new directory should be created. Hit return to continue with Yes.
- You will be asked if all bands should be processed serially or in parallel. Default is serial, because with parallel processing at least 16 GB of RAM are recommended.
- First the dark recipe will be executed, then the flat recipes and then wave calibration.

## Hints:

- In case the `KMOS_spec_cal_dark` has been executed multiple times, the user can choose which frames to use.
- If more than 5 TPL.START IDs are present in the same OB for `KMOS_spec_cal_calunitflat` and `KMOS_spec_cal_wave`, the script exits with an error. In this case the frames have to be reduced individually.
- Take care that no old XCAL, YCAL or LCAL files are to be found in KMOS\_CALIB. For example if an easySPARK-script doesn't find such in the directory where it has been started, it will query as well KMOS\_CALIB. So it could happen that non matching XCAL, YCAL and LCAL are processed together.
- In order to obtain help on a specific script, just execute the script without an argument. If just the sof-files should be created without running ESOREX, simply provide `sof` as an additional parameter.



- `easySPARK_calibration.sh` can be decomposed into following sub scripts, e.g. if the templates accidentally haven't been run in the same OB:
  - `easySPARK_dark.sh`
  - `easySPARK_flat.sh`
  - `easySPARK_wave_cal.sh`

## 10 Updating the DRS version number

When updating the version number of the KMOS DRS it has always to be remembered that the project `kmclipm` is included in `kmosp`, but acts as well as standalone library in the RTD. Therefore some steps have to be completed for `kmosp` as well for `kmclipm`:

- Update all repositories (`cvcs update -Ad`)
  - `kmosp`
  - `kmospm`
  - `kmosc`
  - `kmosp-calib`
  - Eventually `pipetools`
- Perform unit tests: `run make check` in
  - `kmosp/kmos`
  - `kmosp/recipes`
  - `kmosp/kmclipm`
- Update the version number
  - `kmosp/configure.ac` (in `AC_INIT()`)
  - `kmosp/kmclipm/configure.ac` (in `AC_INIT()`)
  - `kmosc/gasgano/KMOS.prefs` (in `RECIPE_SET`)
- If this user manual gets a new version number it has to be changed as well in `kmosp/Makefile` under `VERSION=`
- Add short comment in
  - `kmosp/ChangeLog`
  - `kmosp/kmclipm/ChangeLog`
- Commit changes to repository (`cvcs commit`)
- Tag all repositories (`cvcs tag -c kmosp_v1_1_4_20130523`)
  - `kmosp`
  - `kmospm`
  - `kmosc`
  - `kmosp-calib`

## 11 Environment variables

Here all environment variables influencing the behaviour of the pipeline are described.

### 11.1 Variables influencing fitting of slitlet edges

**KF\_ALLPARS** (default if not set: 1)

Used in `kmo_flat` recipe.

When set to 1 all coefficients of the polynomial of an edge are to be corrected, also when just one of these coefficients is an outlier. When set to 0 only the outlier is to be corrected.

**KF\_CH** (default if not set: 1)

Used in `kmo_flat` recipe.

When set to 1 chebyshev polynomials are used to fit the fitted parameters. When set to 0 normal polynomials are used.

**KF\_SIDES** (default if not set: 2)

Used in `kmo_flat` recipe.

This variable can either be set to 1 or 2. When set to 2 the left and right edges are examined individually. When set to 1 all edges are examined as one group.

**KF\_FACTOR** (default if not set: 4)

Used in `kmo_flat` recipe.

This factor defines the threshold factor. All parameters deviating  $KF\_FACTOR \cdot \text{stddev}$  are to be corrected.

### 11.2 Variables influencing wavelength calibration

**KMO\_WAVE\_LINE\_ESTIMATE** (default if not set: 2)

Used in `kmo_wave_cal` recipe.

This environment variable controls which method is used to match the detected lines with the line lists (find line positions together with their wavelength). It is of integer type with following values:

- “0”: Fit the lines using the CPL routine `cpl_ppm_match_positions()`. This is a stable method although very likely the match is bad at least for a few IFUs.
- “1”: Fit the lines using the routine `irplib_wlxcorr_best_poly()` from the CRIRES pipeline which tries a kind of cross correlation between the detected lines and the line list. This method needs a first guess for the polynomial coefficients which will be read from a file `kmo_wave_guess_polynom_table.fits` stored in the local working directory. This file can be created by setting the `KMO_WAVE_LINE_ESTIMATE` environment variable to 16 and then execute the `kmo_wave_cal` recipe.
- “2”: Fit the lines by first match a set of reference lines, then fit a third order polynomial to search for the positions of the other lines. This method needs a set of reference lines which is stored in a special calibration file. See section 9.3.2.1 how to create/edit this calibration file.
- “16”: By setting the fifth bit of `KMO_WAVE_LINE_ESTIMATE` (adding the value 16) the first guess table for the polynomial coefficients will be updated after the line positions are detected using the CPL routine `cpl_ppm_match_positions()`.

- “x”: By setting the sixth bit of KMO\_WAVE\_LINE\_ESTIMATE (adding the value 32) the first guess table for the polynomial coefficients will be updated after all fit coefficients are fitted again across the detector. As this fitting across the detector is currently switched off this will not work.

The default value is “2”. The method “0” is used to create the reference line table. Method “1” is not recommended.

## **KMO\_WAVE\_CAL\_DATA\_PREFIX**

Used in kmo\_wave\_cal recipe.

If this environment variable is set, special FITS files will be created to support the editing of the reference lines calibration file. The value of this environment variable will be used as prefix for those files. As there will be generated more than 2000 files this prefix usually starts with a “.” character to hide them from file listings. The final file name will be:

{PREFIX}\_{BAND}\_ifu\_{IFUNUMBER}\_slitlet\_{SLITLETNUMBER}.fits

## **LC\_ALLPARS**

## **LC\_CH**

## **LC\_SIDES**

## **LC\_FACTOR**

These variables control the fitting of the polynomial coefficients found for the spectral calibration over the spatial detector axis. **As this functionality is currently turned off all LC\_\* variables are ignored.**

## **11.3 Variables influencing reconstruction**

### **KMO\_BAND\_METHOD** (default if not set: 0)

Used in all recipes using reconstruction.

- 0: Using wavelength limits defined in WAVE\_BAND frame
- 1: Using minimum and maximum of the LCAL frame as wavelength limits.

### **KMO\_WAVE\_RECONSTRUCT\_METHOD** (default if not set: “lwNN”)

Used in kmo\_wave\_cal recipe.

Specifies the reconstruction method for creating the reconstructed detector image. Following values are allowed:

- NN nearest neighbor
- lwNN linear weighted nearest neighbor (default)
- swNN square weighted nearest neighbor
- MS Modified Shephards method
- CS cubic spline
- 

### **KMCLIPM\_PRIV\_RECONSTRUCT\_LUT\_MODE** (default if not set: FILE)

Influences the handling of the LUT. There are four modes. They are explained in detail in section 6.4.

- NONE
- MEMORY
- FILE
- BOTH



## 11.4 Variables influencing RTD reconstruction

### **RTD\_CHECK\_FOR\_SATURATION**

If defined the detector image given to reconstruction will be checked for saturated pixels. Saturated pixels will be added to the bad pixel mask.

### **KMO\_RECONSTRUCT\_BADPIXEL\_VALUE**

If this variable is not set bad pixel will be ignored. If it is set all bad pixels will be set to this value before reconstruction.

### **RTD\_RECONSTRUCT\_METHOD** (default if not set: NN)

If this variable is not set RTD reconstruction will use simple nearest neighbor reconstruction. It can be set to:

- NN nearest neighbor (default)
- LWNN linear weighted nearest neighbor
- SWNN square weighted nearest neighbor
- MS Modified Shephards method
- CS cubic spline

## 11.5 Variables influencing the debugging

### **KMO\_TEST\_VERBOSE** (default if not set: no error messages shown)

Switches on and off error-messages for the unit tests globally. It is only seen if a test fails or not. Either set this variable or look at the generated log files for debugging the unit tests.

### **KMCLIPM\_DEBUG** (default if not set: no fit-parameters displayed or stored)

Prints gauss-fit parameters to the console and saves them as well in a file at KMCLIPM\_DEBUG/tmp/kmclipm\_fitpar.txt

This variable is somehow obsolete, since now all fit parameters are returned from kmclipm\_rtd\_image() anyway. This way the ICS software has full control over the decision how to handle a reconstructed and collapsed cube.





## Appendix A Data Processing Tables

Recipe	Template	Classification Keywords	Calibration Database	Data Products	QC1 Parameters
kmo_dark	KMOS_spec_cal_dark	DO cat = DARK DPR.TYPE = DARK DPR.CATG = CALIB DPR.TECH = IMAGE	-	Master Dark frame Preliminary Bad pixel mask Dark Current Read noise	Mean Bias Mean Read Noise Number of bad pixels  Mean Dark Current
	Processing: iterative mean of frames; identify bad pixels				
	FITS keywords: DIT, MINDIT				
kmo_flat	KMOS_spec_cal_calunit	DO cat = FLAT_ON DPR.TYPE = FLAT, LAMP DPR.CATG = CALIB DPR.TECH = SPECTRUM  DO cat = FLAT_OFF DPR.TYPE = FLAT, OFF DPR.CATG = CALIB DPR.TECH = IMAGE	Preliminary Bad pixel mask (from kmo_dark)	Master Flat Spectral Curvature Calibration frames Final Bad pixel mask	Mean shift of slitlet edges RMS shift of slitlet edges Lamp efficiency Number of saturated pixels in flatfield Mean S/N in flatfield Mean change in 0 <sup>th</sup> order coefficients RMS change in 0 <sup>th</sup> order coefficients Mean change in 1 <sup>st</sup> order Y coefficients RMS change in 1 <sup>st</sup> order Y coefficients
	Processing: subtract mean of on & off frames; identify pixels that are bad or not illuminated; fit functions to spectral traces; generate frame where the pixel value corresponds to the spatial position (in arcsec) of that pixel				
	FITS keywords: INS.FILT1.NAME, INS.LAMP3.ST, INS.LAMP4.ST				
kmo_illumination	KMOS_spec_cal_skyflat	DO cat = FLAT_SKY DPR.TYPE = FLAT, SKY DPR.CATG = CALIB DPR.TECH = IFU	Final Bad pixel mask Master Flat frame Spectral Curvature Calibration frame Wavelength Calibration frame	Illumination Correction frame	Spatial uniformity of flatfield Max deviation of an IFU identification of that IFU Max non-uniformity within an IFU identification of that IFU
	Processing: average frames; reconstruct cubes; collapse to images; normalise				
	FITS keywords: INS.FILT1.NAME				
kmo_wave_cal	KMOS_spec_cal_wave	DO cat = ARC_ON DPR.TYPE = WAVE, LAMP DPR.CATG = CALIB DPR.TECH = SPECTRUM  DO cat = ARC_OFF DPR.TYPE = WAVE, OFF DPR.CATG = CALIB DPR.TECH = IMAGE	Final Bad pixel mask Arc line wavelength table	Wavelength Calibration frame	Arc lamp efficiency Number of saturated pixels in arc frame Spectral Resolution Mean change in 0 <sup>th</sup> order coefficients RMS change in 0 <sup>th</sup> order coefficients Mean change in 1 <sup>st</sup> order Y coefficients RMS change in 1 <sup>st</sup> order Y coefficients
	Processing: subtract on & off frames; fit functions to arc line traces; generate frame where the pixel value corresponds to the wavelength (in microns) of that pixel				
	FITS keywords: INS.FILT1.NAME, INS.LAMP1.ST, INS.LAMP2.ST				



# Data Reduction Library Design & Manual

Doc No: VLT-MAN-KMO-146611-007  
 Version: 2.7  
 Author: A. Agudo Berbel, E. Wiezorrek,  
 R. Davies, N. Förster Schreiber,  
 Date: 07.08.2013

Recipe	Template	Classification Keywords	Calibration Database	Data Products	QC1 Parameters
kmo_std_star	KMOS_spec_cal_std	DO cat = STD DPR.TYPE = OBJECT, SKY, STD, FLUX DPR.CATG = CALIB DPR.TECH = IFU	Final Bad pixel mask Master flat frame Wavelength Calibration frame Spectral Curvature Calibration frame Illumination Correction Frame Model Atmospheric Transmission Spectrum Solar Spectrum Spectral Type Lookup Table	Telluric Correction Spectrum Images of the stars (for seeing measurement) Flux Calibration (if star magnitude given)	Mean Zeropoint Mean & Std Dev Throughput Mean Spatial Resolution Straightness of corrected trace
Processing: subtract object & sky frames; reconstruct cube; extract spectrum; correct stellar imprint; calculate flux calibration					
FITS keywords: INS.FILTi.NAME, OCS.ARMi.TYPE					
kmo_sci_red	KMOS_spec_obs_nodtosky KMOS_spec_obs_stare KMOS_spec_obs_mapping	DO cat = SCIENCE DPR.TYPE = OBJECT, SKY DPR.CATG = SCIENCE DPR.TECH = IFU	Final Bad pixel mask Master flat frame Wavelength Calibration frame Spectral Curvature Calibration frame Illumination Correction Frame Telluric Correction Spectrum	Reduced Science Cube	none
Processing: subtract object & sky frames; reconstruct cube; divide out telluric imprint; calibrate flux					
FITS keywords: INS.FILTi.NAME, OCS.ARMi.ALPHA, OCS.ARMi.DELTA, OCS.ARMi.TYPE, OCS.ARMi.NAME					
kmo_rtd_image	triggered by CLIP	N/A	Final Bad pixel mask Master Dark frame Wavelength Calibration frame Spectral Curvature Calibration frame OH line wavelength table	Reconstructed images (to display on RTD)	none
Processing: subtract object & sky/dark frames; reconstruct cube; excise regions near OH lines; collapse spectral axis to create image					
FITS keywords: N/A					



## Appendix B The KMOS data interface dictionary

The column dependency indicates that the QC parameter will be different for (i.e. depends on) each detector ('D'), each IFU ('I') and/or each bandpass ('B') respectively.

Table of (possibly) generated keywords by the calibration recipes of the DRS:

<i>name</i>	<i>header</i>	<i>unit</i>	<i>data type</i>	<i>dependency</i>	<i>description</i>
HIERARCH ESO PRO ARMx NOTUSED	primary	-	string	I	This keyword is only present when a recipe wasn't able to process a specific IFU ([ IFU set inactive by <recipe_name>)
HIERARCH ESO PRO BOUND IFUi_L	primary	pix	int	I	This keyword contains the left bound of the area on the detector containing IFU i. This keyword is generated in <code>kmo_flat</code> and stored in the xcal-frame for every active IFU. This information is reused when reconstructing.
HIERARCH ESO PRO BOUND IFUi_R	primary	pix	int	I	This keyword contains the right bound of the area on the detector containing IFU i. See also comment above.
HIERARCH ESO PRO ROT NAANGLE	extension	deg	double	D	This keyword is set by <code>kmo_flat</code> and <code>kmo_wave_cal</code> to indicate which extension belongs to which rotator angle.

Table of generated QC keywords by the calibration recipes (see section 5.1 for more detailed information):

<i>name</i>	<i>header</i>	<i>unit</i>	<i>data type</i>	<i>dependency</i>	<i>description</i>
<b>kmo_dark</b>					
HIERARCH ESO QC DARK	extension	adu	double	D	mean value of Master Dark
HIERARCH ESO QC DARK MEDIAN	extension	adu	double	D	median value of Master Dark
HIERARCH ESO QC RON	extension	adu	double	D	mean value of noise of Master Dark
HIERARCH ESO QC RON MEDIAN	extension	adu	double	D	median value of noise of Master Dark
HIERARCH ESO QC DARKCUR	extension	e <sup>-</sup> /s	double	D	iterative mean dark current in Master Dark divided by gain
HIERARCH ESO QC BADPIX NCOUNTS	extension	-	int	D	number of bad pixels in Master Dark
<b>kmo_flat</b>					



# Data Reduction Library Design & Manual

Doc No: VLT-MAN-KMO-146611-007  
 Version: 2.7  
 Author: A. Agudo Berbel, E. Wiezorrek,  
 R. Davies, N. Förster Schreiber,  
 Date: 07.08.2013

HIERARCH ESO QC FLAT EFF	extension	e <sup>-</sup> /s	double	DB	relative brightness of flatfield lamp
HIERARCH ESO QC FLAT SAT NCOUNTS	extension	-	int	DB	number of saturated pixels in Master Flat
HIERARCH ESO QC FLAT SN	extension	-	double	DB	signal-to-noise in Master Flat
HIERARCH ESO QC GAP MEAN	extension	pix	double	DB	mean gap width between slitlets
HIERARCH ESO QC GAP SDV	extension	pix	double	DB	standard deviation of gap width between slitlets
HIERARCH ESO QC GAP MAXDEV	extension	pix	double	DB	maximum deviation of gap width between slitlets
HIERARCH ESO QC SLIT MEAN	extension	pix	double	DB	mean slitlet width
HIERARCH ESO QC SLIT SDV	extension	pix	double	DB	standard deviation of slitlet width
HIERARCH ESO QC SLIT MAXDEV	extension	pix	double	DB	maximum deviation of slitlet width
HIERARCH ESO QC BADPIX NCOUNTS	extension	-	int	D	number of bad pixels in Master Flat
<b>kmo_wave_cal</b>					
HIERARCH ESO QC ARC AR EFF	extension	e <sup>-</sup> /s	double	B	relative brightness of argon arclamp
HIERARCH ESO QC ARC NE EFF	extension	e <sup>-</sup> /s	double	B	relative brightness of neon arclamp
HIERARCH ESO QC ARC SAT NCOUNTS	extension	-	int	B	number of saturated pixels in arc frame
HIERARCH ESO QC ARC AR POS MEAN	extension	km/s	double	DB	mean of all Argon reference line position offsets (measured vs. expected)
HIERARCH ESO QC ARC AR POS MAXDIFF	extension	km/s	double	DB	maximum offset of measured vs. expected Argon reference line position
HIERARCH ESO QC ARC AR POS MAXDIFF ID	extension	-	int	DB	identification of the IFU which has the maximum offset
HIERARCH ESO QC ARC AR POS STDEV	extension	km/s	double	DB	mean standard deviation of position offset for Argon reference line
HIERARCH ESO QC ARC AR POS 95%ILE	extension	km/s	double	DB	mean 95%ile of position offset for Argon reference line
HIERARCH ESO QC ARC AR FWHM MEAN	extension	km/s	double	DB	mean of FWHM for Argon reference line
HIERARCH ESO QC ARC AR FWHM STDEV	extension	km/s	double	DB	mean stdev of FWHM for Argon reference line
HIERARCH ESO QC ARC AR FWHM 95%ILE	extension	km/s	double	DB	mean 95%ile of FWHM for Argon reference line
HIERARCH ESO QC ARC NE POS MEAN	extension	km/s	double	DB	mean of all Neon reference line position offsets (measured vs. expected)
HIERARCH ESO QC ARC NE POS MAXDIFF	extension	km/s	double	DB	maximum offset of measured vs. expected Neon reference line position
HIERARCH ESO QC ARC NE POS MAXDIFF ID	extension	-	int	DB	identification of the IFU which has the maximum offset
HIERARCH ESO QC ARC NE POS STDEV	extension	km/s	double	DB	mean standard deviation of position offset for Neon reference line
HIERARCH ESO QC ARC NE POS 95%ILE	extension	km/s	double	DB	mean 95%ile of position offset for Neon reference line
HIERARCH ESO QC ARC NE FWHM MEAN	extension	km/s	double	DB	mean of FWHM for Neon reference line
HIERARCH ESO QC ARC NE FWHM STDEV	extension	km/s	double	DB	mean stdev of FWHM for Neon reference line
HIERARCH ESO QC ARC NE FWHM 95%ILE	extension	km/s	double	DB	mean 95%ile of FWHM for Neon reference line
<b>kmo_illumination</b>					
HIERARCH ESO QC SPAT UNIF	primary	adu	double	B	uniformity across all illumination corrections
HIERARCH ESO QC SPAT MAX DEV ID	primary	-	int	B	identification of the IFU whose illumination correction deviates most from unity
HIERARCH ESO QC SPAT MAX DEV	primary	adu	double	B	value of this deviation
HIERARCH ESO QC SPAT MAX NONUNIF ID	primary	-	int	B	identification of the IFU which has the most non-uniform illumination correction



HIERARCH ESO QC SPAT MAX NONUNIF	primary	adu	double	B	standard deviation of the illumination correction for this IFU
<b>kmo_std_star</b>					
HIERARCH ESO QC ZPOINT	extension	mag	double	DB	zeropoint (magnitude) [stored in extension headers of telluric]
HIERARCH ESO QC THRUPUT	extension	-	double	DB	throughput of KMOS (i.e. ratio of number of photons detected to number expected from the standard star) [stored in extension headers of telluric]
HIERARCH ESO QC THRUPUT MEAN	primary	-	double	B	mean of throughput of all detectors [stored in primary header of telluric]
HIERARCH ESO QC THRUPUT SDV	primary	-	double	B	standard deviation of throughput of all detectors [stored in primary header of telluric]
HIERARCH ESO QC SPAT RES	extension	-	double	DB	spatial resolution (FWHM) [stored in extension headers of std_image]
HIERARCH ESO QC STD TRACE	extension	pix	double	DB	a measure of how straight the corrected trace of a star is (i.e. how well the spectral curvature has been corrected) [stored in extension headers of std_image]
HIERARCH ESO QC NR STD STARS	primary	-	int	I	the number of standard stars in a standard star exposure [stored in primary headers of all output frames]

Table of generated keywords by `kmo_fit_profile` (see section 7.3.5 for more detailed information):

<i>name</i>	<i>header</i>	<i>unit</i>	<i>data type</i>	<i>dependency</i>	<i>description</i>
HIERARCH ESO PRO FIT MAX PIX	extension	pix	double	I	Position of the maximum (1D fit)
HIERARCH ESO PRO FIT MAX PIX X	extension	pix	double	I	Position of the maximum in x (2D fit)
HIERARCH ESO PRO FIT MAX PIX Y	extension	pix	double	I	Position of the maximum in y (2D fit)
HIERARCH ESO PRO FIT CENTROID	extension	pix	double	I	Position of the centroid (1D fit)
HIERARCH ESO PRO FIT CENTROID X	extension	pix	double	I	Position of the centroid in x (2D fit)
HIERARCH ESO PRO FIT CENTROID Y	extension	pix	double	I	Position of the centroid in y (2D fit)
HIERARCH ESO PRO FIT RADIUS X	extension	pix	double	I	Radius in x of fitted 2D profile
HIERARCH ESO PRO FIT RADIUS Y	extension	pix	double	I	Radius in y of fitted 2D profile
HIERARCH ESO PRO FIT OFFSET	extension	adu	double	I	Background/offset
HIERARCH ESO PRO FIT INTENS	extension	adu	double	I	Intensity of the function
HIERARCH ESO PRO FIT SIGMA	extension	pix	double	I	Sigma of the gauss function
HIERARCH ESO PRO FIT ALPHA	extension	-	double	I	Alpha of fitted Moffat function
HIERARCH ESO PRO FIT BETA	extension	-	double	I	Beta of fitted Moffat function
HIERARCH ESO PRO FIT SCALE	extension	adu	double	I	Scale of fitted Lorentz function
HIERARCH ESO PRO FIT ROT	extension	deg	double	I	Rotation angle (clockwise)
HIERARCH ESO PRO FIT ERR CENTROID	extension	pix	double	I	Error in position of the centroid (1D fit)



HIERARCH ESO PRO FIT ERR CENTROID X	extension	pix	double	I	Error in position of the centroid in x (2D fit)
HIERARCH ESO PRO FIT ERR CENTROID Y	extension	pix	double	I	Error in position of the centroid in y (2D fit)
HIERARCH ESO PRO FIT ERR RADIUS X	extension	pix	double	I	Error in radius in x of fitted 2D profile
HIERARCH ESO PRO FIT ERR RADIUS Y	extension	pix	double	I	Error in radius in y of fitted 2D profile
HIERARCH ESO PRO FIT ERR OFFSET	extension	adu	double	I	Error in background/offset
HIERARCH ESO PRO FIT ERR ROT	extension	deg	double	I	Error in rotation angle (clockwise)
HIERARCH ESO PRO FIT ERR INTENS	extension	adu	double	I	Error in intensity of the function
HIERARCH ESO PRO FIT ERR SIGMA	extension	pix	double	I	Error in sigma of the gauss function
HIERARCH ESO PRO FIT ERR ALPHA	extension	-	double	I	Error in alpha of fitted Moffat function
HIERARCH ESO PRO FIT ERR BETA	extension	-	double	I	Error in beta of fitted Moffat function
HIERARCH ESO PRO FIT ERR SCALE	extension	adu	double	I	Error in scale of fitted Lorentz function
HIERARCH ESO PRO FIT RED CHISQ	extension	-	double	I	Reduced chi square error of the fit

\_\_\_oooOOOooo\_\_\_