



# EUROPEAN SOUTHERN OBSERVATORY

Organisation Européenne pour des Recherches Astronomiques dans l'Hémisphère Austral

Europäische Organisation für astronomische Forschung in der südlichen Hemisphäre

## VERY LARGE TELESCOPE

### NACO Pipeline User Manual

VLT-MAN-ESO-19500-3993

Issue 1.1

Date 15th May 2012

Prepared: L.K.Lundin 15th May 2012  
Name Date Signature

Approved: P.Ballester  
Name Date Signature

Released: M. Peron  
Name Date Signature

No content on this page

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	3 of 56

#### Change record

Issue/Rev.	Date	Section/Parag. affected	Reason/Initiation/Documents/Remarks
1.0	2007-06-29	All	For NACO pipeline 3.6.2
1.1	15th May 2012	All	For NACO pipeline 4.3.1

No content on this page

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	5 of 56

## Contents

<b>1</b>	<b>Introduction</b>	<b>9</b>
1.1	Purpose . . . . .	9
1.2	Acknowledgements . . . . .	9
1.3	Scope . . . . .	9
1.4	Reference Documents and Applicable Documents . . . . .	9
<b>2</b>	<b>Overview</b>	<b>11</b>
<b>3</b>	<b>NACO Instrument Description</b>	<b>12</b>
<b>4</b>	<b>Quick start</b>	<b>13</b>
4.1	NACO pipeline recipes . . . . .	13
4.2	An introduction to Gasgano and EsoRex . . . . .	13
4.2.1	Using Gasgano . . . . .	14
4.2.2	Using EsoRex . . . . .	15
<b>5</b>	<b>Known Problems</b>	<b>21</b>
5.1	50 Hz noise . . . . .	21
5.2	Vertical Stripes . . . . .	21
<b>6</b>	<b>Instrument Data Description</b>	<b>22</b>
6.1	General Data Layout . . . . .	22
6.2	Imaging frames . . . . .	22
<b>7</b>	<b>Static Calibration Data</b>	<b>25</b>
7.1	Standard Star Catalogs . . . . .	25
<b>8</b>	<b>Data Reduction</b>	<b>26</b>
8.1	Data reduction overview . . . . .	26
8.1.1	Dark variations (SW) . . . . .	26
8.1.2	Odd-even column effect (SW) . . . . .	26
8.1.3	50Hz pickup (SW) . . . . .	26

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	6 of 56

8.1.4	Detector linearity (SW/LW)	26
8.1.5	Electronic ghosts	27
8.2	Required input data	27
8.3	Reduction Cascade	27
<b>9</b>	<b>Pipeline Recipe Interfaces</b>	<b>29</b>
9.1	naco_img_jitter	29
9.1.1	Input	29
9.1.2	Output	29
9.1.3	Quality control	29
9.1.4	Parameters	29
9.2	naco_img_dark	30
9.2.1	Input	30
9.2.2	Output	30
9.2.3	Quality control	30
9.2.4	Parameters	31
9.3	naco_img_twflat	31
9.3.1	Input	31
9.3.2	Output	31
9.3.3	Quality control	31
9.3.4	Parameters	32
9.4	naco_img_lampflat	32
9.4.1	Input	32
9.4.2	Output	32
9.4.3	Quality control	32
9.4.4	Parameters	33
9.5	naco_img_strehl	33
9.5.1	Input	33
9.5.2	Output	33
9.5.3	Quality control	33
9.5.4	Parameters	33

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	7 of 56

9.6	naco_img_zpoint . . . . .	34
9.6.1	Input . . . . .	34
9.6.2	Output . . . . .	34
9.6.3	Quality control . . . . .	34
9.6.4	Parameters . . . . .	35
9.7	naco_img_checkfocus . . . . .	35
9.7.1	Input . . . . .	35
9.7.2	Output . . . . .	35
9.7.3	Quality control . . . . .	36
9.7.4	Parameters . . . . .	36
9.8	naco_img_slitpos . . . . .	36
9.8.1	Input . . . . .	36
9.8.2	Output . . . . .	36
9.8.3	Quality control . . . . .	36
9.8.4	Parameters . . . . .	37
9.9	naco_img_detlin . . . . .	37
9.9.1	Input . . . . .	37
9.9.2	Output . . . . .	38
9.9.3	Quality control . . . . .	38
9.9.4	Parameters . . . . .	38
<b>10</b>	<b>Algorithms</b>	<b>39</b>
10.1	Recipe Algorithms . . . . .	39
10.1.1	naco_img_jitter . . . . .	39
10.1.2	naco_img_dark . . . . .	40
10.1.3	naco_img_twflat . . . . .	41
10.1.4	naco_img_lampflat . . . . .	41
10.1.5	naco_img_strehl . . . . .	42
10.1.6	naco_img_zpoint . . . . .	43
10.1.7	naco_img_checkfocus . . . . .	43
10.1.8	naco_img_slitpos . . . . .	44

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	8 of 56

10.1.9	naco_img_detlin . . . . .	44
<b>A</b>	<b>Installation</b>	<b>46</b>
A.1	Supported platforms . . . . .	46
A.2	Building the NACO pipeline . . . . .	46
A.2.1	Requirements . . . . .	47
A.2.2	Compiling and installing the NACO pipeline . . . . .	47
<b>B</b>	<b>QC Parameters</b>	<b>49</b>



<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	9 of 56

# 1 Introduction

## 1.1 Purpose

The NACO pipeline is a subsystem of the *VLT Data Flow System* (DFS). It is used in two operational environments, for the *ESO Data Flow Operations* (DFO), and for the *Paranal Science Operations* (PSO), in the quick-look assessment of data, in the generation of master calibration data, in the reduction of scientific exposures, and in the data quality control. Additionally, the NACO pipeline recipes are made public to the user community, to allow a more personalised processing of the data from the instrument. The purpose of this document is to describe a typical NACO data reduction sequence with the NACO pipeline.

This manual is a complete description of the data reduction recipes offered by the NACO pipeline, reflecting the status of the NACO pipeline as of 15th May 2012 (version 4.3.1).

## 1.2 Acknowledgements

Since the beginning of the NACO operations in 2002, several people have been involved in the NACO pipeline project. Nicolas Devillard developed the first version of the pipeline and Yves Jung brought substantial contributions to that version. Yves Jung later wrote a new CPL-based version of the pipeline, and in late 2005 the maintenance of this pipeline was passed on to Lars Lundin.

From Paranal, the instrument scientists, first Chris Lidman and then Nancy Ageorges have contributed with valuable feed-back and ideas for improvement. In the operations team, Wolfgang Hummel at the beginning, and now Danuta Dobrzycka have acted as in depth testers, ensuring proper results from the different recipes.

## 1.3 Scope

This document describes the NACO pipeline used at ESO-Garching and ESO-Paranal for the purpose of data assessment and data quality control.

Updated versions of the present document may be found on [15]. For general information about the current instrument pipelines status we remind the user of [6]. Quality control information are at [5].

Additional information on QFITS, the Common Pipeline Library (CPL) and ESOREX can be found respectively at [10], [13]. The Gasgano tool is described in [14]. A description of the instrument is in [7]. The NACO instrument user manual is in [8] while results of Science Verifications (SV) are at [2].

## 1.4 Reference Documents and Applicable Documents

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	10 of 56

- [1] ESO. *NACO Calibration Plan*. VLT-PLA-ESO-14200-2664.
- [2] ESO, <http://www.eso.org/science/vltsv/nacosv/>. *NACO Science Verification home page*. 9
- [3] ESO. *VLT Data Flow System Specifications for Pipeline and Quality Control*. VLT-SPE-ESO-19600-1233.
- [4] ESO/DMO. *ESO DICB – Data Interface Control Document*. GEN-SPE-ESO-19400-0794 (3.0). 22, 23, 24
- [5] ESO/DMO/DFO, <http://www.eso.org/observing/dfo/quality/>. *ESO-Data Flow Operation home page*. 9, 29
- [6] ESO/DMO/DFO, <http://www.eso.org/observing/dfo/quality/>. *NACO Pipeline Current Status*. 9
- [7] ESO/INS, <http://www.eso.org/instruments/naco/>. *NACO instrument home page*. 9, 12
- [8] ESO/INS, <http://www.eso.org/instruments/naco/doc/>. *NACO instrument home page*. 9, 12
- [9] ESO/SDD/DFS, <http://www.eso.org/observing/cpl/download.html>. *Common Pipeline Library User Manual*. VLT-MAN-ESO-19500-2720.
- [10] ESO/SDD/DFS, <http://www.eso.org/cpl/>. *CPL home page*. 9, 39, 40, 41, 42
- [11] ESO/SDD/DFS. *Deliverables Specification*. VLT-SPE-ESO-19000-1618 (2.0).
- [12] ESO/SDD/DFS. *DFS Pipeline & Quality Control – User Manual*. VLT-MAN-ESO-19500-1619.
- [13] ESO/SDD/DFS, <http://www.eso.org/cpl/esorex.html>. *ESOREX home page*. 9, 16, 18
- [14] ESO/SDD/DFS, <http://www.eso.org/gasgano/>. *Gasgano User's Manual*. VLT-PRO-ESO-19000-1932. 9, 11, 15, 22
- [15] ESO/SDD/DFS, <http://www.eso.org/pipelines>. *NACO Pipeline Web Page*. 9

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	11 of 56

## 2 Overview

In collaboration with instrument consortia, the Data Flow Systems Department (DFS) of the Data Management and Operation Division is implementing data reduction pipelines for the most commonly used VLT/VLTI instrument modes. These data reduction pipelines have the following three main purposes:

**Data quality control:** pipelines are used to produce the quantitative information necessary to monitor instrument performance.

**Master calibration product creation:** pipelines are used to produce master calibration products (e.g. , combined dark frames, super-flats, wavelength dispersion solutions).

**Science product creation:** using pipeline-generated master calibration products, science products are produced for the supported instrument modes (e.g. , combined NACO jitter stacks; bias-corrected, flat-fielded FORS images, wavelength-calibrated UVES spectra). The accuracy of the science products is limited by the quality of the available master calibration products and by the algorithmic implementation of the pipelines themselves. In particular, adopted automatic reduction strategies may not be suitable or optimal for all scientific goals.

Instrument pipelines consist of a set of data processing modules that can be called from the command line, from the automatic data management tools available on Paranal or from Gasgano.

ESO offers two front-end applications for launching pipeline recipes, *Gasgano* [14] and *EsoRex*, both included in the pipeline distribution (see Appendix A, page 46). These applications can also be downloaded separately from <http://www.eso.org/gasgano> and <http://www.eso.org/cpl/esorex.html>. An illustrated introduction to Gasgano is provided in the "Quick Start" Section of this manual (see page 13).

The NACO instrument and the different types of NACO raw frames and auxiliary data are described in Sections 3, 6.1, and 7.

A brief introduction to the usage of the available reduction recipes using Gasgano or EsoRex is presented in Section 4.

In section 5 we advice the user about known data reduction problems.

An overview of the data reduction, what are the input data, and the recipes involved in the calibration cascade is provided in Section 8.

More details on what are inputs, products, quality control measured quantities, and controlling parameters of each recipe is given in Section 9.

More detailed descriptions of the data reduction algorithms used by the individual pipeline recipes can be found in Section 10.

In Appendix A the installation of the NACO pipeline recipes is described.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	12 of 56

### 3 NACO Instrument Description

NACO (NAOS-CONICA) is installed at the Nasmyth B focus of UT4. It provides adaptive optics assisted imaging, imaging polarimetry, coronagraphy and spectroscopy, in the 1-5 microns range. It also includes a Fabry-Perot unit in the 2-2.5 microns range.

The adaptive optics system, NAOS, is equipped with both visible and infrared wavefront sensors. It contains 5 dichroics which split the light from the telescope between CONICA and one of the NAOS wavefront sensors.

CONICA is the infrared camera and spectrometer attached to NAOS and is equipped with an Aladdin 3  $1026 \times 1024$  pixel InSb array detector.

It contains several wheels carrying masks/slits (including focal plane coronagraphic masks), filters, polarizing elements, grisms and several cameras allowing diffraction limited sampling across the full wavelength range. CONICA is not intended to be operated without NAOS.

Figure 3.0.1 shows a picture of the instrument mounted on the fourth unit telescope (Yepun) on the VLT.



Figure 3.0.1: *NACO at UT4.*

See [7], [8] for a more complete description of NACO.

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	13 of 56

## 4 Quick start

This section describes the most immediate usage of the NACO pipeline recipes.

### 4.1 NACO pipeline recipes

The current NACO pipeline supports imaging mode only. It does this with a set of 9 stand-alone recipes involved in the data reduction cascade.

The 9 recipes in are:

**naco\_img\_jitter:** Main reconstruction routine, including dark correction, flatfield calibration, bad pixels cleaning, and images correlation and recombination.

**naco\_img\_dark:** Creates a master dark frame to calibrate the dark current.

**naco\_img\_twflat:** Uses a set of twilight images to create a master flat field frame and a bad pixels map.

**naco\_img\_lampflat:** Uses a set of lamp images to create a master flat field frame and a bad pixels map.

**naco\_img\_strehl:** Strehl computation with error estimate using standard star observations.

**naco\_img\_zpoint:** Zero point measurements using standard star observations.

**naco\_img\_checkfocus:** Checks the focus.

**naco\_img\_slitpos:** Makes a precise slit analysis to help the slit positioning on the instrument.

**naco\_img\_detlin:** Measures the linearity of the detector.

### 4.2 An introduction to Gasgano and EsoRex

Before being able to call pipeline recipes on a set of data, the data must be opportunely classified, and associated with the appropriate calibrations. The *Data Classification* consists of tasks such as: "What kind of data am I?", e.g. , DARK, "to which group do I belong?", e.g., to a particular Observation Block or template. *Data Association* is the process of selecting appropriate calibration data for the reduction of a set of raw science frames. Typically, a set of frames can be associated if they share a number of properties, such as instrument and detector configuration. As all the required information is stored in the FITS headers, data association is based on a set of keywords (called "association keywords") and is specific to each type of calibration.

The process of data classification and association is known as data organisation. The *DO Category* is the label assigned to a data type as a result of data classification.

An instrument pipeline consists of a set of data processing modules that can be called from different host applications, either from the command line with *Esorex*, from the automatic data management tools available at Paranal, or from the graphical *Gasgano* tool.

*Gasgano* is a data management tool that simplifies the data organisation process, offering automatic data classification and making the data association easier (*even if automatic association of frames is not yet provided*).

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	14 of 56

*Gasgano* determines the classification of a file by applying an instrument specific rule, while users must provide this information to the recipes when they are executed manually using *Esorex* from the command line. In addition, *Gasgano* allows the user to execute directly the pipeline recipes on a set of selected files.

#### 4.2.1 Using Gasgano

To get familiar with the NACO pipeline recipes and their usage, it is advisable to begin with *Gasgano*, because it provides a complete graphic interface for data browsing, classification and association, and offers several other utilities such as easy access to recipes documentation and preferred data display tools.

*Gasgano* can be started from the Command Line Interface in the following way:

```
gasgano &
```

Figure 4.2.1 shows the *Gasgano* main window.



Figure 4.2.1: The *Gasgano* main window.

With the pull-down-menu *File->Add/Remove Files* directories containing NACO data can be added, as shown in figure 4.2.2 on the next page. Figure 4.2.3 on page 16 shows the example data set distributed with the public release of the NACO pipeline with their classification as CAL\_DARK.

The data are hierarchically organised as preferred by the user. After each file name are shown the classification, the template id, the original filename, the template exposure number and the number of exposures in the template.

More information about a single frame can be obtained by clicking on its name: the corresponding FITS file header will be displayed on the bottom panel, where specific keywords can be opportunely filtered and searched. Images and tables may be easily displayed using the viewers specified in the appropriate *Preferences* fields.

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	15 of 56



Figure 4.2.2: The Gasgano main window with the file loader window on top showing two NACO files marked for loading.

Frames can be selected from the main window with a <CTRL>-left-click for processing by the appropriate recipe: on Figure 4.2.4 on page 17, a set of dark calibration FITS-files have been selected and the pull-down-menu with the NACO recipes is shown.

Selecting the appropriate recipe, *naco\_img\_dark*, will open a *Gasgano* recipe execution window (see Figure 4.2.5 on page 19), having all the specified files listed in its *Input Frames* panel.

Help about the recipe may be obtained from the *Help* menu. Before launching the recipe, its parameters may be modified on the *Parameters* panel (on top). The window contents might be saved for later use by selecting the *Save Current Settings* entry from the *File* menu, as shown in figure.

At this point the recipe can be launched by pressing the *Execute* button. Messages from the running recipe will appear on the *Log Messages* panel at bottom, and in case of successful completion the products will be listed on the *Output Frames* panel, where they can be easily viewed and located back on the Gasgano main window. The succesful processing of the example data can be seen in figure 4.2.6 on page 20.

Please refer to the *Gasgano User's Manual* [14] for a more complete description of the *Gasgano* interface.

## 4.2.2 Using EsoRex

*EsoRex* is a command line utility for running pipeline recipes. It may be embedded by users into data reduction scripts for the automation of processing tasks. On the other side, *EsoRex* doesn't offer all the facilities available with *Gasgano*, and the user must classify and associate the data using the information contained in the FITS header keywords (see Section 6.1, page 22). The user should also take care of defining the input set-of-frames and the appropriate configuration parameters for each recipe run:

**The set-of-frames:** Each pipeline recipe is run on a set of input FITS data files. When using *EsoRex* the file names must be listed together with their DO category in an ASCII file, the *set-of-frames* (SOF), that is

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	16 of 56



Figure 4.2.3: The Gasgano main window with the example FITS files loaded.

required when launching a recipe.<sup>1</sup>

Here is an example of SOF, valid for the *naco\_img\_jitter* recipe:

```

/data/2002-03-27/NACO.2002-03-27T08:30:20.560.fits    IM_JITTER_OBJ
/data/2002-03-27/NACO.2002-03-27T08:31:45.132.fits    IM_JITTER_OBJ
/data/2002-03-27/NACO.2002-03-27T08:33:05.673.fits    IM_JITTER_OBJ
/data/2002-03-27/NACO.2002-03-27T08:34:27.519.fits    IM_JITTER_OBJ
/data/calib/flat.fits                                    MASTER_IMG_FLAT
/data/calib/bpm.fits                                     BPM

```

Note that the NACO pipeline recipes do not verify the correctness of the DO category specified by the user in the SOF. The reason of this lack of control is that NACO recipes are just one component of the complete pipeline running on Paranal, where the task of data classification and association is carried out by separate applications. Using *Gasgano* as an interface to the pipeline recipes will however ensure a correct classification of all the data frames, assigning the appropriate DO category to each one of them (see section 4.2.1 on page 14).

A recipe handling an incorrect SOF may stop or display unclear error messages at best. In the worst cases, the recipe would apparently run without any problem, producing results that may look reasonable, but are actually flawed.

**EsoRex syntax:** The basic syntax to use ESOREX is the following:

**esorex [esorex\_options] recipe\_name [recipe\_options] set\_of\_frames**

To get more information on how to customise ESOREX (see also [13]) run the command:

**esorex - -help**

To generate a configuration file esorex.rc in the directory \$HOME/.esorex run the command:

<sup>1</sup>The set-of-frames corresponds to the *Input Frames* panel of the *Gasgano* recipe execution window (see Figure 4.2.5 on page 19).



ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	17 of 56

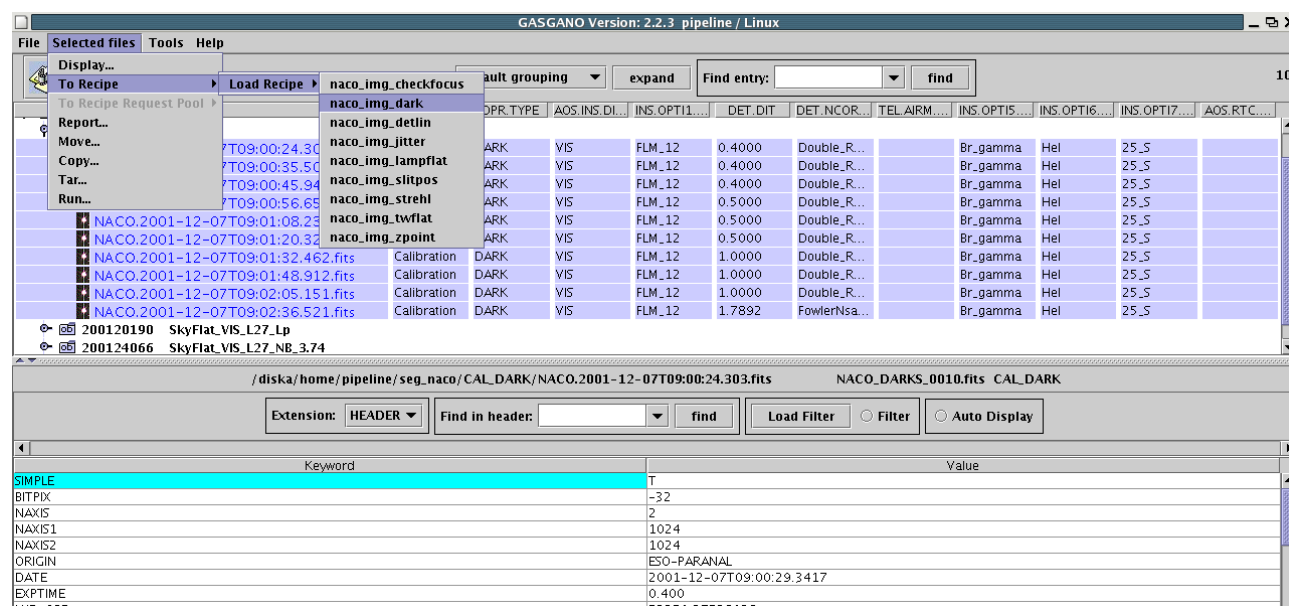


Figure 4.2.4: The Gasgano main window with selected files and the pull-down-menu with the NACO recipes.

### esorex - -create-config

A list of all available recipes, each with a one-line description, can be obtained using the command:

### esorex - -recipes

All recipe parameters (aliases) and their default values can be displayed by the command

### esorex - -params recipe\_name

To get a brief description of each parameter meaning execute the command:

### esorex - -help recipe\_name

To get more details about the given recipe give the command at the shell prompt:

### esorex - -man-page recipe\_name

**Recipe configuration:** Each pipeline recipe may be assigned an *EsoRex* configuration file, containing the default values of the parameters related to that recipe.<sup>2</sup> The configuration files are normally generated in the directory `$HOME/.esorex`, and have the same name as the recipe to which they are related, with the file name extension `.rc`. For instance, the recipe `naco_img_jitter` has its *EsoRex* generated configuration file named `naco_img_jitter.rc`, and is generated with the command:

### esorex - -create-config naco\_img\_jitter

The definition of one parameter of a recipe may look like this:

```
# --xcorr
# Cross correlation search and measure sizes.
```

<sup>2</sup>The *EsoRex* recipe configuration file corresponds to the *Parameters* panel of the *Gasgano* recipe execution window (see Figure 4.2.5 on page 19).

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	18 of 56

```
naco.naco_img_jitter.xcorr=40,40,65,65
```

In this example, the parameter `naco.naco_img_jitter.xcorr` is set to the value `40,40,65,65`. In the configuration file generated by *EsoRex*, one or more comment lines are added containing information about the possible values of the parameter, and an alias that could be used as a command line option.

The recipes provided by the NACO pipeline are designed to be usable in a cascade of data reduction steps, each controlled by its own parameters. For this reason and to prevent parameter name clashes we specify as parameter prefix not only the instrument name but also the name of the step they refer to. Shorter parameter aliases are made available for use on the command line.

The command

**esorex - -create-config recipe\_name**

generates a default configuration file **recipe\_name.rc** in the directory **\$HOME/.esorex**<sup>3</sup>.

A recipe configuration file different from the default one can be specified on the command line:

**esorex - -recipe-config=my\_alternative\_recipe\_config**

Recipe parameters are provided in Section 9 and their role is described in Section 10.

More than one configuration file may be maintained for the same recipe but, in order to be used, a configuration file not located under `$HOME/.esorex`, or having a name different from the recipe name, should be explicitly specified when launching a recipe.

**Recipe execution:** A recipe can be run by specifying its name to *EsoRex*, together with the name of a set-of-frames. For instance, the following command line would be used to run the recipe *naco\_img\_jitter* for processing the files specified in the set-of-frames *naco\_img\_jitter.sof*:

**esorex naco\_img\_jitter naco\_img\_jitter.sof**

The recipe parameters can be modified either by editing directly the used configuration file, or by specifying new parameter values on the command line using the command line options defined for this purpose. Such command line options should be inserted after the recipe name and before the SOF name, and they will supersede the system defaults and/or the configuration file settings. For instance, to set the *naco\_img\_jitter* recipe *xcorr* parameter to `20,20,65,65`, the following should be typed:

**esorex naco\_img\_jitter - -xcorr="20,20,65,65" naco\_img\_jitter.sof**

For more information on *EsoRex*, see [13].

---

<sup>3</sup>If a number of recipe parameters are specified on the command line, the given values will be used in the created configuration file.

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	19 of 56

File Help

Current Queued Executing

**Parameters**

Name	Value	Default	Range
naco.naco_img_dark.rej_bord	200 200 200 200	200 200 200 200	
naco.naco_img_dark.hot_threshold	10.0	10.0	
naco.naco_img_dark.cold_threshold	6.0	6.0	
naco.naco_img_dark.dev_threshold	5.0	5.0	
naco.naco_img_dark.nsamples	100	100	
naco.naco_img_dark.hsize	2	2	

**Input Frames**

Include	Filename	Classification		
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:00:24.303.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:00:35.509.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:00:45.948.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:00:56.650.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:01:08.231.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:01:20.328.fits	CAL_DARK	Locate	Display

**Product Naming**

Product Root Directory: /diska/home/pipeline Browse Naming Scheme: Numeric

Execute

**Request Pool**

Add to pool

Execute Selected

**Output Frames**

Clear

**Log Messages**

Save Clear

Figure 4.2.5: The Gasgano recipe window with the recipe naco\_img\_dark.

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	20 of 56

File Help

Current Queued Executing

**Parameters**

Name	Value	Default	Range
naco.naco_img_dark.rej_bord	200 200 200 200	200 200 200 200	
naco.naco_img_dark.hot_threshold	10.0	10.0	
naco.naco_img_dark.cold_threshold	6.0	6.0	
naco.naco_img_dark.dev_threshold	5.0	5.0	
naco.naco_img_dark.nsamples	100	100	
naco.naco_img_dark.hsize	2	2	

**Input Frames**

Include	Filename	Classification		
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:00:24.303.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:00:35.509.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:00:45.948.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:00:56.650.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:01:08.231.fits	CAL_DARK	Locate	Display
<input checked="" type="checkbox"/>	NACO.2001-12-07T09:01:20.328.fits	CAL_DARK	Locate	Display

**Product Naming**

Product Root Directory: /diska/home/pipeline Browse Naming Scheme: Numeric

Execute

**Output Frames**

Filename	Classification		
naco_img_dark_set01_avg_0000.fits	NACO_IMG_DARK_AVG	Locate	Display
naco_img_dark_set01_hotpix_0000.fits	NACO_IMG_DARK_HOT	Locate	Display
naco_img_dark_set01_coldpix_0000.fits	NACO_IMG_DARK_COLD	Locate	Display
naco_img_dark_set01_devpix_0000.fits	NACO_IMG_DARK_DEV	Locate	Display
naco_img_dark_set02_avg_0000.fits	NACO_IMG_DARK_AVG	Locate	Display
naco_img_dark_set02_hotpix_0000.fits	NACO_IMG_DARK_HOT	Locate	Display
naco_img_dark_set02_coldpix_0000.fits	NACO_IMG_DARK_COLD	Locate	Display
naco_img_dark_set02_devpix_0000.fits	NACO_IMG_DARK_DEV	Locate	Display

**Log Messages**

Save Clear

```

/diska/home/pipeline/naco_img_dark_set02_coldpix_0000.fits
/diska/home/pipeline/naco_img_dark_set02_devpix_0000.fits
/diska/home/pipeline/naco_img_dark_set03_avg_0000.fits
/diska/home/pipeline/naco_img_dark_set03_hotpix_0000.fits
/diska/home/pipeline/naco_img_dark_set03_coldpix_0000.fits
/diska/home/pipeline/naco_img_dark_set03_devpix_0000.fits
Completion status: SUCCESS

```

Figure 4.2.6: The Gasgano recipe window with the recipe naco\_img\_dark successfully completed.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	21 of 56

## 5 Known Problems

There are some features on the NACO data that are challenging for the data reduction pipeline, or simply that cannot be corrected by an automatic tool. For some of these, some additional interactive data analysis may be necessary to remove them.

One of them is described below:

### 5.1 50 Hz noise

The 50 Hz noise effect comes and disappears in a sporadic manner in NACO data, appearing as horizontal stripes in the images.

### 5.2 Vertical Stripes

Similarly, images may contain vertical stripes every 8 pixels in a quadrant.

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	22 of 56

## 6 Instrument Data Description

NACO data uses the FITS format and can be separated into *raw* frames and *product* frames. Raw frames are the unprocessed output of the NACO instrument observations, while product frames are the result of the NACO pipeline processing.

Any raw or product frame can be classified on the basis of a set of keywords read from its header. Data classification is typically carried out by the DO or by *Gasgano* [14], that apply the same set of classification rules. The association of a raw frame with calibration data (e.g. of a science frame with a dark or flat field) can be obtained by matching the values of a different set of header keywords.

Each kind of *raw* frame is typically associated to a single NACO pipeline recipe, i.e. the recipe assigned to the reduction of that specific frame type. In the pipeline environment this recipe would be launched automatically.

In the following all raw NACO data frames, that can be reduced by the NACO pipeline version 4.3.1, are listed, together with the keywords used for their classification and correct association. The indicated *DO category* is a label assigned to any data type after it has been classified, which is then used to identify the frames listed in the *Set of Frames* (see section 4.2.2 on page 15).

### 6.1 General Data Layout

A raw NACO file always has the images stored in the primary FITS data unit. In nodding mode, it consists of one image, in chopping mode, the two Half-Cycle images are stored as a cube with NAXIS3=2.

### 6.2 Imaging frames

- **Science observation (Jittered object and sky images):**

Processed by: `naco_img_jitter`

Association keywords: INSTRUME = NACO

Classification:

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
SCIENCE	OBJECT	IMAGE, JITTER	IM_JITTER_OBJ
SCIENCE	SKY	IMAGE, JITTER	IM_JITTER_SKY
SCIENCE	SKY	POLARIMETRY, WIRE_GRID, JITTER	POL_JITTER_SKY
SCIENCE	OBJECT	POLARIMETRY, WIRE_GRID, JITTER	POL_JITTER_OBJ

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.

- **Imaging dark calibration:**

Processed by: `naco_img_dark`

Association keywords: INSTRUME = NACO

Classification:

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	23 of 56

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
CALIB	DARK	IMAGE	CAL_DARK

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.

- **Imaging Twilight flat field calibration:**

Processed by: `naco_img_twflat`

Association keywords: INSTRUME = NACO

Classification:

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
CALIB	FLAT, SKY	IMAGE	CAL_FLAT_TW

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.

- **Imaging Lamp flat field calibration:**

Processed by: `naco_img_lampflat`

Association keywords: INSTRUME = NACO

Classification:

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
CALIB	FLAT, LAMP	IMAGE	CAL_FLAT_LAMP

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.

- **Strehl Ratio Computation:**

Processed by: `naco_img_strehl`

Association keywords: INSTRUME = NACO

Classification:

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
CALIB	PSF	IMAGE	CAL_PSF
TECHNICAL	PSF	IMAGE	TECH_PSF

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.

- **Zero Point calibration image:**

Processed by: `naco_img_zpoint`

Association keywords: INSTRUME = NACO

Classification:

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
CALIB	STD	IMAGE, JITTER	CAL_STD_JITTER

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	24 of 56

- **Focus check calibration:**

Processed by: naco\_img\_checkfocus

Association keywords: INSTRUME = NACO

Classification:

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
TECHNICAL	FOCUS	IMAGE	TECH_FOCUS

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.

- **Image for slit position calibration:**

Processed by: naco\_img\_slitpos

Association keywords: INSTRUME = NACO

Classification:

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
TECHNICAL	SLIT	IMAGE	SLIT_IMG

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.

- **Lamp and dark images for linearity calibration:**

Processed by: naco\_img\_detlin

Association keywords: INSTRUME = NACO

Classification:

DPR.CATG	DPR.TYPE	DPR.TECH	DO Category
CALIB	LAMP, LINEARITY	IMAGE	CAL_DET LIN_LAMP
CALIB	OTHER, LINEARITY	IMAGE	CAL_DET LIN_DARK

See [4] for a definition of the values of DPR.CATG, DPR.TYPE and DPR.TECH.



<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	25 of 56

## 7 Static Calibration Data

For NACO, the static calibration data are the standard stars catalogs. These data are actually stored internally in the pipeline distribution, and automatically available when the pipeline is installed. These data cannot be updated or corrected without a complete re-installation of the pipeline. In future versions, it is planned to take them out of the distribution and put them in separate calibration files to allow the users to update them.

### 7.1 Standard Star Catalogs

The standard star catalogs are used by the `naco_img_zpoint` recipe to get the magnitude of the observed standard star to compute the Zero Point.

Stars are currently taken from the following catalogs:

- Arnica (41 entries)
- ESO Van der Bliik (264 entries)
- NACO and ISAAC specific (9238 entries)
- LCO Palomar (64 entries)
- LCO Palomar NICMOS red stars (26 entries)
- MSSSO Photometric (54 entries)
- MSSSO Spectroscopic (343 entries)
- SAAO Carter (67 entries)
- UKIRT extended (54 entries)
- UKIRT fundamental (33 entries)
- UKIRT LM (36 entries)
- UKIRT standards (89 entries)

Each entry in the catalog corresponds to one standard star. They all contain the following information:

- The name of the star
- The position (RA / DEC) of the star
- The spectral type of the star
- The magnitudes in the bands J, H, K, Ks, L, M, Lprime, Mprime

The pipeline uses the position (RA / DEC) to select the proper standard star, rather than the star name which is included in the catalog just as a reference point.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	26 of 56

## 8 Data Reduction

This section provides first an overview of the main issues the data reduction needs to address, with a list of the required recipes plus data. Secondly it indicates the data reduction sequence necessary to reduce calibration and science data.

### 8.1 Data reduction overview

In SW<sup>4</sup> imaging mode, the used observation technique is jittering. Small shifts in position are applied between successive frames. This way, with a set of a sufficient number of frames, it is possible to make a precise estimation of the sky brightness for all the pixels of the detector, the sky estimation being the most important and difficult part usually in Infra Red imaging.

In LW<sup>5</sup> mode, the level of the background is too high, and it becomes necessary to apply the chopping observation technique to get rid of the sky. The chopping consists of moving the M2 mirror at a high frequency to take two simultaneous images of two parts of the sky. Those two images are referred to as Half-Cycle frames. They are subtracted to remove the sky contribution.

In LW imaging mode, the chopping is used together with the jitter technique.

#### 8.1.1 Dark variations (SW)

The NACO infrared detector dark is a function of the detector integration time (DIT). It also varies in time, most notably at the rows where the reading of the detector starts, that is rows 1, 2, 3, ... and rows 513, 514, 515, ...

These dark variations are non-uniform across the array, but are uniform along most rows. These variations are usually not a serious problem, and do not prevent one from using all the images.

#### 8.1.2 Odd-even column effect (SW)

This effect can be seen as an offset between the odd and even columns of the array. It is a function of the illumination of the array and it evolves with time.

#### 8.1.3 50Hz pickup (SW)

The Aladdin array suffers from 50Hz noise, which appears as stripes that are almost aligned with detector rows. The strength of the pickup depends on how the array is readout and is a function of time.

#### 8.1.4 Detector linearity (SW/LW)

The detector linearity, as measured over a representative region of the array, can be fitted with the polynomial

---

<sup>4</sup>Short Wavelength uses filters with wavelengths shorter than 2.5  $\mu m$ .

<sup>5</sup>Using Long Wavelength filters.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	27 of <a href="#">56</a>

$$f_C = a * f_M + b * f_M^2 + c * f_M^3 + d * f_M^4 \quad (1)$$

where  $f_M$  is the the measured flux and  $f_C$  is the corrected flux.

### 8.1.5 Electronic ghosts

For bright sources, one can see electronic ghosts which are 8, 16, 24, etc. rows away from the true source. The amplitude of these ghosts depends on the brightness of the source, their position relative to the central row and how fast the array is read. The faster the array is read, the stronger these ghosts are.

## 8.2 Required input data

To be able to reduce science data one needs to use raw data, calibration data and pipeline recipes in a given sequence which provides all the input necessary to each pipeline recipe. This sequence is called a data reduction cascade.

Calibration data products can be generated from raw data using the pipeline recipes.

## 8.3 Reduction Cascade

The imaging reduction cascade is described on figure [8.3.1](#). The map indicates that a master flat field with a bad pixel map from the twilight flat recipe is needed. The use of flat fields and bad pixel maps are in fact optional, and the master flat field can be provided by the lampflat recipe.



<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	29 of 56

## 9 Pipeline Recipe Interfaces

In this section we provide for each recipe examples of the required input data.

We also provide a list of the pipeline products for each recipe, indicating their default recipe name, the value of the FITS keyword HIERARCH ESO PRO CATG (in short PRO.CATG) and a short description.

For each recipe we also list the input parameters (as they appear in the recipe configuration file), the corresponding aliases for the command line usage, and their default values. Also quality control parameters are listed. Those are stored in the headers of the relevant pipeline products. More information on instrument quality control can be found at [\[5\]](#).

In addition to the products mentioned below, recipes which compute quality control parameters also produce a PAF (VLT PArameter File) which is an intermediate pipeline data file containing those QC values.

### 9.1 naco\_img\_jitter

This recipe is for imaging science data. It reduces the data to create a clean combined image.

#### 9.1.1 Input

The recipe expects frames marked with IM\_JITTER\_OBJ and IM\_JITTER\_SKY (whether they are objects or sky frames) in non-chopping mode.

The user may optionally provide a bad pixel map (tagged BPM), a flat field (MASTER\_IMG\_FLAT) and/or dark frames (DARK), see [10.1.1 on page 39](#).

#### 9.1.2 Output

The produced image is the combined image named naco\_img\_jitter.fits (PRO CATG = COADDED\_IMG or COADDED\_CUBE\_IMG for cube data).

#### 9.1.3 Quality control

**QC BACKGD** The median of the background values

**QC IQ** The Image Quality

**QC FWHM PIX** The average FWHM in pixels

**QC FWHM ARCSEC** The average FWHM in arc seconds

#### 9.1.4 Parameters

**off** The offsets text file (default is NULL)

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	30 of 56

**objs** The correlation object(s) position(s) (default is NULL)

**xcorr** Cross correlation search and measure sizes in x and y (default is 40,40,65,65)

**union** Create the union of the frames. (default is true)

**rej** High and Low rejections for the stacking (default is 2,2)

## 9.2 naco\_img\_dark

This recipe creates one master dark image, one map of hot pixels, one map of cold pixels, one map of deviant pixels, for one or more instrument settings, and computes the Read-Out Noise (RON) of the detector.

### 9.2.1 Input

This recipe expects input frames classified as CAL\_DARK. These frames are first categorized by the recipe by different settings (exposure time (EXPTIME), read-out mode (NCORRS), detector mode (MODE NAME), OPTI7 NAME, each setting is then reduced separately.

### 9.2.2 Output

For each instrument setting, numbered  $i$ ,  $i = 01, 02, 03, \dots$ , the following image products are created:

**Master dark** named naco\_img\_dark\_set*i*\_avg.fits with PRO CATG = NACO\_IMG\_DARK\_AVG.

**Map of hot pixels** named naco\_img\_dark\_set*i*\_hotpix.fits with PRO CATG = NACO\_IMG\_DARK\_HOT.

**Map of cold pixels** named naco\_img\_dark\_set*i*\_coldpix.fits with PRO CATG = NACO\_IMG\_DARK\_COLD.

**Map of deviant pixels** named naco\_img\_dark\_set*i*\_devpix.fits with PRO CATG = NACO\_IMG\_DARK\_DEV.

### 9.2.3 Quality control

The quality control parameters are computed for each setting. Within each setting, the Read-out Noise is computed on each of the difference images  $\text{dark}_{j+1} - \text{dark}_j$ ,  $j = 1, 2, \dots, N_{\text{setsize}} - 1$ .

**QC DARKMED** The mdiean of the central part of the master dark.

**QC NBHOTPIX** The number of hot pixels.

**QC NBCOLPIX** The number of cold pixels.

**QC NBDEVPIX** The number of deviant pixels.

**QC RON<sub>j</sub>** Read Out Noise computed from the difference of the images  $j + 1$  and  $j$ .

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	31 of 56

### 9.2.4 Parameters

**nsamples** Number of samples used to compute the RON (default 100)

**hsize** Half-size of the boxes used to compute the RON (default 2)

**hot\_threshold** Hot pixel map threshold (default 10.0)

**cold\_threshold** Cold pixel map threshold (default 6.0)

**dev\_threshold** Deviant pixel map threshold (default 5.0)

**rej\_bord** Ignored left right bottom and top border for median and RON computation (default (in pixel) "200 200 200 200")

## 9.3 naco\_img\_twflat

This recipe creates one master flat field, optionally one bad pixel map, optionally one intercept image and optionally one error map for one or more instrument settings.

### 9.3.1 Input

This recipe expects input frames classified as CAL\_FLAT\_TW, and optionally dark frames classified as CAL\_DARK. If, for a given instrument setting, dark frames are provided, there must be either one per flat frame, or just one (which would be used for dark correction on all the frames with that setting).

These frames are first categorized by the recipe by different settings (DIT, read-out mode name (NCORRS NAME), detector mode (MODE NAME), filter (OPT[456] ID)), each setting is then reduced separately.

### 9.3.2 Output

For each instrument setting, numbered  $i$ ,  $i = 01, 02, 03, \dots$ , the following image products are created:

**Master flat** named naco\_img\_twflat\_set*i*.fits with PRO CATG = MASTER\_IMG\_FLAT.

**Map of bad pixels** (optional) named naco\_img\_twflat\_set*i*\_bpm.fits with PRO CATG = MASTER\_IMG\_FLAT\_BADPIX.

**Intercept Map** (optional) with the constant value of the fit, is named naco\_img\_twflat\_set*i*\_inter.fits with PRO CATG = MASTER\_IMG\_FLAT\_INTERC.

**Error Map** (optional) with the error bar of the fit, is named naco\_img\_twflat\_set*i*\_errmap.fits with PRO CATG = MASTER\_IMG\_FLAT\_ERRMAP.

### 9.3.3 Quality control

None.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	32 of 56

### 9.3.4 Parameters

**rej\_bord** Ignored left right bottom and top border for median and RON computation (default (in pixel) "200 200 200 200")

**thresholds** Low and high thresholds for the Bad Pixel Map (default "0.5 2.0")

**proport** Use the proportional fit (default false)

**bpm** Create the bad pixel map (default false)

**intercept** Create the intercept image (default false)

**errmap** Create the error map (default false)

## 9.4 naco\_img\_lampflat

This recipe creates for each of one or more instrument settings a master lamp flat field.

### 9.4.1 Input

This recipe requires input frames classified as CAL\_FLAT\_LAMP and with values of the FITS cards with key "HIERACH ESO INS LAMP2 SET" that alternate between zero and non-zero (with non-zero for the first frame). It is further required that the light from the lamp is in a range without a significant thermal background.

These frames are first categorized by the recipe by different settings (DIT, read-out mode name (NCORRS NAME), detector mode (MODE NAME), filter (OPT[564] ID), OPTI3 and OPTI7 NAME), each setting is then reduced separately.

### 9.4.2 Output

For each instrument setting, numbered  $i$ ,  $i = 01, 02, 03, \dots$ , the following image products are created:

**Master lamp flat** named naco\_img\_lampflat\_set*i*.fits with PRO CATG = MASTER\_LAMP\_FLAT.

### 9.4.3 Quality control

**QC GAIN** The conversion factor in  $e^-/\text{ADU}$

**QC FPNOISE** The fixed pattern noise

**QC LAMPFLUX** The median flux of the difference between the first lamp-on and the first lamp-off flats, divided by the DIT. Used to monitor the lamp evolution.



<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	33 of 56

#### 9.4.4 Parameters

**rej\_bord** Ignored left right bottom and top border for median and RON computation (default (in pixel) "200 200 200 200")

### 9.5 naco\_img\_strehl

This recipe estimates the strehl ratio and its error bound.

#### 9.5.1 Input

The frames must comprise at least one pair of files and they must be tagged either CAL\_PSF (or TECH\_PSF).

#### 9.5.2 Output

For each image pair the difference is computed and saved as a product with the name naco\_img\_strehli.fits with either PRO CATG = NACO\_IMG\_STREHL\_CAL or NACO\_IMG\_STREHL\_TECH depending on the tag of the input frames.

#### 9.5.3 Quality control

For each computed difference image the following QC parameters are produced:

**QC AIRMASS** Average airmass

**QC STREHL** Strehl ratio

**QC STREHL FLUX** Flux of the source used for strehl computation

**QC STREHL PEAK** Peak value of the source used for strehl computation

**QC STREHL ERROR** Error bound on strehl ratio

**QC STREHL RMS** RMS of background in strehl computation

**QC STREHL POSX** x position of the reference object

**QC STREHL POSY** y position of the reference object

#### 9.5.4 Parameters

**star\_r** Star radius in Arcseconds (default is 2.0)

**bg\_r1** Background ring internal radius in Arcseconds (default is 2.0)

**bg\_r2** Background ring external radius in Arcseconds (default is 3.0)

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	34 of 56

## 9.6 naco\_img\_zpoint

This recipe computes the Zero Point magnitude, i.e. the magnitude of an object that produces one count per second. The Zero Point magnitude usually exceeds 22.

### 9.6.1 Input

The recipe expects a set of 5 frames with a standard star exposure for each. The first frame must have the standard star around the center, for the other frames, the star appears usually on the 4 quadrants of the detector. The frames are tagged with CAL\_STD\_JITTER in non-chopping mode, or CAL\_STD\_CHOP in chopping mode. The recipe optionally uses a flat field (tagged with MASTER\_IMG\_FLAT).

### 9.6.2 Output

One or optionally two files are produced. The first is a FITS-table named naco\_img\_zpoint.fits (PRO CATG = ZPOINT\_TABLE) containing for each standard star the photometry computed as exemplified below.

POSX	POSY	ZPOINT	PEAK	FLUX	BGD_NOISE	STREHL	STREHL_ERR	BGD	FWHMX	FWHMY
462.57	474.98	22.118	5372.1	173295	3.4754	0.5352	0.0023	-6.222	2.9473	3.58018
682.24	692.90	22.106	5984.8	171349	3.5342	0.6030	0.0024	4.6597	4.0332	3.01142
682.22	692.86	22.089	5983.6	168731	3.5262	0.6123	0.0024	-1.838	4.0340	3.00890
243.70	694.82	22.127	5530.6	174735	3.5873	0.5465	0.0024	2.5351	3.2022	3.12375
243.75	694.83	22.196	5528.2	186163	3.6515	0.5127	0.0023	-4.548	3.1945	3.12335
242.93	256.99	22.263	5332.6	198035	3.4772	0.4649	0.0020	3.6361	3.4420	4.08671
243.00	257.08	22.211	5329.7	188770	3.6259	0.4875	0.0022	-8.486	4.0959	2.79183
681.71	255.57	22.070	5160.0	165727	3.5003	0.5376	0.0025	5.2507	4.2373	3.12596

The second, optional product is an image named naco\_img\_zpoint\_check.fits with the extracted stars. It can be used to manually verify that stars have been properly used for the computation (PRO CATG = ZPOINT).

### 9.6.3 Quality control

**QC FILTER OBS** The name of the filter from the header of the raw files

**QC AMBI RHUM AVG** The humidity average

**QC ZPOINT** The computed zero point

**QC ZPOINTRMS** The error on the zero point

**QC STDNAME** The name of the standard star

**QC STARMAG** The magnitude of the standard star

**QC CATNAME** The catalog name where the star has been found

**QC STREHL** Strehl ratio

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	35 of 56

**QC STREHL ERROR** Error bound on strehl ratio

**QC STREHL FLUX** Flux of the source used for strehl computation

**QC STREHL PEAK** Peak value of the source used for strehl computation

**QC STREHL RMS** RMS of background in strehl computation

#### 9.6.4 Parameters

**star\_r** Star radius in pixels (default is 30)

**bg\_r1** Background ring internal radius in pixels (default is 40)

**bg\_r2** Background ring external radius in pixels (default is 60)

**ra** RA position (default is 999.0 for unknown)

**dec** DEC position (default is 999.0 for unknown)

**mag** star magnitude (default is 99.0 for unknown)

**sx** Search size in pixels in the x direction (default is 10)

**sy** Search size in pixels in the y direction (default is 10)

**check\_im** Flag to activate the 'check' image creation (default is FALSE)

**pscale** Can optionally be used instead of the value found in the value of the FITS-card 'ESO INS PIXSCALE' in the header of the first raw file.

### 9.7 naco\_img\_checkfocus

This recipe checks the focus.

#### 9.7.1 Input

The recipe expects a set of at least four frames, all tagged TECH\_FOCUS. The first frame is used as a dark frame.

#### 9.7.2 Output

No products, only quality control parameters.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	36 of 56

### 9.7.3 Quality control

**QC STREHL** Strehl ratio

**QC STREHL ERROR** Error bound on strehl ratio

**QC FWHM PIX** The full-width at half-maximum of the detected object.

**QC ENERGY** Star energy

**QC FOCUSOPT** The optimal focus

### 9.7.4 Parameters

**star\_r** Star radius in pixels (default is 30)

**bg\_r1** Background ring internal radius in pixels (default is 40)

**bg\_r2** Background ring external radius in pixels (default is 60)

## 9.8 naco\_img\_slitpos

This recipe is used to get the precise positions of the edges of the slit.

### 9.8.1 Input

This recipe expects input frames classified as SLIT\_IMG.

Each frame is an image of a horizontal slit and is reduced separately.

### 9.8.2 Output

For each slit image, numbered  $i$ ,  $i = 01, 02, 03, \dots$ , a table named naco\_img\_slitpos\_ $i$ .fits is created, with PROCATG = SLITPOS\_TABLE.

Each table contains 4 columns as exemplified in Figure 9.8.0.

### 9.8.3 Quality control

**QC SLIT POSANG** The slit angle in degrees (180 for perfect horizontal alignment)

**QC SLIT XPOS** The X position in pixels of the slit center

**QC SLIT YPOS** The Y position in pixels of the slit center

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	37 of 56

```
#
# file          naco_img_slitpos_01.fits
# extensions    1
# -----
# XTENSION      1
# Number of     rows 1024
# Number of     columns 4
#
SLIT_Y  |SLIT_LEFT      |SLIT_CENTER      |SLIT_RIGHT
1       |546.999965984375|549.999982992187|553
2       |546.99996611777 |549.999983058885|553
3       |546.999966251164|549.999983125582|553
4       |546.999966384559|549.999983192279|553
5       |546.999966517953|549.999983258977|553
...
1020    |547.000101913481|550.00005095674 |553
1021    |547.000102046875|550.000051023438|553
1022    |547.00010218027 |550.000051090135|553
1023    |547.000102313664|550.000051156832|553
1024    |547.000102447059|550.000051223529|553
```

Figure 9.8.0: Table created by `naco_img_slitpos`.

## 9.8.4 Parameters

**slit\_w** The slit width in pixels (default 20)

## 9.9 naco\_img\_detlin

This recipe computes the detector linearity.

For each pixel, the DIT is fitted as a function of the intensity using a 4th degree polynomial, with no constant term:

$$D_i(x) = ax + bx^2 + cx^3 + dx^4$$

where  $D_i(x)$  is the DIT and  $x$  is the intensity of pixel  $i$ .

### 9.9.1 Input

This recipe expects three or more pairs of input frames classified as `CAL_DETLIN_LAMP` and `CAL_DETLIN_DARK`.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	38 of 56

### 9.9.2 Output

The following image products are created:

**Coefficient  $a$**  named `naco_img_detlin_A.fits` with PRO CATG = NACO\_IMG\_DETLIN\_A.

**Coefficient  $b$**  named `naco_img_detlin_B.fits` with PRO CATG = NACO\_IMG\_DETLIN\_B.

**Coefficient  $c$**  named `naco_img_detlin_C.fits` with PRO CATG = NACO\_IMG\_DETLIN\_C.

**Coefficient  $d$**  named `naco_img_detlin_D.fits` with PRO CATG = NACO\_IMG\_DETLIN\_D.

**Linearity limit** named `naco_img_detlin_limit.fits` with PRO CATG = NACO\_IMG\_DARK\_LIM.

**Map of bad pixels** named `naco_img_detlin_bpm.fits` with PRO CATG = NACO\_IMG\_DARK\_BPM.

### 9.9.3 Quality control

None.

### 9.9.4 Parameters

**force** Compute the results even if the lamp is not considered stable (default false)

ESO	NACO Pipeline User Manual	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	39 of 56

## 10 Algorithms

In this section the data reduction procedures applied by the 9 pipeline recipes are described.

### 10.1 Recipe Algorithms

#### 10.1.1 `naco_img_jitter`

The basic steps in reducing jittered data are:

1. Removal of the odd-even column effect

In most cases, the odd-even column effect is small enough that it can be ignored. However, if the flux level of the exposure is above 10,000 or if the effect was strong during the exposure, users should think seriously about removing it. Currently, the recipe does not support odd-even correction.

2. Dark subtraction and flat fielding.

If provided, the master dark is subtracted from all images and if provided, a flat field is divided into all images.

3. Flagging bad pixels, removing vignetted regions

The recipe can replace bad pixels by an average of their valid neighbors if a master bad pixel map is provided (using the CPL function [`cpl\_detector\_interpolate\_rejected\(\)`](#), see [10]).

4. Sky subtraction

This is the most important step and great care and a good understanding of the technique are necessary if good results are required.

For each input object image, a sky frame is created and subtracted to the object frame. If in the input set of frame, there are some sky frames provided, the sky estimation is simply the median of those sky frames. This median is then used for all the object frames.

In most cases, there are no sky frames taken, and the sky estimation has to be computed from the object frames. In this case, the median of the object frames is used.

5. Alignment and stacking

To align the sky-subtracted images, it is necessary to precisely estimate the offsets between them.

`naco_img_jitter` applies a 2D cross-correlation routine (using the CPL function [`cpl\_geom\_img\_offset\_combine\(\)`](#), see [10]) to determine the offsets, align and stack the images. An initial estimate of the offsets between frames is taken from the FITS headers, unless the initial estimate is provided as an option to the recipe.

Figure 10.1.1 shows an example of a raw image and the result obtained with the `naco_img_jitter` recipe.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	40 of 56



Figure 10.1.1: *Example of jitter result.*

### 10.1.2 `naco_img_dark`

Dark frames are exposures without detector illumination.

The darks are reduced with the `naco_img_dark` recipe. This recipe first groups the input list of frames by settings, see 9.2 on page 30.

For each setting, the recipe produces one master dark that is simply the average of the input files. Additionally, the dark level and Read-Out Noise (RON) is measured and written as QC parameter.

From the  $n_{\text{set}}$  images in each of the settings,  $n_{\text{set}} - 1$  difference images are formed. The following measurement is applied to each difference image:

- Generate 100  $4 \times 4$  windows on the input pixel surface. These windows are optimally scattered using a Poisson distribution to make sure they sample the whole area with as little overlap as possible.
- Compute the pixel standard deviation in each window.
- The readout noise is the median of all these measured standard deviations multiplied by  $\sqrt{\frac{NDIT}{2}}$ , (computed using the CPL function `cpl_flux_get_noise_window()`, see [10]).

The results are written as QC parameters. For example, an input data set containing 9 frames of 3 different settings will generate 3 master darks (1 per setting) and 2 RON measurements per setting (6 in total).



<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	41 of 56

### 10.1.3 `naco_img_twflat`

NACO imaging data may be flat fielded with twilight flats. Such flats are derived by imaging a region of the twilight sky. Between 10 to 25 exposures with constant DIT and NDIT are taken for each filter and a robust linear fit between the flux in each pixel and the median flux of all pixels is used to produce the flat field.

The implemented algorithm is the following:

- The recipe divides the data into groups with identical settings and processes each group separately.
- If provided, the dark frames are subtracted from the flat frames.
- For each pixel on the detector, a curve is plotted of the median plane value against the individual pixel value in this plane. This curve shows the pixel response from which a robust linear regression provides a pixel gain.
- The image showing all pixel gains (i.e. the flat-field) is normalized to have an average value of 1. This image is the master flat produced.

A master flat is produced for each group of frames with the same instrument settings.

Other products are: a map of the zero-intercepts and an error map of the fit. Both can be used to visually check the validity of the fit. A bad pixel map can also be produced by declaring all pixels whose value after normalization is too far from 1 as bad.

### 10.1.4 `naco_img_lampflat`

Flats can also be produced by using an internal lamp. For each instrument setting the recipe takes a number of lamp-on/off pairs of exposures.

The implemented algorithm is the following:

- The data are categorised by instrument settings, and each setting is separately reduced. The following steps apply for each setting.
- The lamp-off frames are subtracted from the lamp-on frames.
- The average of these difference-images is computed.
- This average is normalized so the central part of the image has a mean value of 1.
- The gain is computed as

$$g = \sqrt{\frac{2\text{mean}(L_1)}{\text{RON}^2(L_1 - L_2) - \text{RON}^2(D_1 - D_2)'}}$$

where  $L_i$  is the  $i$ th lamp frame,  $D_i$  is the  $i$ th dark frame, and  $\text{RON}()$  is the readout noise (computed using the CPL function `cpl_flux_get_noise_window()`, see [10]).

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	42 of 56

- The fixed pattern noise is computed as

$$n_{\text{fp}} = \sqrt{\text{RON}^2(L_1 - D_1) - \text{RON}^2(L_1 - L_2) - \text{RON}^2(D_1 - D_2)}.$$

- The lamp flux is computed as

$$F_l = \frac{1}{\text{DIT}} \text{median}(L_1 - D_1).$$

The normalized average of dark-subtracted flats is the main product, while the gain, fixed pattern noise and lamp flux are quality control parameters.

### 10.1.5 naco\_img\_strehl

The recipe reduces pairs of images of a bright point source, with no overlap of the source between the images in a pair. For each pair the following steps are done:

- The two images are subtracted, thus reducing the noise and producing a difference image with one positive and one negative source. Each difference image is a recipe product.
- The computation of the Strehl ratio is carried out on the difference image in a circle with a radius  $R = 3$  arcseconds (around the center of the positive source. The recipe assumes that the extent of the star is limited by a circle with radius  $R_{\text{star}} = 2$  arcseconds.
- The background flux,  $F_{\text{bg}}$  is estimated as the flux of the pixels located between  $R_{\text{star}}$  and  $R$  whose intensities are in the 90th percentile and not in the 10th percentile.
- The flux of the star,  $F_{\text{star}}$  is computed as the flux within  $R_{\text{star}}$  corrected for  $F_{\text{bg}}$ , and  $I_{\text{star,max}}$  is the peak intensity of the star.
- The ideal Point Spread Function is computed as the inverse Fourier Transform of the ideal Optical Transfer Function, which is based on the telescope and instrument characteristics.  $F_{\text{psf}}$  is the flux of the PSF and  $I_{\text{psf,max}}$  is its peak intensity.
- The Strehl ratio is then

$$\frac{I_{\text{star,max}}}{F_{\text{star}}} / \frac{I_{\text{psf,max}}}{F_{\text{psf}}}.$$

The error bound on the Strehl ratio is

$$c \cdot \pi \cdot \sigma_R \cdot w_{\text{pscale}} \cdot R_{\text{star}}^2 / F_{\text{star}},$$

where  $c = 0.007/0.0271$  is determined empirically, where  $w_{\text{pscale}}$  is the pixel scale (obtained from the FITS card with key `ESO INS PIXSCALE`), and where  $\sigma_R$  is the estimated noise on the pixels located between  $R_{\text{star}}$  and  $R$ , (using the CPL function [cpl\\_flux\\_get\\_noise\\_ring\(\)](#), see [10]).

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	43 of 56

### 10.1.6 naco\_img\_zpoint

Standard stars are observed every night in the J, H and Ks filters. For the Narrow Band filters, standards are observed as required.

Standard stars are imaged over a grid of five positions, one just above the center of the array and one in each quadrant. The recipe finds the standard (it assumes that the star in the first image is near the center), computes the instrumental magnitude, and then uses the standard star database to determine the Zero Point.

The standard star database contains about 1000 stars with magnitudes in the J, H, K, Ks, L and M bands, although most stars only have magnitudes in a subset of these filters.

The implemented recipe is the following:

1. Compute the difference of the successive images (8 differences for 5 input images).
2. In each difference, locate the star around the expected pixel position.
3. Compute the background around the star, and the star flux.
4. Store the flux result in an output table.

This yields  $2(N - 1)$  measurements for  $N$  input frames. From this statistical set, the highest and lowest values are removed, then an average and standard deviation are computed. The conversion formula from ADUs to magnitudes is:

$$zmag = mag + 2.5 \cdot \log_{10} \frac{\text{flux}}{DIT}.$$

where:

- $zmag$  is the computed zero-point.
- $mag$  is the known magnitude of the standard star in the observed band.
- $flux$  is the measured flux in ADUs in the image.
- $DIT$  is the Detector Integration Time.

Note that neither the extinction nor the colour correction are included in the Zero Point. The average airmass is given in the output result file, together with individual airmass values for each frame.

### 10.1.7 naco\_img\_checkfocus

The input raw frames must be exposures of a bright point source made with varying focus values ("ESO AOS INS FOCU ABSPOS"). For each frame the strehl ratio and its error estimate is computed (see [10.1.5 on the facing page](#)). For frames with a strehl error estimate less than 0.1, the strehl ratio  $S$  as a function of the focus value  $f$  is fitted with a second degree polynomial,  $S = af^2 + bf + c$ ,  $a < 0$ .

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	44 of 56

The optimal focus, that maximizes the strehl ratio, is computed from this second degree polynomial as

$$f_{\max} = -\frac{b}{2a}.$$

### 10.1.8 `naco_img_slitpos`

As a health check the observatory takes daily images of using different slits. These images are processed with the `naco_img_slitpos` recipe which measures the slit position.

For every slit image, the slit is detected, and precisely analysed to get its precise position. The slit borders positions are stored in a FITS table.

Each image is flipped around the  $x = y$ -axis before the analysis, thus a perfectly aligned horizontal slit has a slit angle of 180 degrees.

To isolate the slit from other features in the image, a threshold is first applied. Then, successive morphological erosions (with a vertical kernel) are performed until there is one object left. The slit is then reconstructed with dilations (see Figure 10.1.2).

Once the slit is precisely isolated, the edges can easily be detected with a simple thresholding. For each pixel along the slit, the profile is analysed to get the left and the right positions on the slit.

Assuming that the slit is not curved, the left (resp. right) positions are linear-fitted and the fitted positions are written in a table.

### 10.1.9 `naco_img_detlin`

To estimate the linearity of the detector, series of images are taken with a lamp where the integration time is increased. Additionally dark frames (lamp off) are taken with the same integration times as for the 'lamp on' frames. To verify the stability of the lamp during the process, control images are taken (typically after every 5 frames) with a reference short integration time.

The recipe algorithm is the following:

- The dark frames are associated (and subtracted) to the 'lamp on' frames by using the DIT.
- The frames with the same DIT as the first frame are used to check the lamp stability over the whole observation: the average of the images should not vary more than 1 percent.
- The rest of the frames are used to compute the linearity: For each pixel the DIT as a function of the detector count,  $I$ , is fitted with a 4th degree polynomial

$$t_{\text{DIT}} = aI + bI^2 + cI^3 + dI^4,$$

that has a zero-valued constant term. 5 images are produced: One for each polynomial coefficient and one for the error of the fit.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	45 of 56



Figure 10.1.2: *Slit detection.*

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	46 of 56

## A Installation

This chapter gives generic instructions on how to obtain, build and install the NACO pipeline version 4.3.1. Even if this chapter is kept as up-to-date as much as possible, it may not be fully applicable to future releases. For instructions on installation of future releases, the reader is therefore advised to check the installation instructions delivered with such future releases. The supported platforms are listed in Section A.1. It is recommended reading through Section A.2.2 before starting the installation.

A bundled version of the NACO pipeline with all the required tools and an installer script is available from <http://www.eso.org/pipelines>, for users who are not familiar with the installation of software packages.

### A.1 Supported platforms

The NACO pipeline version 4.3.1 is verified and supported on the VLT target platforms:

- Scientific Linux 4.3 (Athlon), using gcc v. 3.3.4
- Linux Red Hat 9 (P4), using gcc v. 3.2.2
- Sun Solaris 8 (SPARC), using gcc 3.3.

The usage of the GNU build tools should allow to build and run the NACO pipeline on a variety of platforms. As such, the NACO pipeline version 4.3.1 is known to build and to produce correct output with esorex on these platforms:

- Scientific Linux 4.0 (Athlon), using gcc v. 3.3.4
- Linux Ubuntu 6.10 (AMD64), using gcc v. 4.1.2
- Linux XUbuntu 6.10 (P4 Mobile, 128MB RAM), using gcc v. 4.1.2
- Linux Fedora Core 6 (P4), using gcc v. 4.1.1
- Linux SuSE 10.2 (AMD64), using gcc v. 4.1.2
- Linux Mandrake 9.0 (P3), using gcc v. 3.2
- Linux Mandrake 8.0 (P3), using gcc v. 2.96
- Mac OS X 10.4.4 (G4), using gcc 3.3

### A.2 Building the NACO pipeline

This section shows how to obtain, build and install the NACO pipeline from the official source distribution.

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	47 of 56

### A.2.1 Requirements

To compile and install the NACO pipeline one needs:

- one of the C compilers listed above,
- a version of the `tar` file-archiving program,
- the GNU software: `gzip`, `perl`, `make`.

On the above mentioned systems a Java Development Kit (JDK) version 1.5.0 will additionally allow the usage of Gasgano (part of this distribution).

### A.2.2 Compiling and installing the NACO pipeline

The NACO pipeline distribution kit 4.3.1 contains:

naco-manual-1.0.pdf  
install\_pipeline  
cfitsio2510.tar.gz  
cpl-4.0.1.tar.gz  
esorex-3.6.5.tar.gz  
gasgano-2.2.7.tar.gz  
naco-3.7.0.tar.gz  
naco-calib-3.7.0.tar.gz

The NACO pipeline manual  
Install script  
CFITSIO 2.510  
CPL 4.0.1  
esorex 3.6.5  
GASGANO 2.2.7  
NACO 3.7.0  
NACO calibration files 3.7.0

Here is a description of the installation procedure:

1. Change directory to where you want to retrieve the NACO pipeline recipes 4.3.1 package. It can be any directory of your choice but not:

```
$HOME/gasgano
$HOME/.esorex
```

2. Download from the ESO ftp server, <http://www.eso.org/pipelines>, the latest release of the NACO pipeline distribution.

3. Unpack using the following command:

```
gzip -dc naco-kit-3.7.0.tar.gz | tar xf -
```

4. Install: after moving to the top installation directory,

```
cd naco-kit-3.7.0
```

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	48 of 56

it is possible to perform a default installation using the available installer script (*recommended*):

```
./install_pipeline
```

(beware: the execution may take a few minutes on Linux and several minutes on SunOS).

By default the script will install the NACO recipes, *Gasgano*, *EsoRex*, all the necessary libraries, and the static calibration tables, into a directory tree rooted at `$HOME`. A different path may be specified as soon as the script is run.

The only exception to all this is the *Gasgano* tool, that will always be installed under the directory `$HOME/gasgano`. Note that the installer will move an existing `$HOME/gasgano` directory to `$HOME/gasgano.old` before the new *Gasgano* version is installed.

Important: the installation script would ensure that any existing *Gasgano* and *EsoRex* setup would be inherited into the newly installed configuration files (avoiding in this way any conflict with other installed instrument pipelines).

Alternatively, it is possible to perform a manual installation (*experienced users only*): the README file located in the top installation directory contains more detailed information about a step-by-step installation.



<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	49 of 56

## B QC Parameters

This appendix describes the QC Parameters created by the NACO pipeline:

Parameter Name: QC FWHM PIX  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %.2f  
Unit: pix  
Comment Field: (pixels) median FWHM in image  
Description: Median value of the full-width at half-maximum of all detected objects in the final reduced frame.

Parameter Name: QC FWHM ARCSEC  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %.2f  
Unit: arcsec  
Comment Field: (arcsec) median FWHM in image  
Description: Median value of the full-width at half-maximum of all detected objects in the final reduced frame, multiplied by the pixel size in arcsec/pixel.

Parameter Name: QC IQ  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %.2f  
Unit: arcsec  
Comment Field: Estimated image quality (arcsec)  
Description: Estimated value of the image quality, based on the median FWHM of all star-like objects in the final product frame.

Parameter Name: QC AMBI RHUM AVG  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %.f  
Unit:  
Comment Field: (percent) ambient relative humidity @ 30/2 m  
Description: Temporal mean of site ambient relative humidity

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	50 of 56

measured at sensor position  $i = 1/2$  in 30m/2m height. This parameter is delivered by the ASM at intervals of typically 1 minute. This keyword stores the average of all measured values during the zero-point measurement.

Parameter Name: QC AIRMASS  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %f  
Unit:  
Comment Field: Average airmass  
Description: Average airmass during the zero-point acquisition.

Parameter Name: QC ZPOINT  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %f  
Unit: mag  
Comment Field: Measured zero-point.  
Description: Measured zero-point.

Parameter Name: QC ZPOINTRMS  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %f  
Unit: mag  
Comment Field: zero-point RMS  
Description: RMS of the zero-point measurement.

Parameter Name: QC FILTER OBS  
Class: header|qc-log  
Context: process  
Type: string  
Value Format: %20s  
Unit:  
Comment Field: Observation filter  
Description: This is the filter used to observe the star. It might be different from the one used to get the star magnitude in the database.

Parameter Name: QC FILTER REF

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	51 of 56

Class: header|qc-log  
 Context: process  
 Type: string  
 Value Format: %20s  
 Unit:  
 Comment Field: Reference filter  
 Description: If the filter used for observation corresponds to an unknown magnitude value in the database, an association rule is used to see which other magnitude could be used. In that case, this value differs from the actually used filter for observation.

Parameter Name: QC FILTER NDENS  
 Class: header|qc-log  
 Context: process  
 Type: string  
 Value Format: %20s  
 Unit:  
 Comment Field: Neutral density filter  
 Description: Neutral density filter (INS.OPTI4.NAME)

Parameter Name: QC FILTER POL  
 Class: header|qc-log  
 Context: process  
 Type: string  
 Value Format: %20s  
 Unit:  
 Comment Field: Polarizer  
 Description: Polarizer (INS.OPTI3.NAME)

Parameter Name: QC STDNAME  
 Class: header|qc-log  
 Context: process  
 Type: string  
 Value Format: %20s  
 Unit:  
 Comment Field: Standard star name  
 Description: Name of the standard star used for ZP computation

Parameter Name: QC CATNAME  
 Class: header|qc-log  
 Context: process  
 Type: string  
 Value Format: %20s

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	52 of 56

Unit:

Comment Field: Standard star catalogue name

Description: Name of the catalogue from which the standard star has been extracted.

Parameter Name: QC SPECTYPE

Class: header|qc-log

Context: process

Type: string

Value Format: %s

Unit:

Comment Field: Standard star spectral type

Description: Standard star spectral type

Parameter Name: QC STARMAG

Class: header|qc-log

Context: process

Type: double

Value Format: %g

Unit:

Comment Field: Standard star magnitude

Description: Standard star magnitude

Parameter Name: QC STREHL

Class: header|qc-log

Context: process

Type: double

Value Format: %f

Unit: none

Comment Field: Strehl ratio

Description: Strehl ratio

Parameter Name: QC STREHL FLUX

Class: header|qc-log

Context: process

Type: double

Value Format: %f

Unit: ADU

Comment Field: Source flux

Description: Flux of the source used for strehl computation

Parameter Name: QC STREHL PEAK

Class: header|qc-log

Context: process

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	53 of 56

Type: double  
 Value Format: %f  
 Unit: ADU  
 Comment Field: Source peak  
 Description: Peak value of the source used for strehl computation

Parameter Name: QC STREHL RMS  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %f  
 Unit: mag  
 Comment Field: RMS of background in strehl computation.  
 Description: RMS of background in strehl computation.

Parameter Name: QC STREHL ERROR  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %f  
 Unit: none  
 Comment Field: Error bound on strehl ratio  
 Description: Error bound on strehl ratio

Parameter Name: QC STREHL POSX  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %f  
 Unit: pixels  
 Comment Field: x position of the reference object  
 Description: x position of the reference object

Parameter Name: QC STREHL POSY  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %f  
 Unit: pixels  
 Comment Field: y position of the reference object  
 Description: y position of the reference object

Parameter Name: QC GAIN  
 Class: header|qc-log

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	54 of <a href="#">56</a>

Context: process  
Type: double  
Value Format: %f  
Unit: electron/ADU  
Comment Field: Gain  
Description: Gain is the conversion factor in e-/ADU

Parameter Name: QC FPNOISE  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %f  
Unit: ADU  
Comment Field: Fixed pattern noise  
Description: Largest noise component in raw images

Parameter Name: QC LAMPFLUX  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %f  
Unit: ADU/s  
Comment Field: The median flux of the first lampflat difference per DIT  
Description: The median flux of the difference between the first lamp-on and the first lamp-off flats, divided by the DIT. Used to monitor the lamp evolution.

Parameter Name: QC RONi  
Class: header|qc-log  
Context: process  
Type: double  
Value Format: %f  
Unit: ADU  
Comment Field: Read-out noise of the ith pair of the set  
Description: Measured read-out noise on the whole array.

Parameter Name: QC NBDEVPIX  
Class: header|qc-log  
Context: process  
Type: integer  
Value Format: %d  
Unit: nb of pixels  
Comment Field: Number of deviant pixels  
Description: Number of deviant pixels

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	55 of 56

Parameter Name: QC NBHOTPIX  
 Class: header|qc-log  
 Context: process  
 Type: integer  
 Value Format: %d  
 Unit: nb of pixels  
 Comment Field: Number of hot pixels  
 Description: Number of hot pixels

Parameter Name: QC NBCOLPIX  
 Class: header|qc-log  
 Context: process  
 Type: integer  
 Value Format: %d  
 Unit: nb of pixels  
 Comment Field: Number of cold pixels  
 Description: Number of cold pixels

Parameter Name: QC DARKMED  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %f  
 Unit: ADU  
 Comment Field: Dark current  
 Description: Median of the dark produced image

Parameter Name: QC ENERGY  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %f  
 Unit: ADU  
 Comment Field: energy  
 Description: Star energy

Parameter Name: QC FOCUS  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %f  
 Unit: ADU  
 Comment Field: focus  
 Description: focus

<b>ESO</b>	<b>NACO Pipeline User Manual</b>	Doc:	VLT-MAN-ESO-19500-3993
		Issue:	Issue 1.1
		Date:	Date 15th May 2012
		Page:	56 of <a href="#">56</a>

Parameter Name: QC FOCUSOPT  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %f  
 Unit: ADU  
 Comment Field: optimal focus  
 Description: optimal focus

Parameter Name: QC SLIT XPOS  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %.3f  
 Unit: pix  
 Comment Field: Average slit x position  
 Description: Provides a measurement of the average position of the slit (in x) on the detector.

Parameter Name: QC SLIT YPOS  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %.3f  
 Unit: pix  
 Comment Field: Average slit y position  
 Description: Provides a measurement of the average position of the slit (in y) on the detector.

Parameter Name: QC SLIT POSANG  
 Class: header|qc-log  
 Context: process  
 Type: double  
 Value Format: %.3f  
 Unit: degree  
 Comment Field: Slit horizontal angle  
 Description: Gives the angle in degrees made by the slit.